
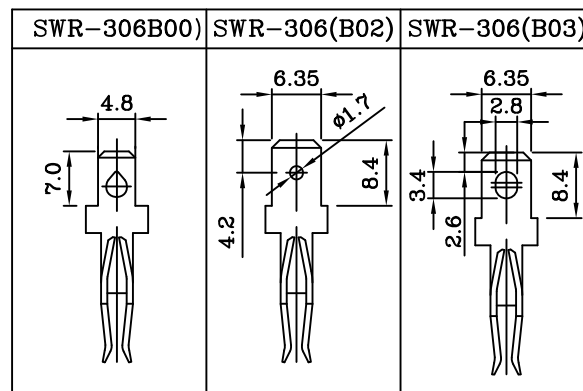
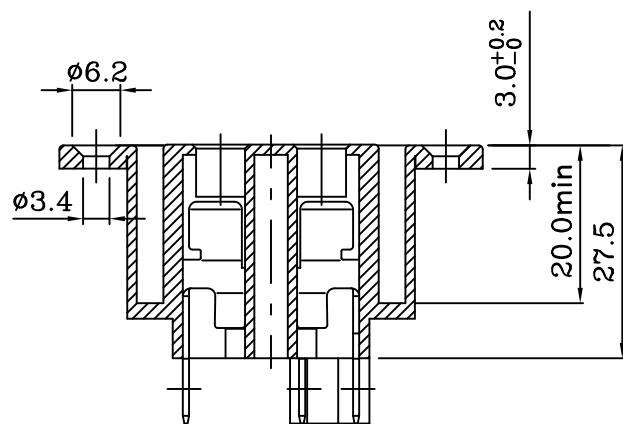
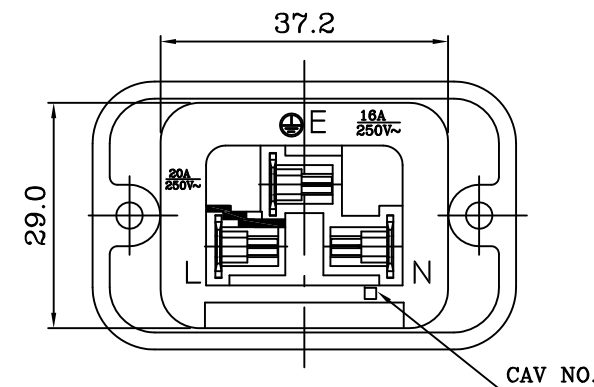
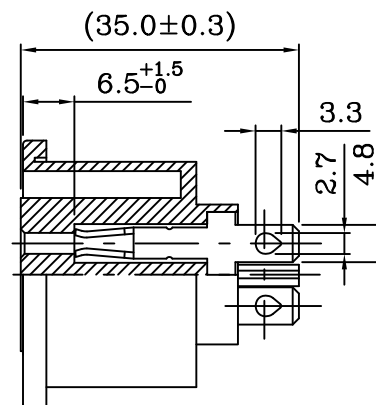


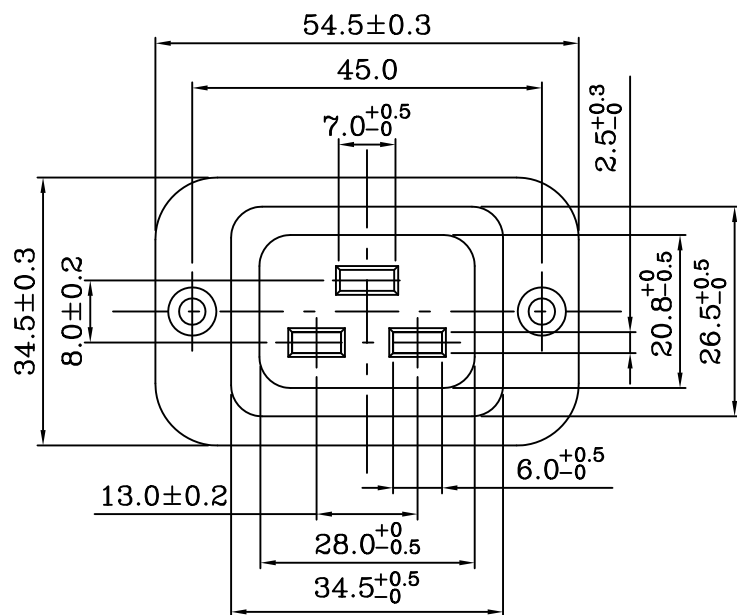

# SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Materil: Black Glass-Fiber Thermoplastic . UL 94V-2~0

|                    |                   |
|--------------------|-------------------|
| Rating:AC 20A 250V |                   |
| Mark               | Safety Regulation |
| cULus              | cULus             |
| Rating:AC 16A 250V |                   |
| Mark               | Safety Regulation |
| VDE                | VDE               |
| CCC                | CCC               |


IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司  
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

UNIT

mm

UNIT QTY

1

SCALE

1:1

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

PRODUCT NO.

SWR-306(B00)

REV

ID NO

09102101Q

INTERIM NO.

DESCRIPTION

NEW NO.

APPROVED BY

羅

2009.10.21

士凱

李

2009.10.21

小英

C