

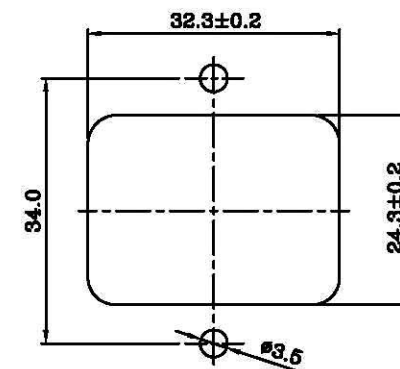
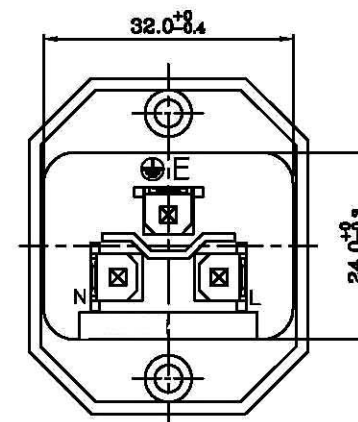
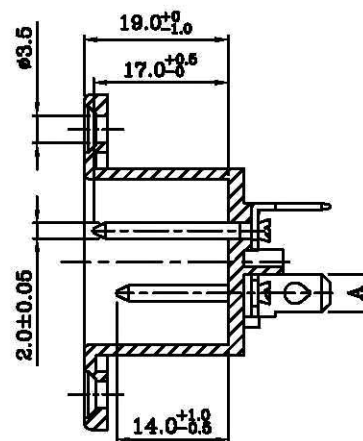


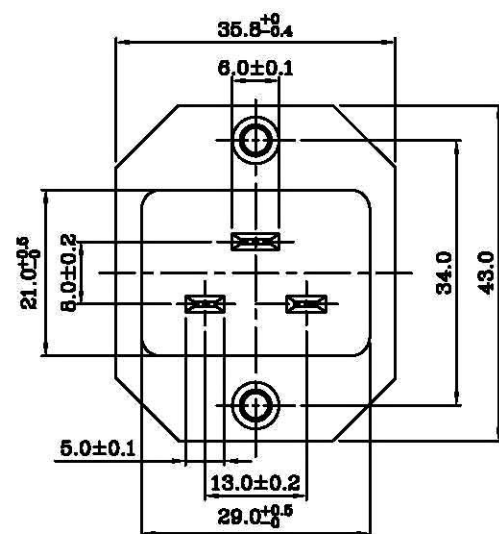

PANEL CUT-OUT

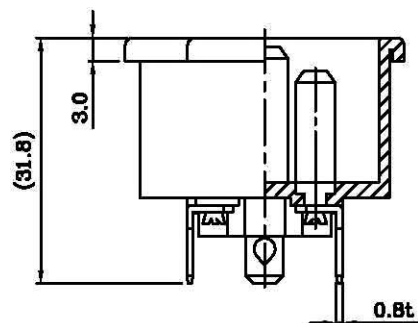

| A          |            |            |
|------------|------------|------------|
| R-305A(00) | R-305A(01) | R-305A(02) |
|            |            |            |

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~0.

| Rating:AC 16A 250V |     |          |    |     |         |
|--------------------|-----|----------|----|-----|---------|
| 符號                 | 安規  | 認證編號     | 符號 | 安規  | 認證編號    |
|                    | VDE | 40006952 |    |     |         |
| Rating:AC 20A 250V |     |          |    |     |         |
|                    | UL  | E184638  |    | CUL | E184638 |

DRAWING:C:DG\NEW-R\T\305A\ (00, 01, 02) B. DWG

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司  
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY

RD  
95.03.17  
張育誠

UNIT

mm

UNIT Q'TY

1

SCALE

1:1

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

ID NO

060317A11

DESCRIPTION

PRODUCT NO.

SWR-305A(XX)

REV

INTERIM NO.

NEW NO.

B