
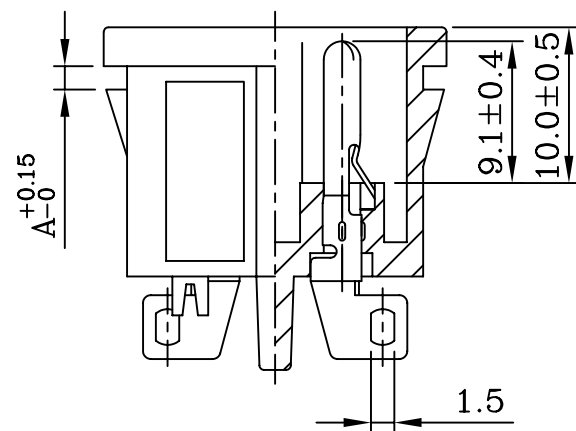
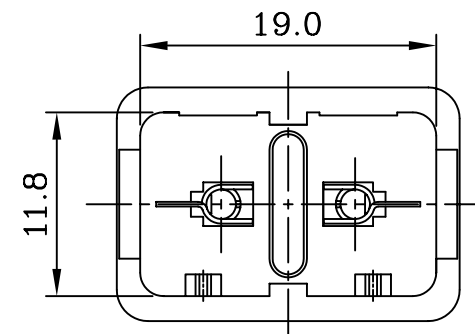
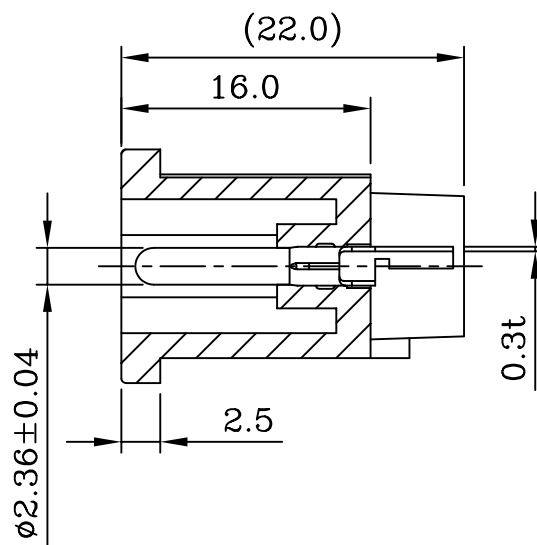


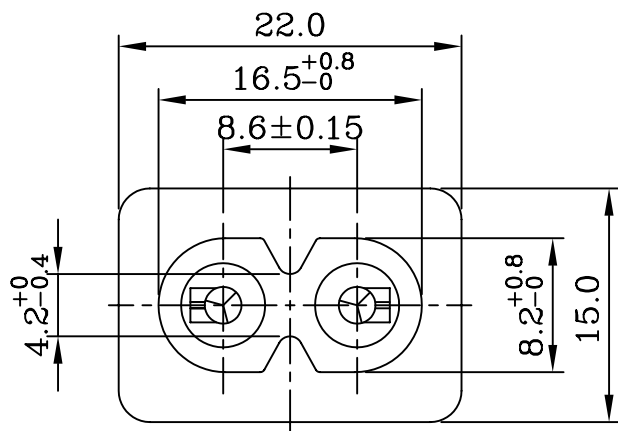

XX	
A	間隙
12	1.2
15	1.5

SPECIFICATION:

1. Insulation Resistance: Over 100MW at 500V DC.
2. Dielectric Strength: 2000V AC 1 Minute.
3. Material: Thermoplastic 94V-2~V-0.

Rating:AC 2.5A 250V	
Mark	Safety Regulation
Ⓢ	SEMKO
ⓓ	DEMKO
⚡	VDE
ⓕ	FIMKO
Ⓝ	NEMKO
⚡	CULUS
Ⓒ	CCC

DRAWING:C:DG\NEW-R\T\201A\ (01) XX

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION 23552 新北市中和區中正路799號1樓 Tel : 02-2226-8001 Fax : 02-2226-8002 http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net		UNIT	UNIT QTY	SCALE	TOLERANCE		PRODUCT NO.	SWR-201A (01) XX	REV	
		mm	1	2:1	X.XX±0.1 XX.XX±0.2 XXX.XX±0.3					
		DRAWN BY		APPROVED BY		ID NO	061030A08	INTERIM NO.		B
						DESCRIPTION		NEW NO.		