
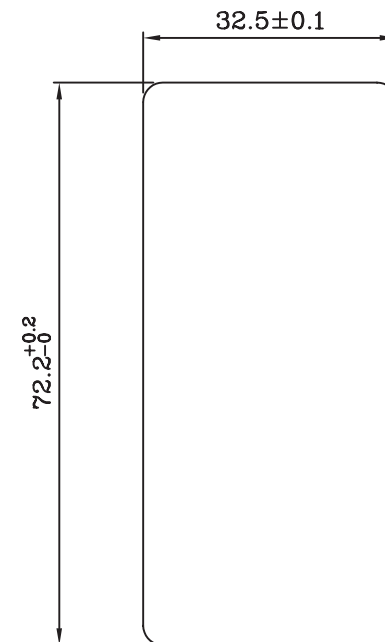
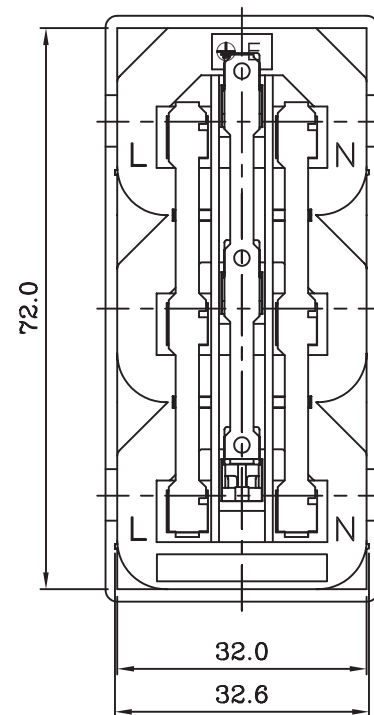
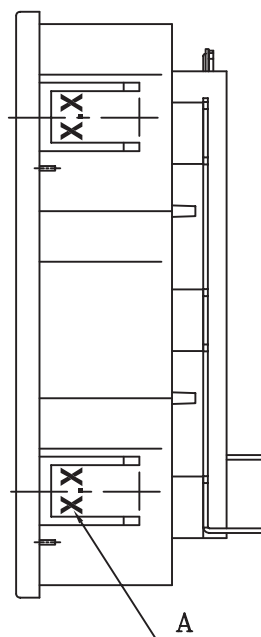
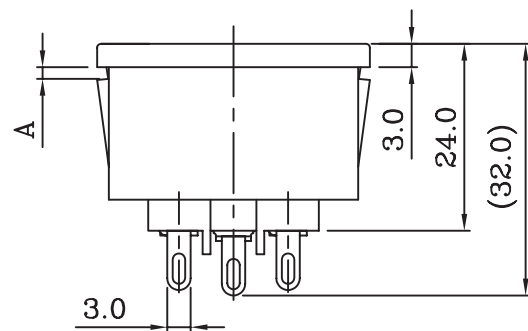


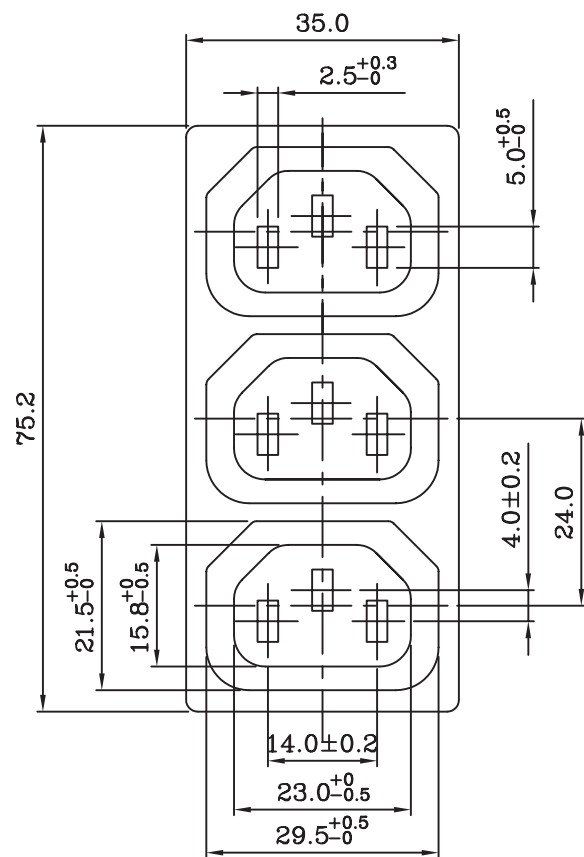

PANEL CUT-OUT

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS


XX	A
10	1.0
12	1.2
15	1.5
17	1.7
20	2.0
25	2.5

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http : //www.sweeta.com.tw E-mail : sweeta.tw@msa.hinet.net



DRAWN BY



UNIT

mm

UNIT QTY

1

SCALE

1:1

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

ID NO

100421A03

DESCRIPTION

PRODUCT NO.

SWR-302G3 (00) XX

INTERIM NO.

NEW NO.

REV

C