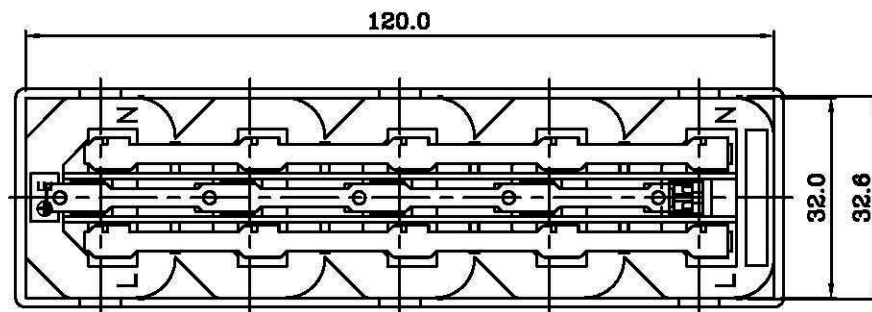




PANEL CUT-OUT

	XX	A
	10	1.0
	12	1.2
	15	1.5
	17	1.7
	20	2.0
	25	2.5

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.
4. Withdrawing force : 10N~50N.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS

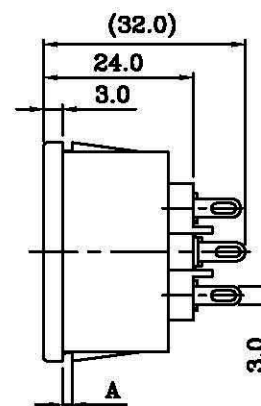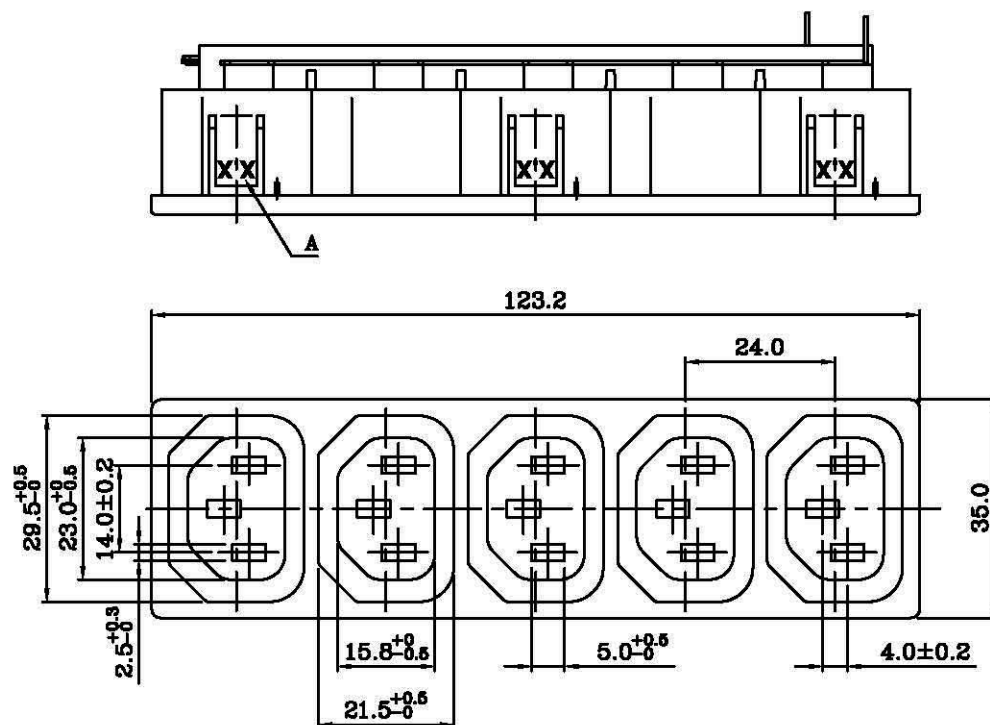


喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

23552 新北市中和區中正路799號1樓

Tel : 02-2226-8001 Fax : 02-2226-8002

http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net



DRAWN BY

UNIT

mm

UNIT Q'TY

1

SCALE

4:5

TOLERANCE

X.XX±0.1

XX.XX±0.2

XXX.XX±0.3

PRODUCT NO.

SWR-302G5(00) XX

REV

ID NO

100421A05

INTERIM NO.

NEW NO.

DESCRIPTION



APPROVED BY



C