
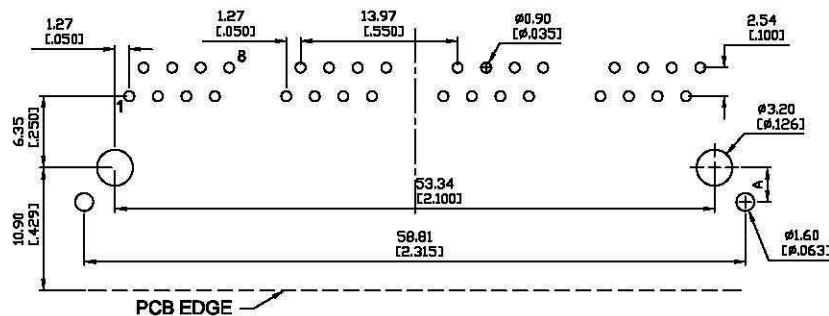
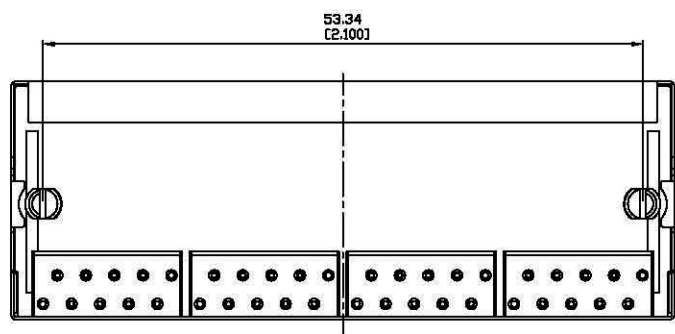
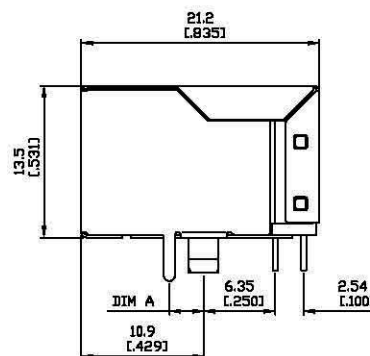


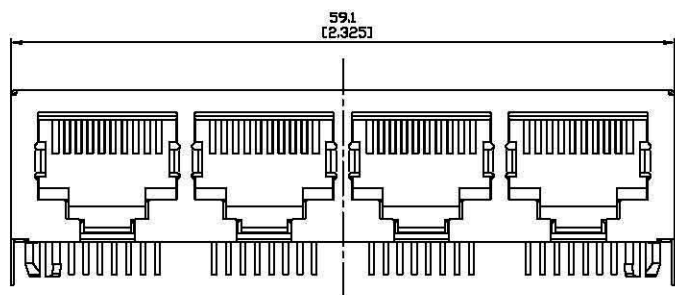

**SUGGESTED PCB LAYOUT
TOP VIEW**

Electrical Characteristics :

- Insulation Resistance : 500M Ω Min.
- Contact Resistance : 30m Ω Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0

Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel


Shield : Brass, Nickel Plating.

CUL File No : E215573

PART NO : SW-8 2 0 8 - B * 4 *

Positions
Contacts
Housing Color
B : Black

Gold Plated
0 : 3u"±1u"
1 : 6u"±1u"
2 : 15u"±5%
3 : 30u"±5%
4 : 50u"±5%



喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : SW-82(SERIES)	TITLE 圖 名	SHIELDED RJ45 SIDE ENTRY PCB JACK		UNIT 單位	mm inch
Ⓐ					TOLERANCE (公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	SW-8208-B * 4 *		SCALE 比 例	1 : 1
Ⓑ						REV. 版本	A.0	DATE 日 期	2007-01-15	
Ⓒ						CHECKED BY 審 核	Michael		DRAWN BY 製 圖	Valiant
Ⓓ										
Ⓔ										