


NOTE: 1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES: 10mm OVER - $\pm 0.20\text{mm}$.
10mm BELOW - $\pm 0.10\text{mm}$.

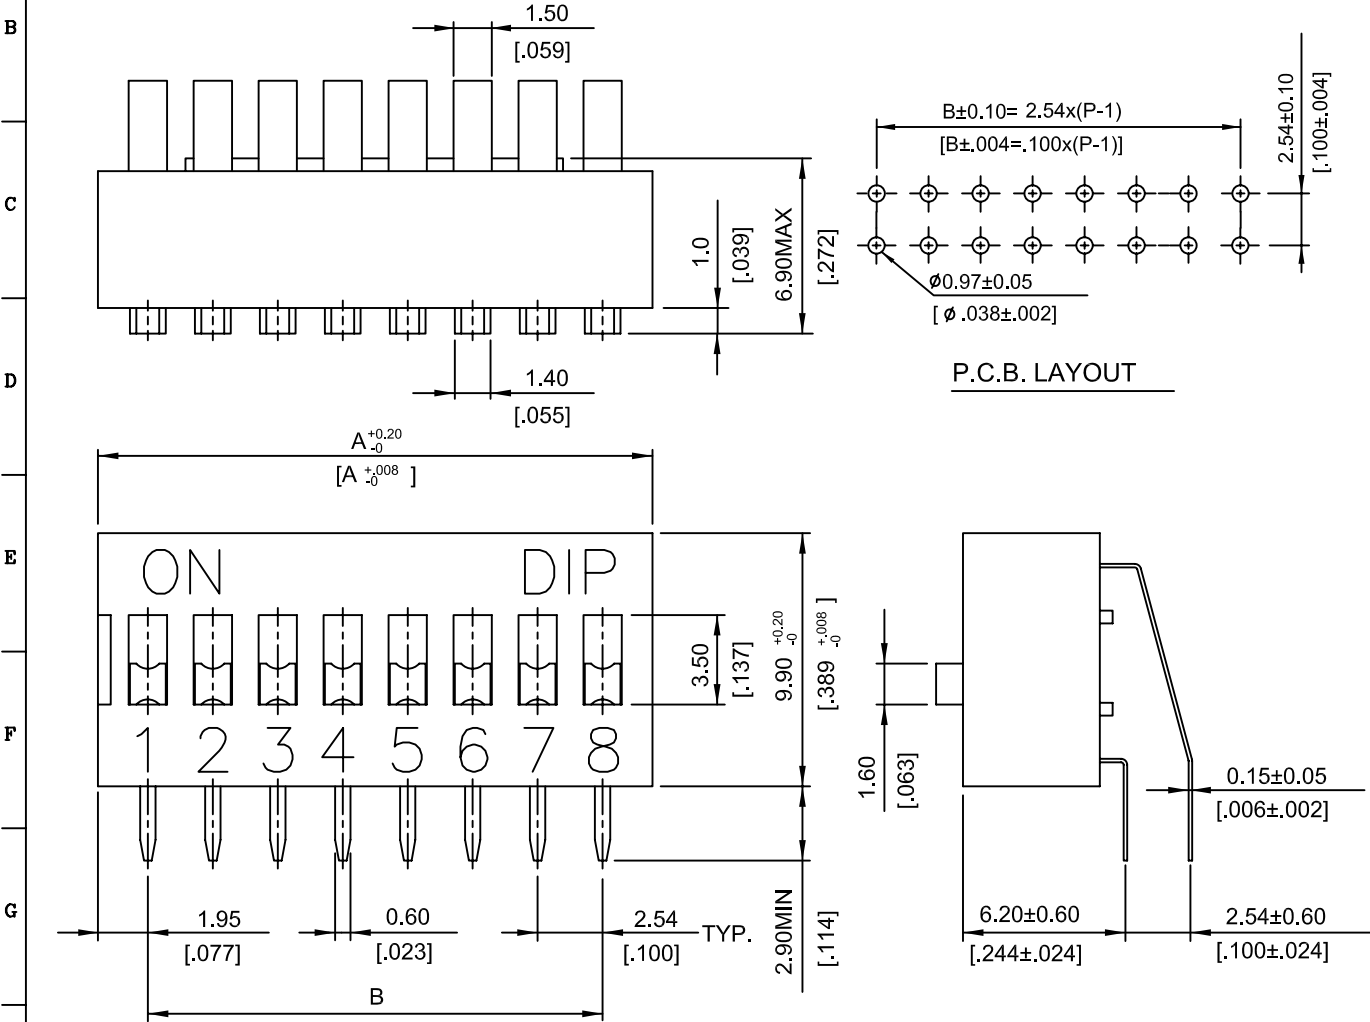

DA-12-V	12	31.84[1.254]	27.94[1.100]
SDA-10-V	10	26.76[1.054]	22.86[.900]
SDA-09-V	9	24.22[.954]	20.32[.800]
SDA-08-V	8	21.68[.854]	17.78[.700]
SDA-07-V	7	19.14[.754]	15.24[.600]
SDA-06-V	6	16.60[.654]	12.70[.500]
SDA-05-V	5	14.06[.554]	10.16[.400]
SDA-04-V	4	11.52[.454]	7.62[.300]
SDA-03-V	3	8.98[.354]	5.08[.200]
SDA-02-V	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC (TYP.)			
(2,3,4,5,6,7,8,9,10,12, POS AVAIL)			

△				
△				
△				
△	A	DWG.REL.	03-17-05	
ZONE	REV	DESCRIPTION	DATE	APPD.

APPD:	Q'TY:	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		PART NAME:	
CHKD:	SCALE: 5 : 1			RIGHT ANGLE TYPE DIP SWITCH	
DR:	REV: A	UNITS: mm	PART NO:	MATL:	DWG NO:
DESIGN:			SDA- □ □ - V	FINISH:	R D 1 P 8 A - V