



SPECIFICATION FOR APPROVAL

TO: _____



1/2

PART NAME	EMI FILTER	SAMPLE NO	FTB-3602
MODEL	SEYR03A1	SAMPEL DATE	2008-04-30
MODEL NO		OUR DRAWING NO	


1.DIMENSIONS:(mm)

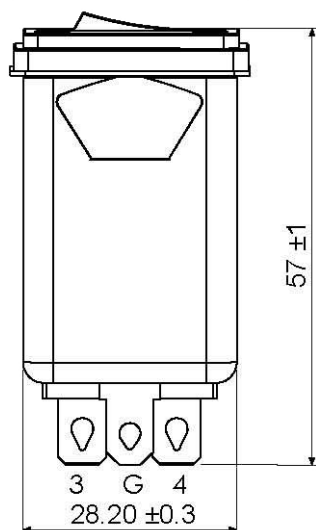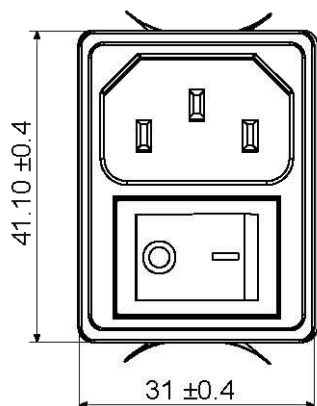

SUGGESTED CUTOUT
MOUNTING DIMENSIONS
OF SOCKET
PANEL THICKNESS:0.8~1.5mm

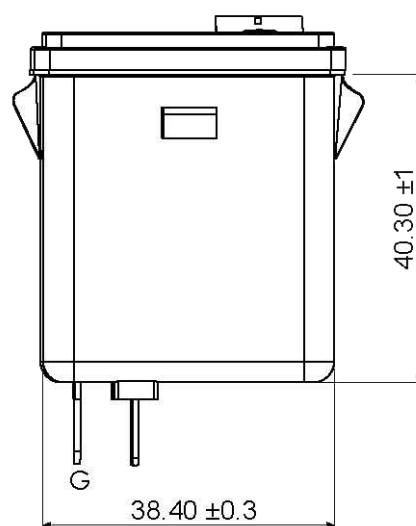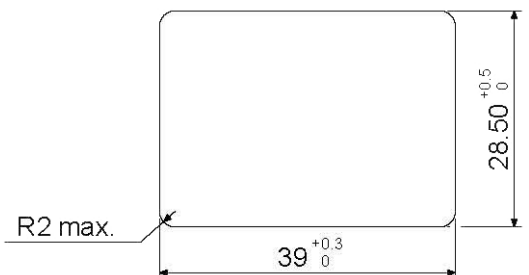

2. SCHEMATIC:

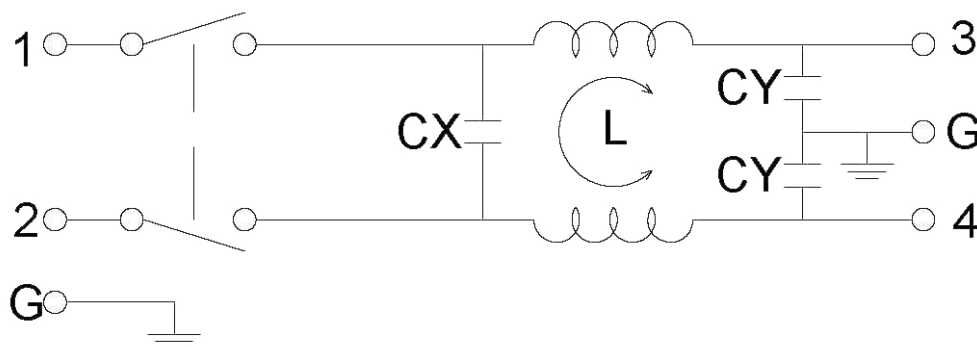

CX:0.1uF
CY:3300pF
L:1.8mH X 2

REPORTED BY	CHECKED BY	APPROVED BY	4	
陳俊佑 080430		黃協理 080430	3	
			2	
			REV. 1	

CK002 30101

SPECIFICATION FOR APPROVAL

TO: _____


2/2

PART NAME	EMI FILTER	SAMPLE NO	FTB-3602
MODEL	SEYR03A1	SAMPLE DATE	2008-04-30
MODEL NO		OUR DRAWING NO	

3.ELECTRICAL CHARACTERISTICS:

3-1.RATED VOLTAGE..... 125/250VAC
3-2.RATED CURRENT..... 3A
3-3.OPERATING FREQUENCY..... 50/60Hz
3-4.LEAK CURRENT:EACH LING TO GROUND
250VAC 50Hz..... 0.8mA MAX
3-5.HIPOT RATING:(FOR ONE MINUTE)
LINE TO LINE..... 1450VDC
LINE TO GROUND..... 1800VAC
3-6.INSULATION RESISTANCE..... 250VDC/100MOHM MIN
3-7.DIRECT CURRENT RESISTANCE..... 0.1OHM MAX
3-8.OPERATING TEMPERATURE..... -25 TO+85°C

4. SCHEMATIC:

REPORTED BY	CHECKED BY	APPROVED BY	4	
陳俊佑 080430		黃協理 080430	3	
			2	
			REV. 1	

CK002 30101