


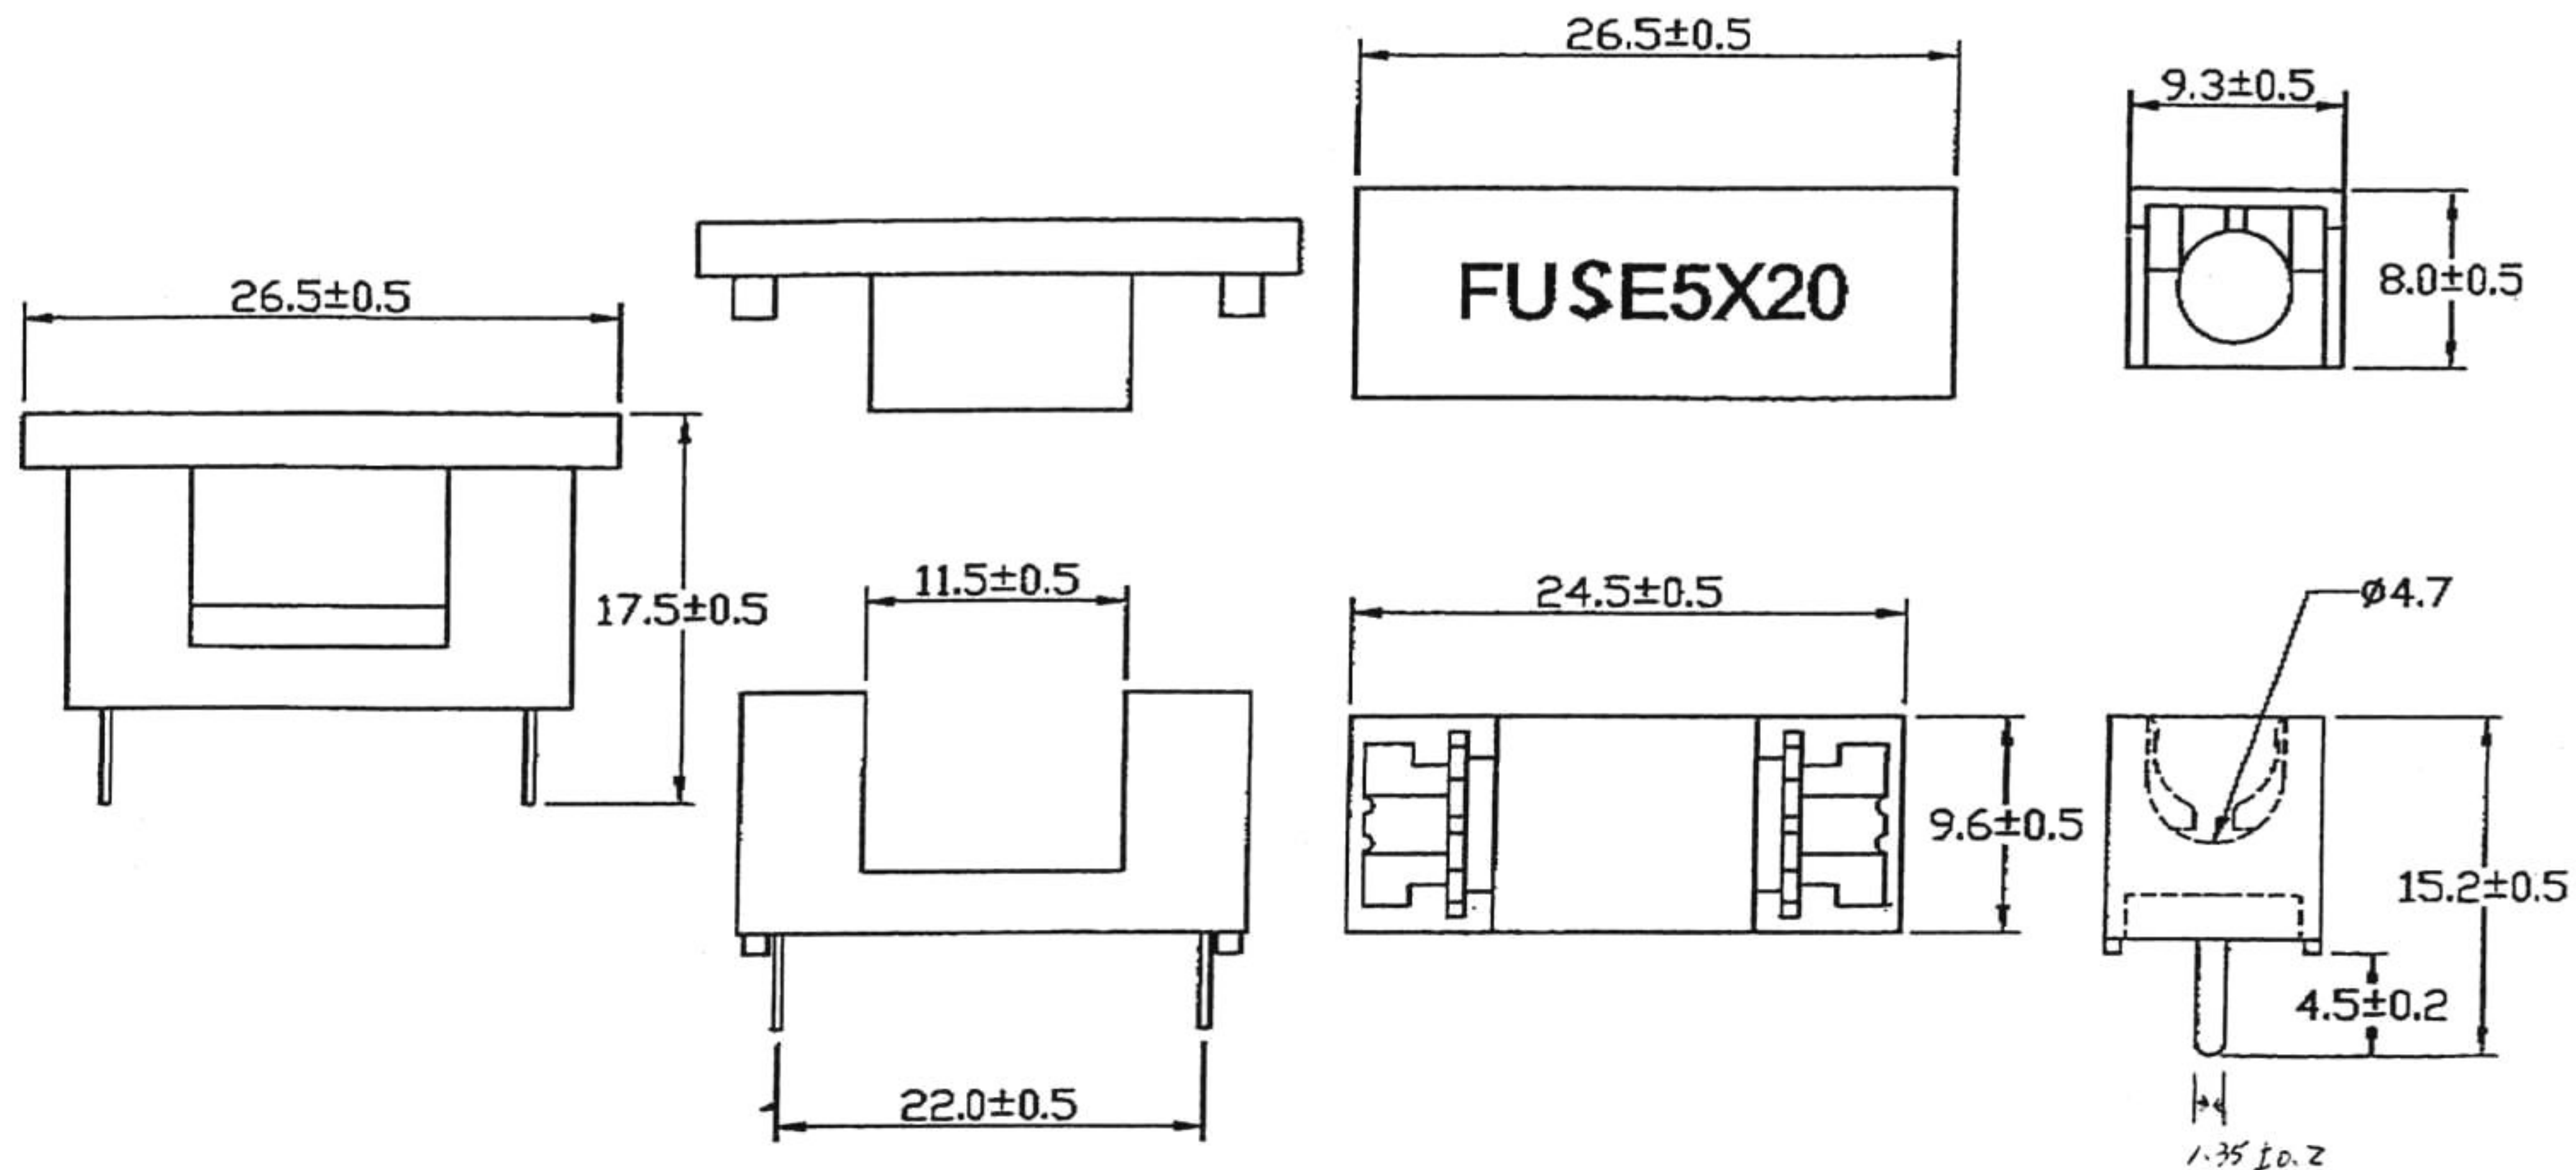

SPECIFICATION :

- A. Insertion & Extraction Force : 1Kg. Min.
- B. Dielectric Strength For 60 Seconds : AC 500V Min.
- C. Suitable Rated Current : 10A 250V Max.
- D. Insulation Resistance At 500V DC : 100M Ω Min.
- E. Temperature Rise : 50 $^{\circ}$ C Max.
- F. Voltage Drop : 20mV Max.
- G. Soldering heat : 250 $^{\circ}$ C/5sec Max.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALES ANGULAR ± 0.5 $\pm 1^{\circ}$ DO NOT SCALE DRAWING	CONTRACT NO.	SWEETA PRODUCTS CORPORATION
	DRAWN BY MAYFN	TITLE
	CHECKED BY [Signature]	FUSE BLOCK
	DESIGNED BY Cheng	PART NO. SFH-506C (SFB-506C)
MATERIAL	DATE: 08/07/01	DRAWING NO.
TREATMENT	SCALE	