
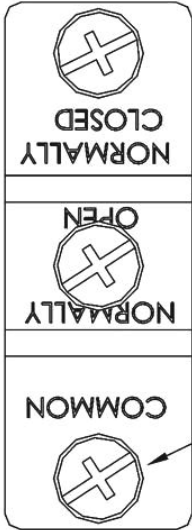


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
Contact resistance	15mΩ max. (initial)	Terminal	SCREW
Insulation resistance	100MΩ min. (at 500 VDC)	Item No.	Z15G1306
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	OF max.	250~350gf
Mechanically service life	1,000,000 operations min.	PT min.	114gf
Electrically service life	100,000 operations min.	OT min.	0.4mm
		MD max.	1.6mm
		OP	0.05mm
			21.5±0.5mm

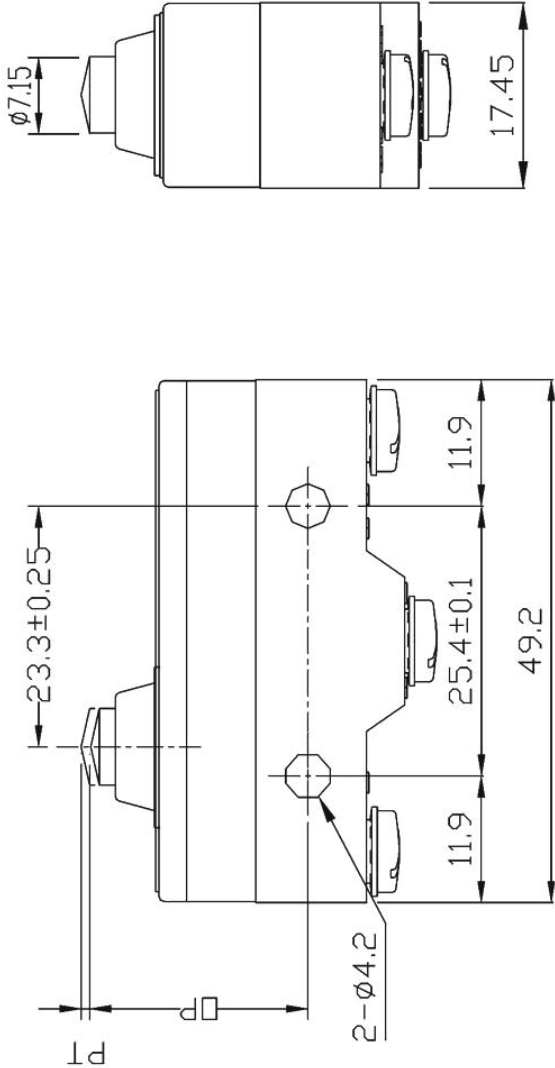

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000°±0.25°	0.000±0.005	DRAWN	DATE
0.007°±0.5°	0.00±0.10	Ar-thur	2003/03/18
0.0°±1°	0.0±0.20	CHECKED	DATE
0°±2°	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	2.5: 1
TOLERANCE			

TITLE:		S215G1306 CHARACTERISTICS	
FINISH			
MATERIAL:			
DWG NO.		A3	

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

B	I. the screw change from cap washer to toothed lock washer	ART-HUR	2003/03/18
A	FIRST ISSUE	Ar-thur	2002/4/24
ISS	NOTE	DESCRIPTION	GRID
		DRW	APP
			DATE