
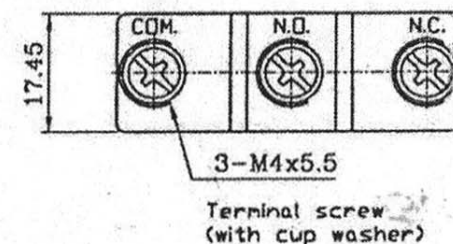
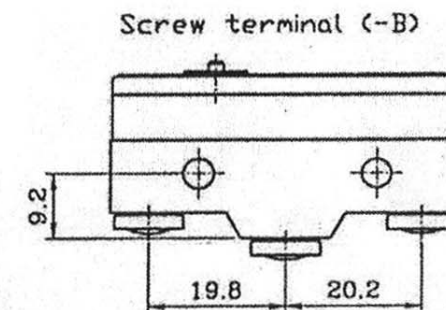
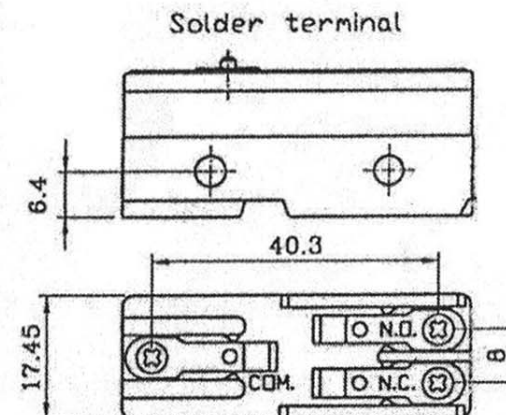
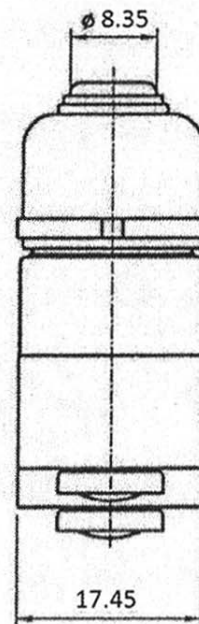


CHARACTERISTICS		Rating	20(12)A 125VAC OR 250VAC
		Terminal	
Contact resistance	15mΩ max. (initial)	Item No.	ZP15G1306
Insulation resistance	100MΩ min. (at 500 VDC)	OF	540g Max
Dielectric strength	1,000 VAC, 50/60Hz for 1 minute between	RF min.	114g
		PT max.	2.3 mm
		OT min.	1.6 mm
		MD max.	0.06 mm
Mechanically service life	1,000,000 operations min.	OP	28.2 ± 0.5 mm
Electrically service life	100,000 operations min.		

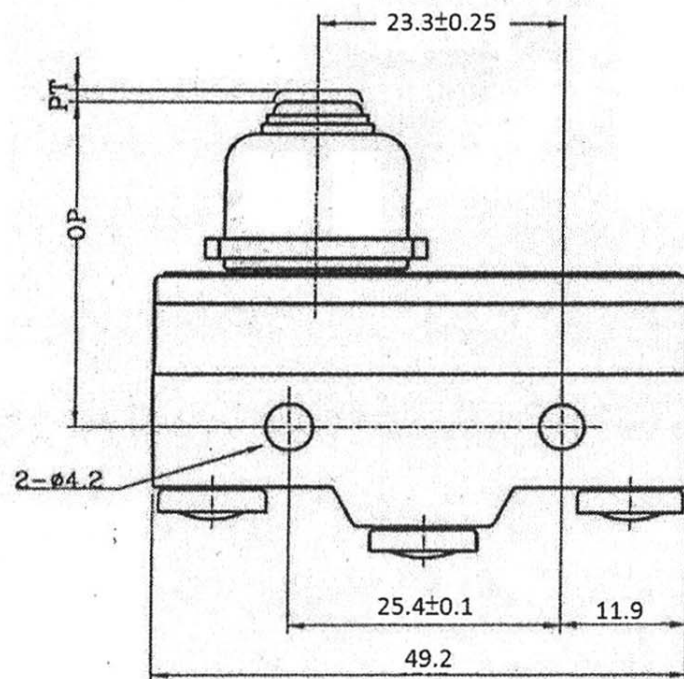

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

審核 CHECKED / DATE

TOWY 2010/01/25

繪圖 DRAWN / DATE

Richard 2010/01/25

材質 MATERIAL

加工 PROCESS

單位 UNIT

m/m

比例 SCALE

1.5:1

版本 EDITION

C

公差 TOLERANCE

±0.15

料號

TYPE NO

檔名

FILE NO

SZP15G1306H

01112070