

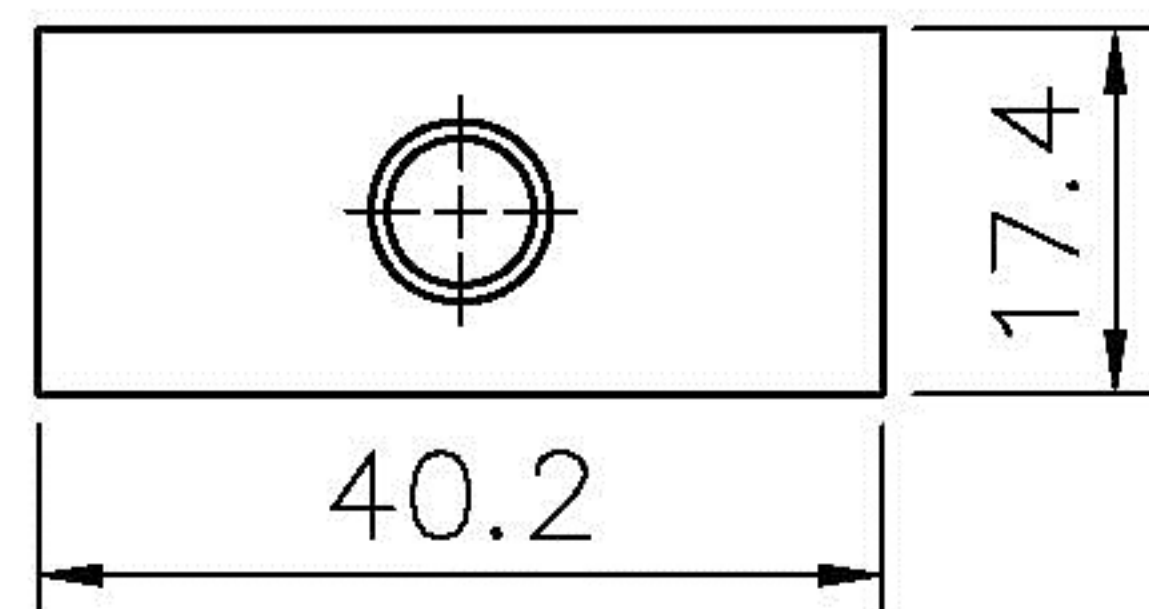


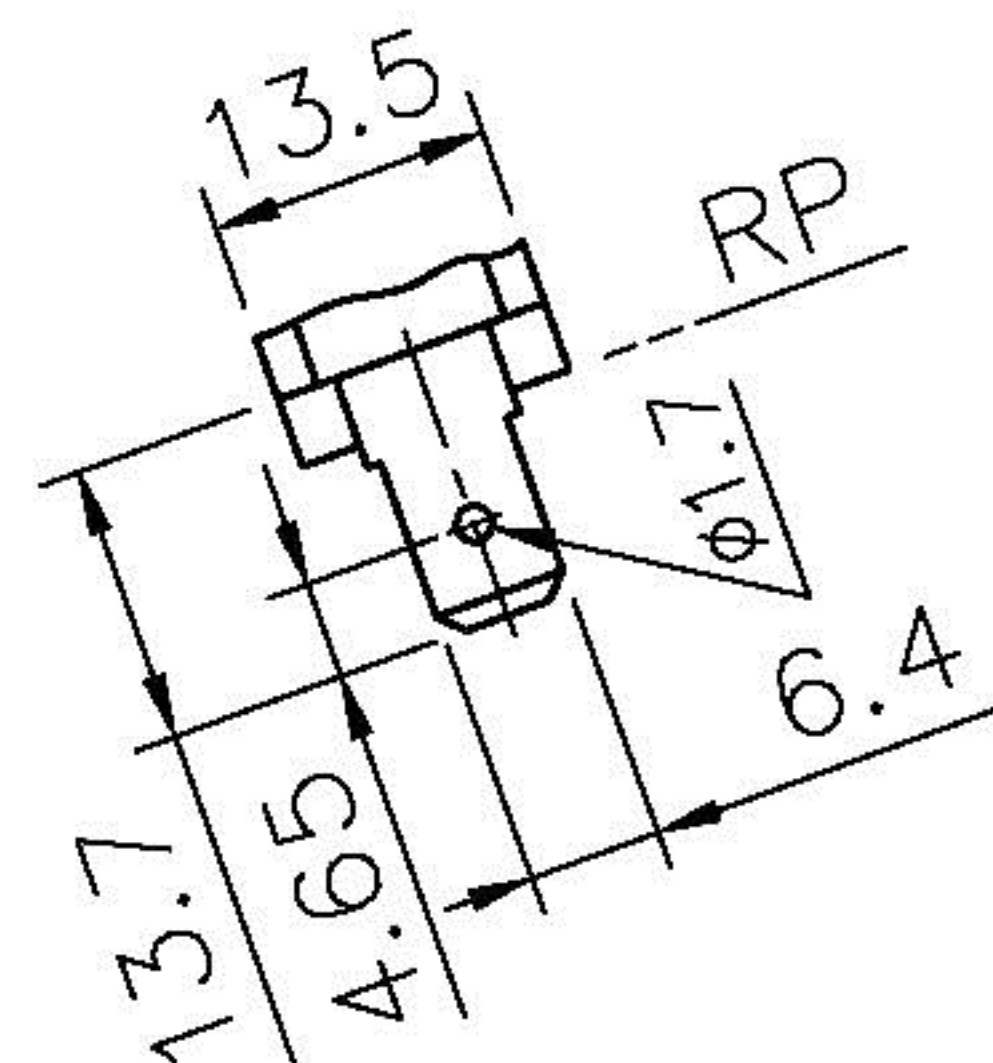



SPECIFICATION

1. Rating : AC 125V 3A
2. Contact R. : 20m Ω Max.
3. Insulation R. : DC 500V 100M Ω Min.
4. Dielectric Strength : AC 1500V 1 minute.
5. Operating Temperature : -20 $^{\circ}$ C ~ +65 $^{\circ}$ C
6. Electrical Life : 20,000 make-and-break cycles at full load.

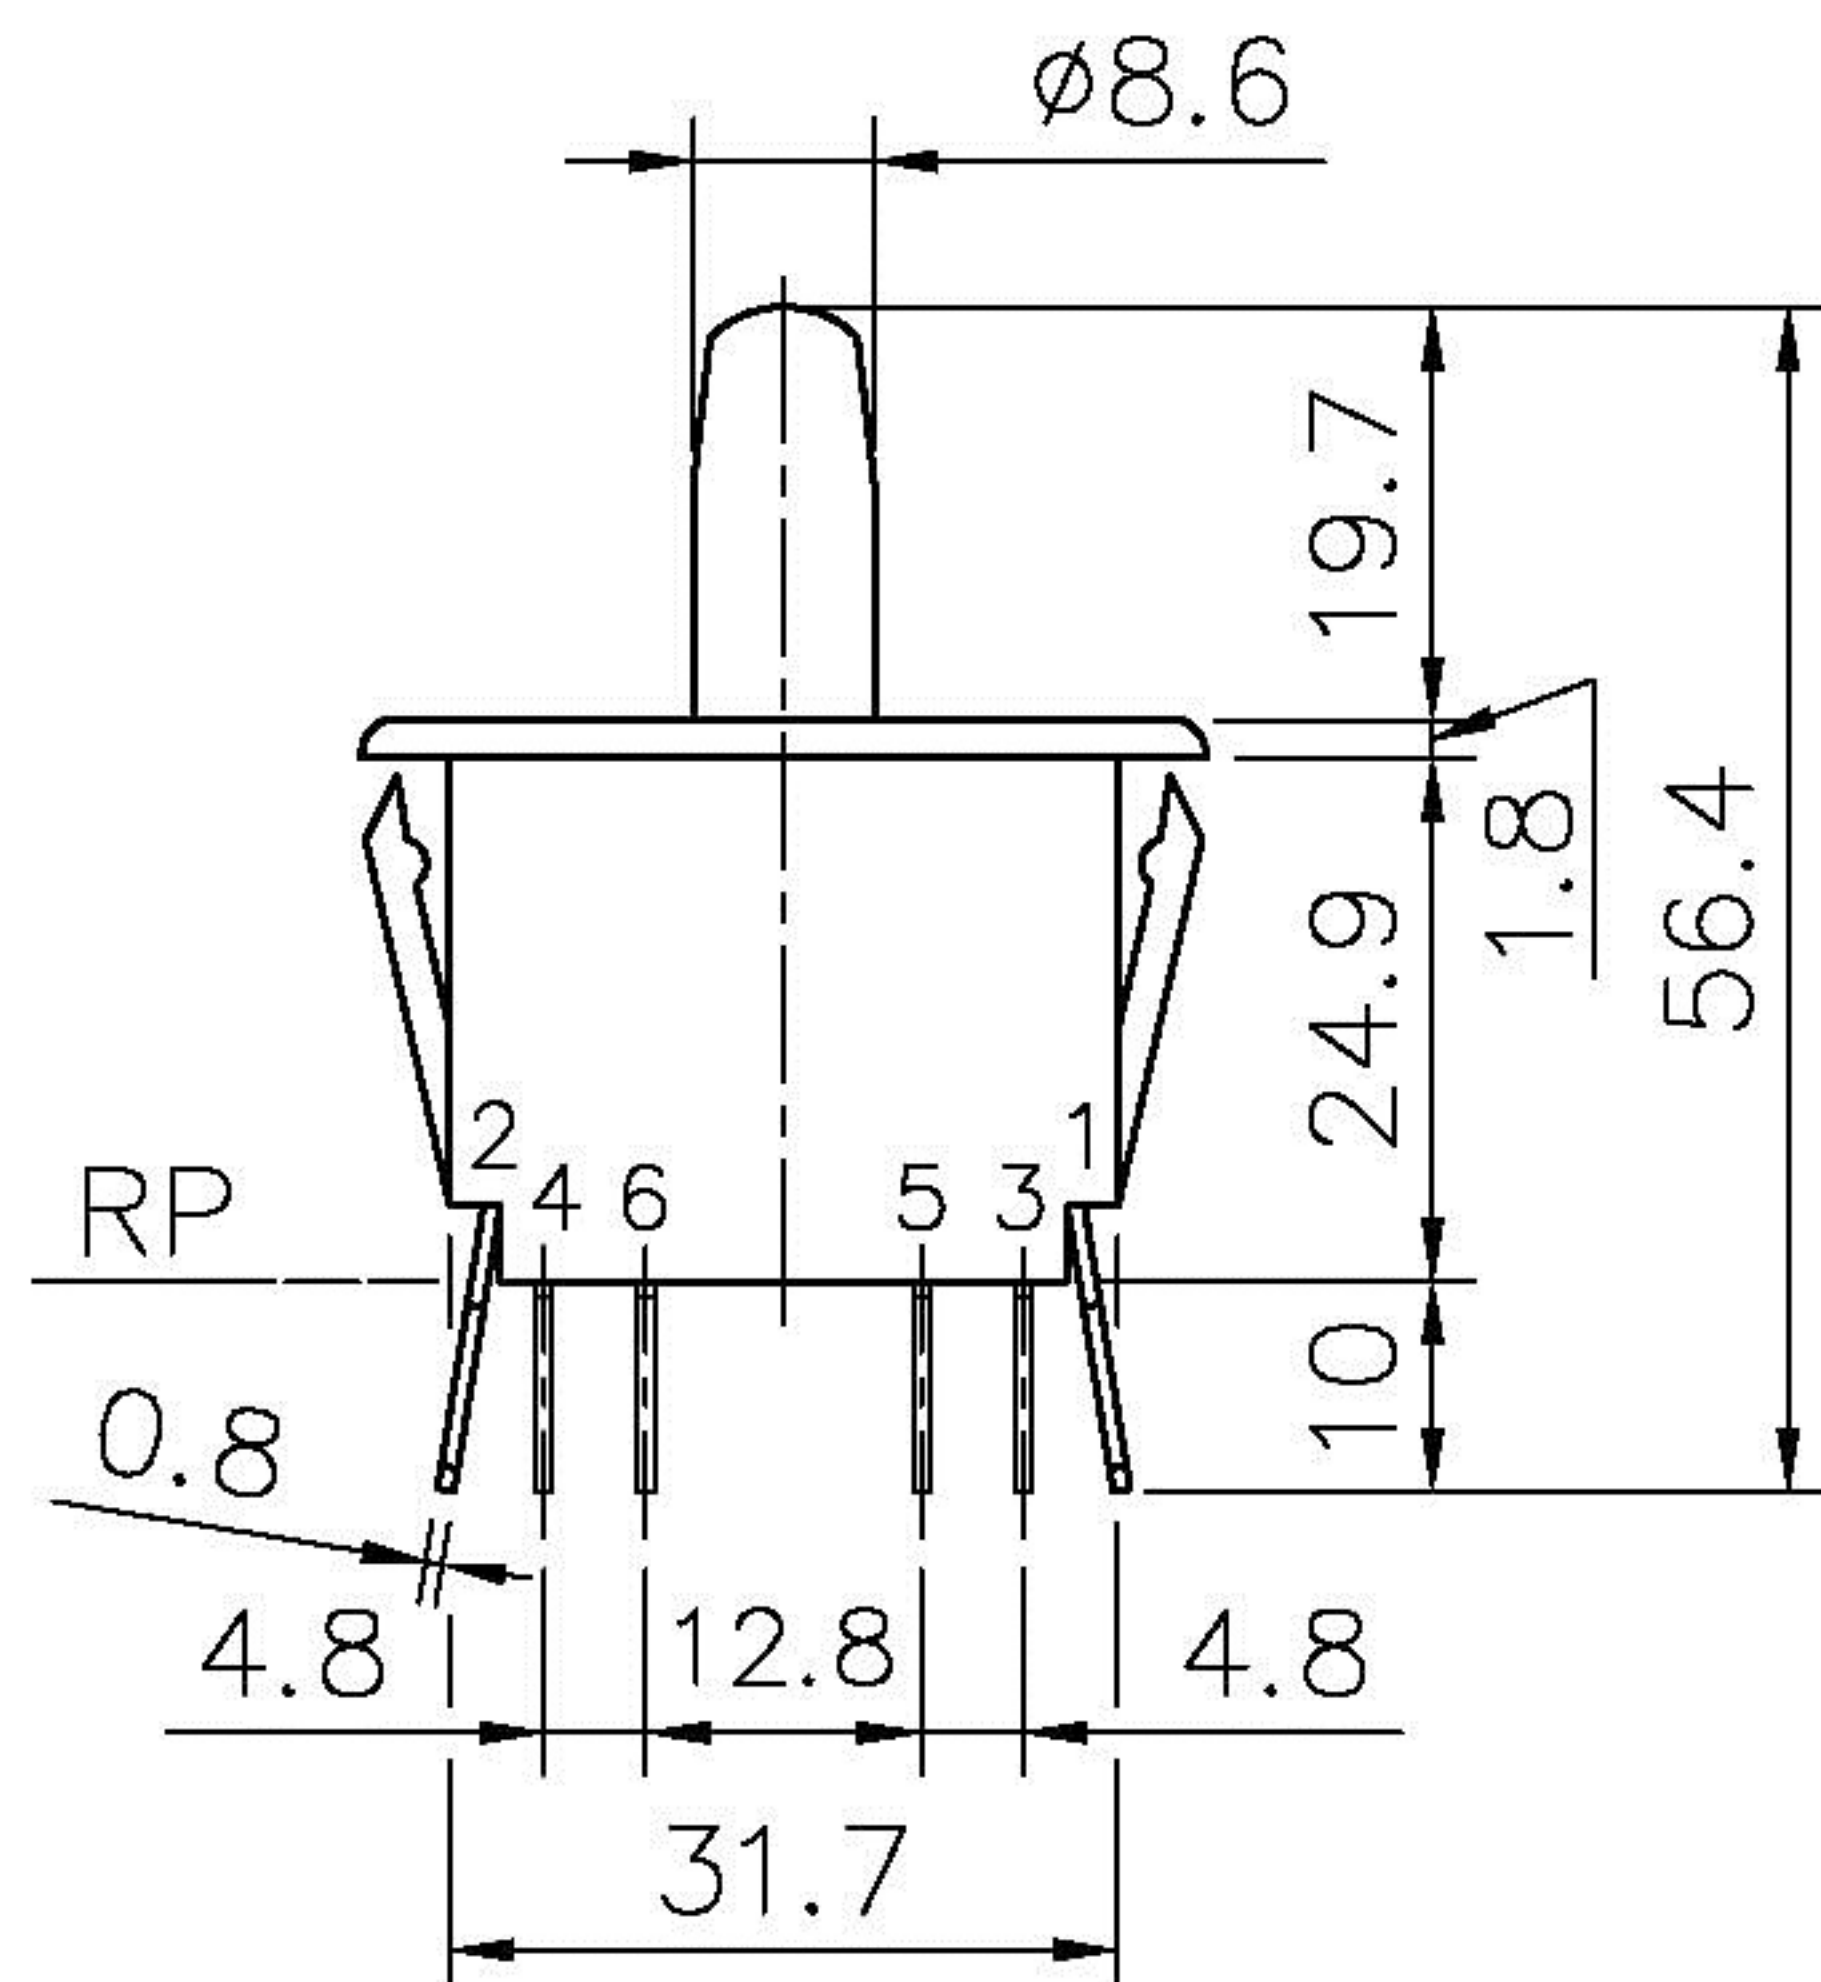

PIN 1: COM2, PIN 3: NC2, PIN 5: NO2
PIN 2: COM1, PIN 4: NC1, PIN 6: NO1

 : PIN 1-3, 2-4 ON , PIN 1-5, 2-6 OFF

 : PIN 1-5, 2-6 ON , PIN 1-3, 2-4 OFF

品號	SPB-4065	件號		圖號	
品名	PUSH-BUTTON SW.	零件		單位	m/m
材質		處理		比例	1:1
修改日期	說明事項	版次	0	審核	設計
		製圖	KEVIN	日期	SEP.18.2001
				公差	±0.2

RD-05-001-A1-0