
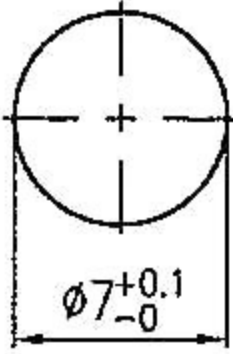
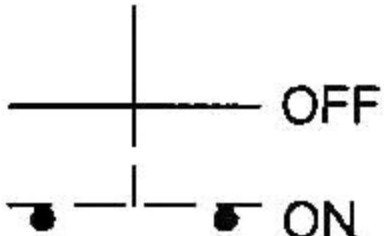
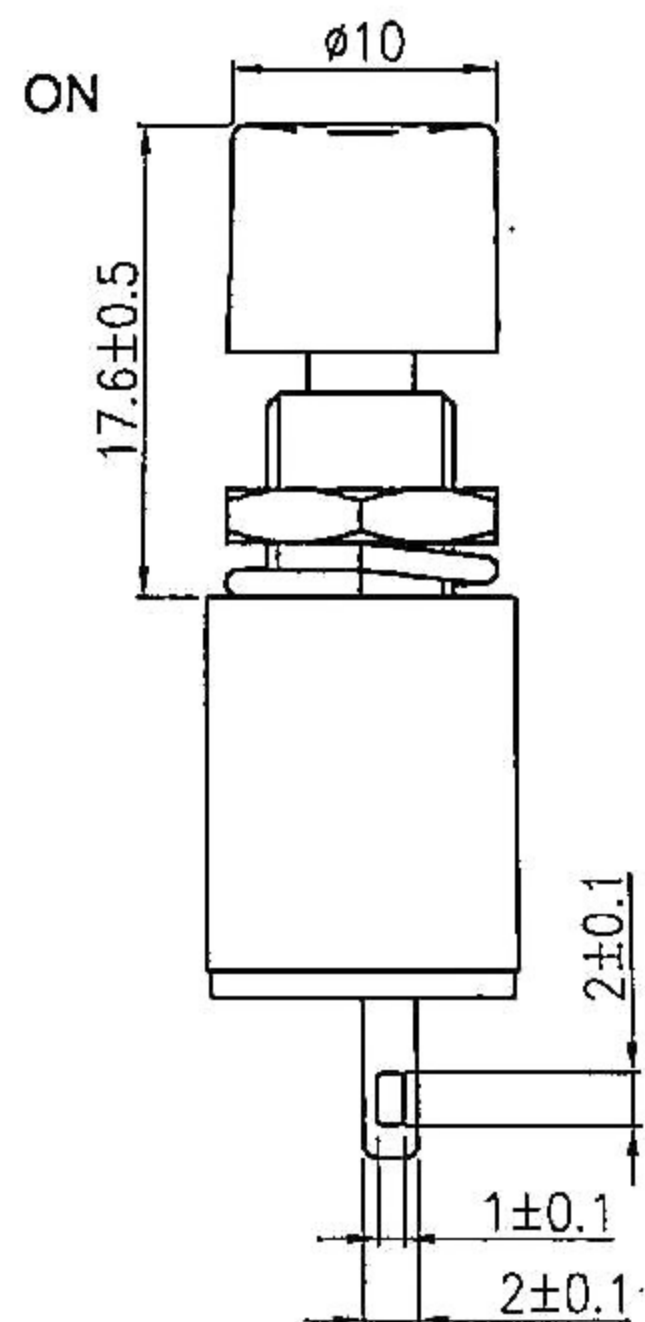


Rating	3A 125V AC, 1.5A 250V AC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	2P SPST OFF-ON		

Material:
Frame: Black, Nylon 66
Actuator: Red, ABS
Terminals: Silver Plated Brass

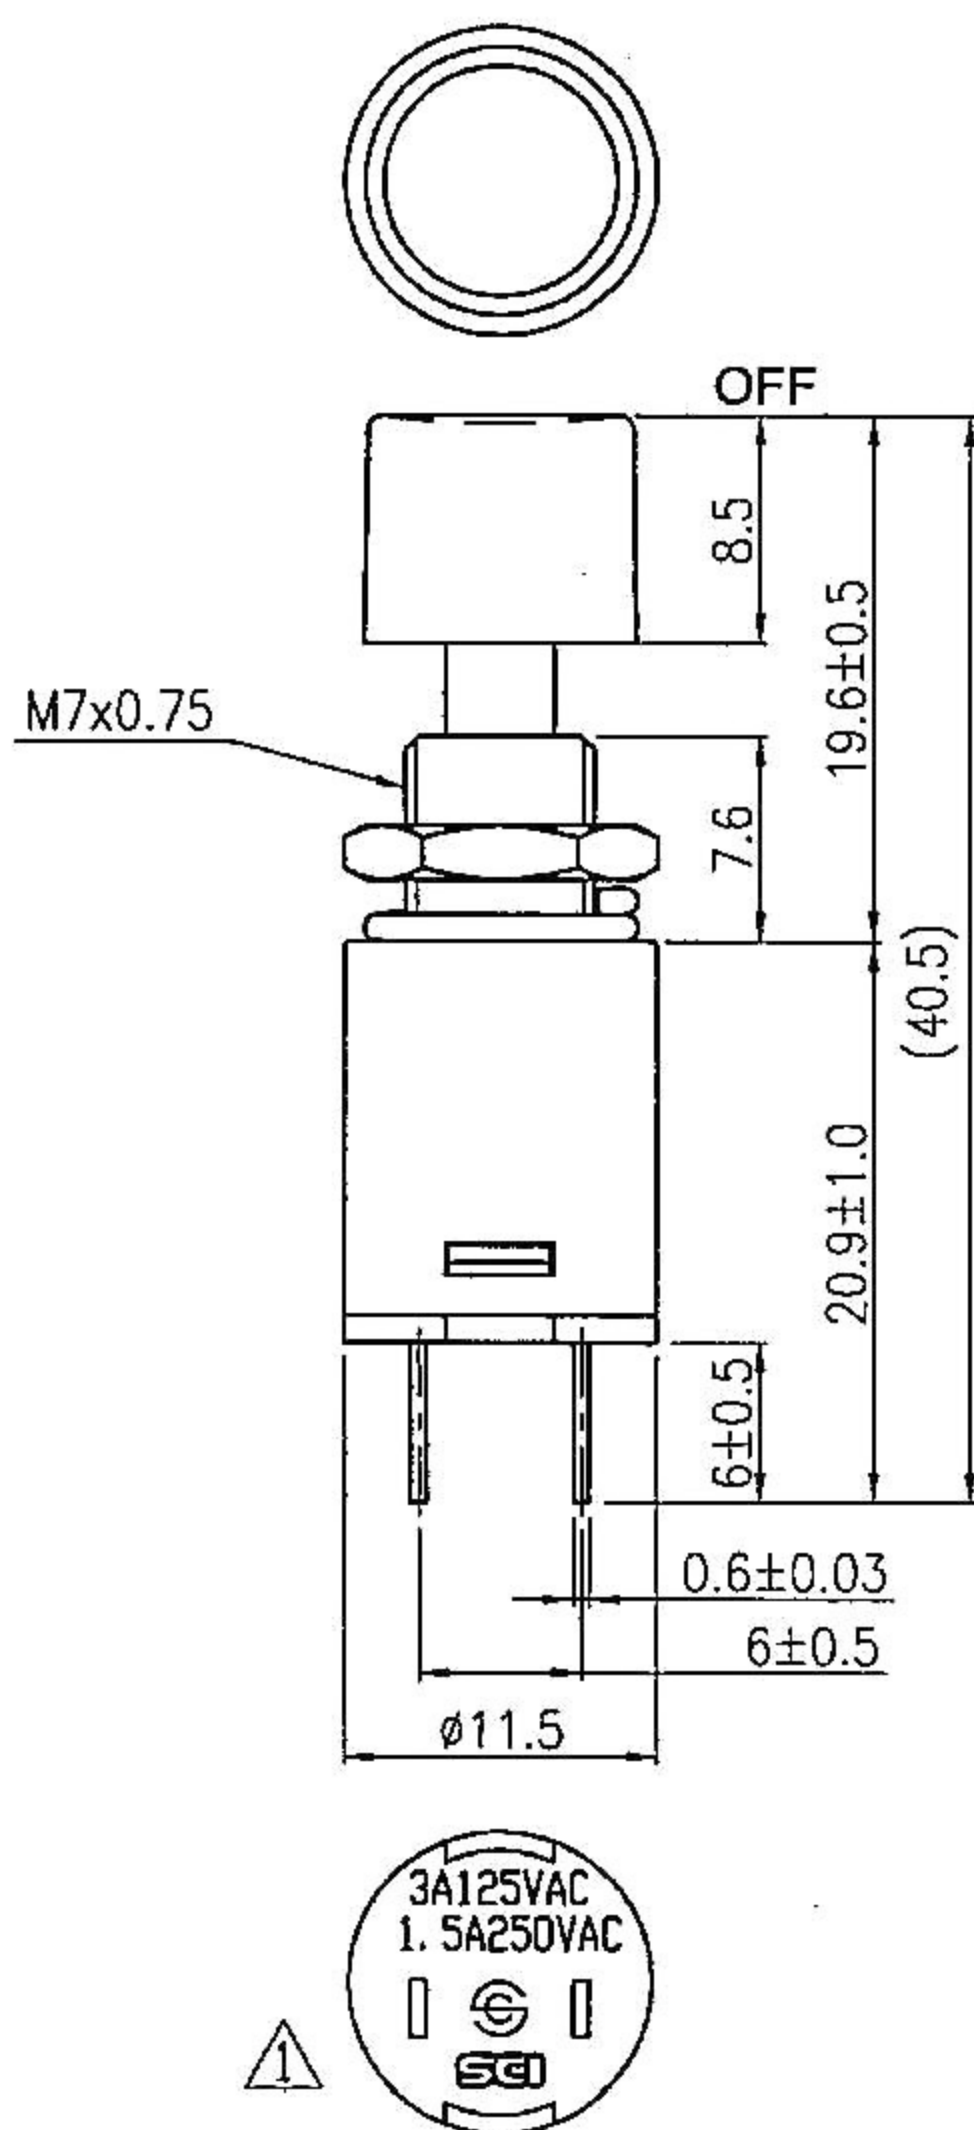

Tolerances Unless Otherwise Specified ± 0.3

						△	
10/08/12	柳新強	增加SCI LOGO				△	
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No.	1830244	Model Name	PUSH SWITCH	
柳新強	符子強	Simon	Customer No.	SPR13-512B2-05	Model No.	SPR13-512B2KRES	Rev.
10/08/12	10/8/12	10/8-12	Unit	mm	SWEETA PRODUCTS CORPORATION		1