


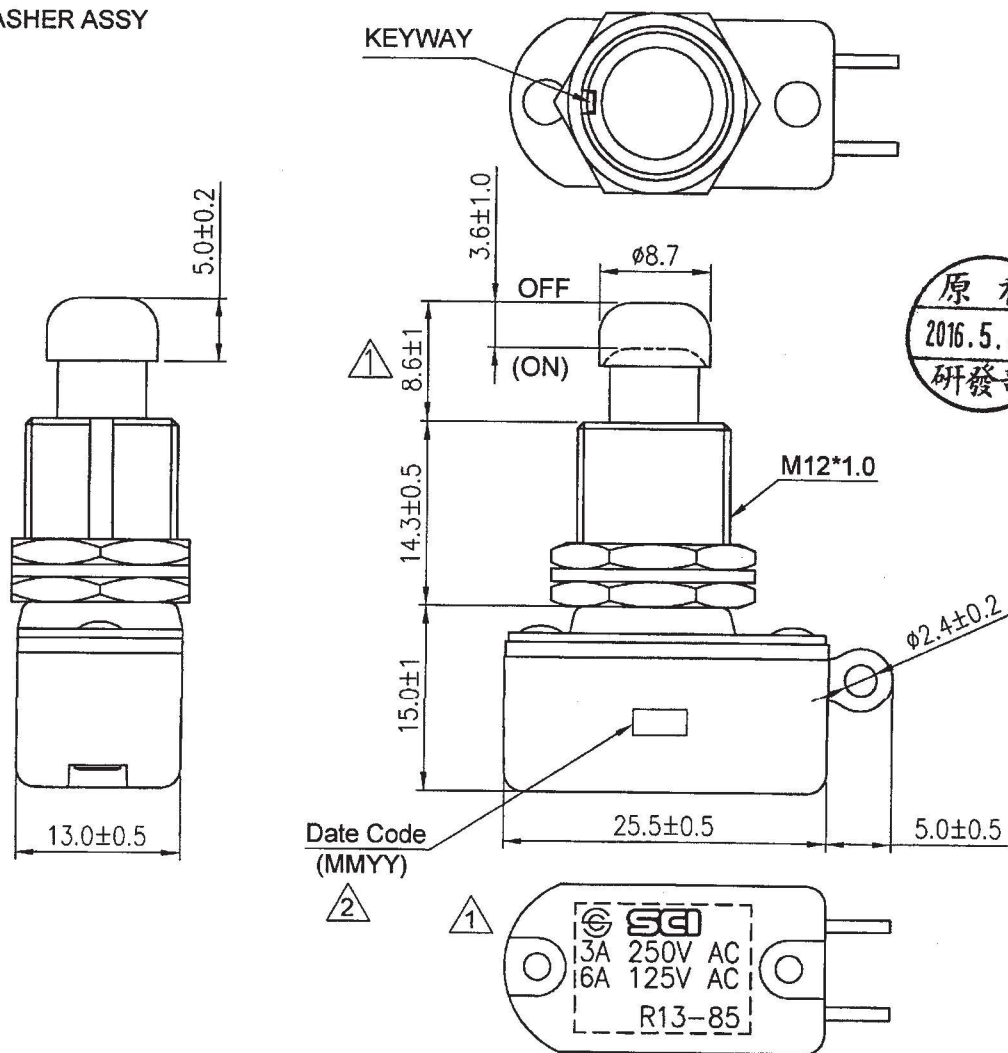



Rating	6A 125VAC, 3A 250VAC	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Operation Temperature	-20°C~65°C		
Switch Function	2P SPST OFF-(ON)		

2 HEX NUT ASSY
1 SPRING WASHER ASSY



Tolerances ± 0.3 Unless Otherwise Specified

05/17/16	何坤	依裝配要求，統一Date Code為MMYY，并更新圖面。			△	
08/06/14	黃洋	修正尺寸9.4=>8.6±1,增加SCI LOGO,更新圖面。			△	
Date	Name	Description			No.	
Drawn	Checked	Approved	SCI BOM No.	1830129	Model Name	PUSH SWITCH
何坤			Customer No.		Model No.	SPR13-85A1-05-HWH
05/17/16	5/18-16	5/18-16	Unit	mm	SWEETA PRODUCTS CORPORATION	
						Rev. 2