



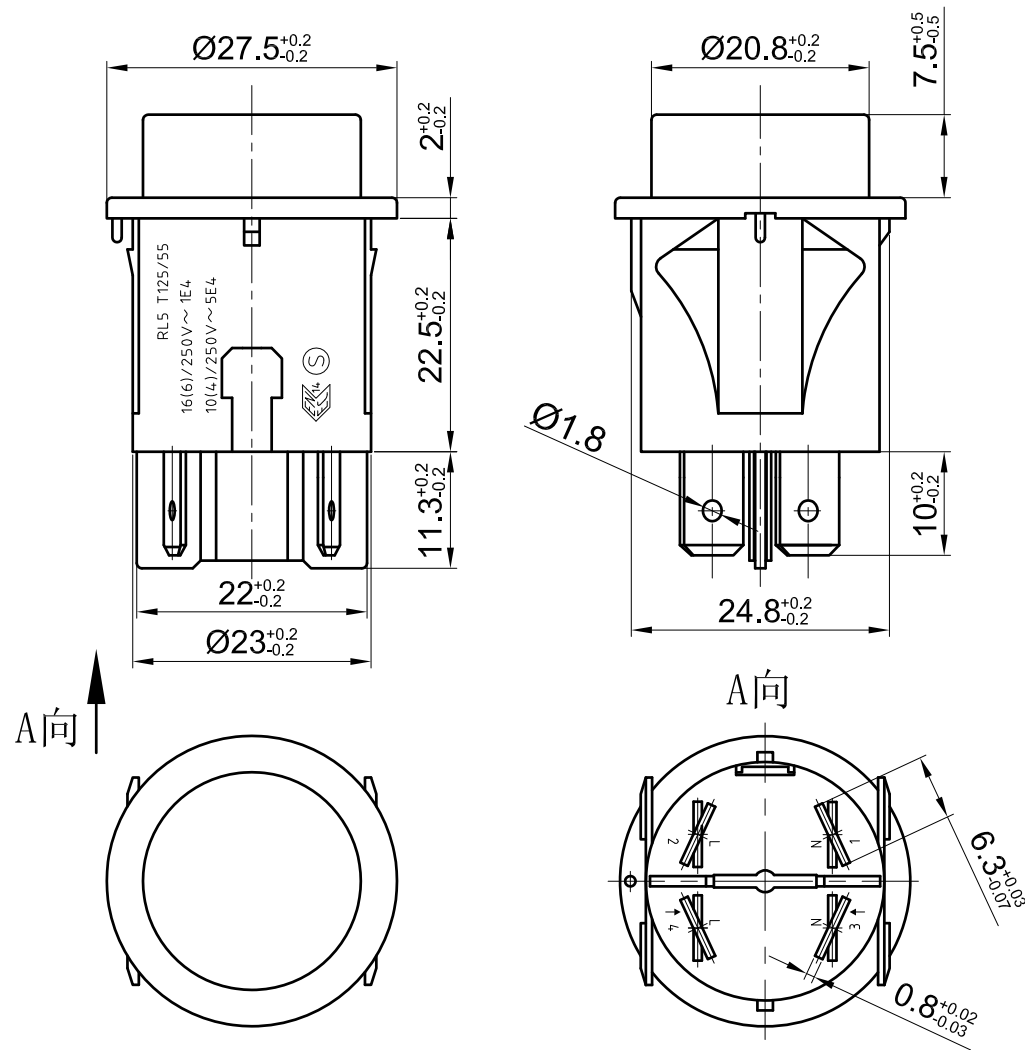

## SPECIFICATION

- RATING:UL C-UL:16 125VAC T105  
1/2HP 125VAC 3/4HP 250VAC  
ENEC SEMKO:  
16(6)/250VAC 1E4 T125/55  
10(4)/250VAC 5E4
- NEON LAMP:AC110V
- CIRCUIT:ON-OFF W/Lamp DPST 4P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:1000~1500gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

## PANEL HOLE SIZE

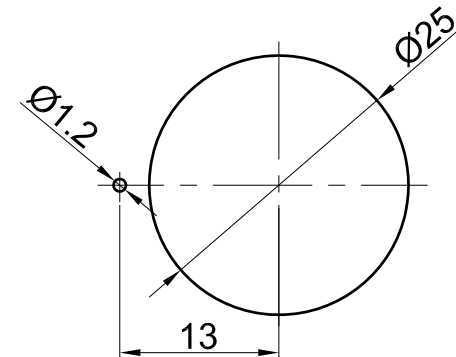

## MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:PC UL 94HB
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10)/Cu

|                                            |     |          |     |    |     |                            |                           |
|--------------------------------------------|-----|----------|-----|----|-----|----------------------------|---------------------------|
| 喜威達企業股份有限公司<br>SWEETA PRODUCTS CORPORATION |     |          |     |    |     | SPRL5-121/N-GR/BK-P1-0-(1) |                           |
| 设计                                         | 签名  | 年月日      | 标准化 | 签名 | 年月日 | PUSH SWITCH                | SERIES<br>SPRL5           |
| 绘图                                         | 符辉  | 15.03.13 |     |    |     |                            | FUNCTION<br>ON-OFF W/Lamp |
| 审核                                         | 张雪飞 |          |     |    |     | VIEWS TYPE<br>             | DRAWING NUMBER            |
| 工艺                                         |     |          | 批准  |    |     |                            |                           |