


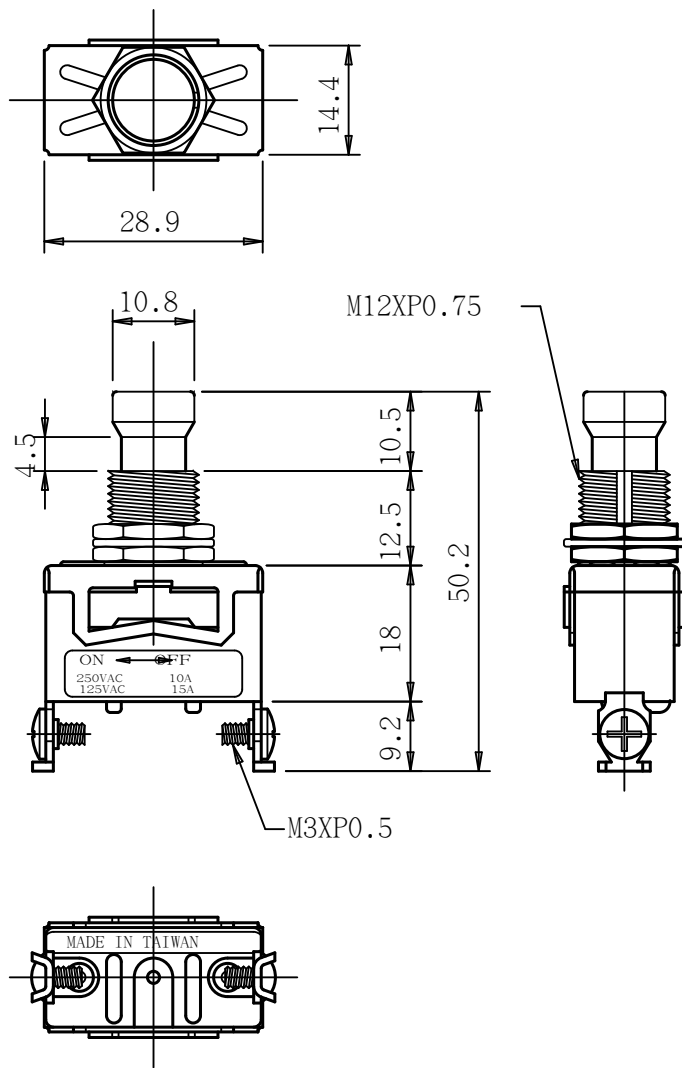

NO. POLES	MODEL NO.	SWITCH FUNCTION			TERMINAL QUANTITY	CONNETED TERMINALS		
		POS.1	POS.1	POS.1		POS.1	POS.1	POS.1
			—				—	
SPST	PU703	ON	—	OFF	2P	1-3	—	—
SPST	PU703A	(ON)	—	OFF	2P	1-3	—	—
SPST	PU703B	ON	—	(OFF)	2P	1-3	—	—

MOM=MOMENTARY

SPECIFICATION

- 1.PATING:10A 250VAC,15A 125VAC
- 2.INSULATION RESISTANCE:DC 500V 200MΩOR MORE
- 3.CONTACT RESISTANCE:DC 2-4V 1A 20MΩOR LESS
- 4.WITHSTAND VOLTAGE:AC 1500V OR MORE

端子種類尺寸 Termination Options

H1	H2	H3	H4	H5

產品
PRODUCT

PUSH SWITCH

比例
SCALE

1 : 1

單位
UNIT

MM

公差
TOLERANCE

±0.3MM

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION