
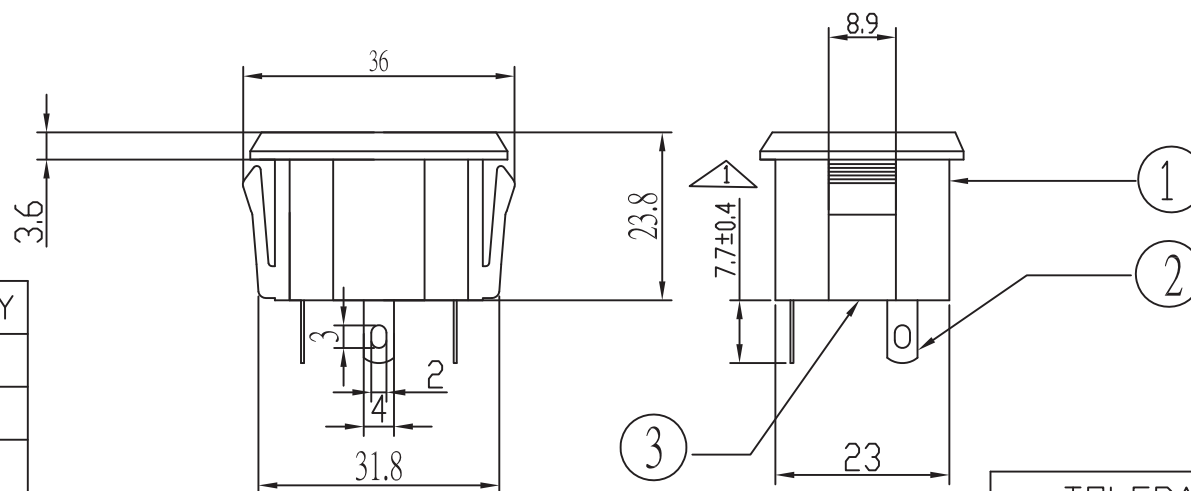

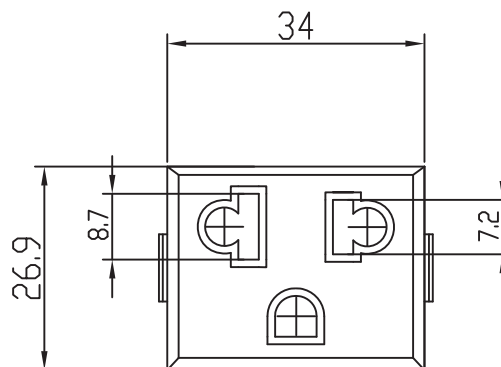


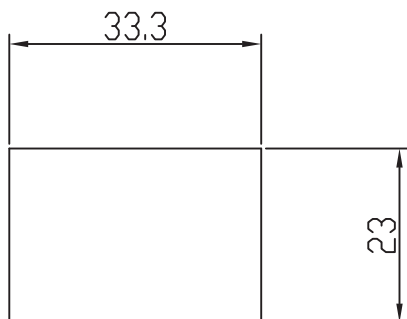

NO	DESCRIPTION	MATERIAL	QTY
1	BODY	PBT3015+GF 15%	1
2	CONTACT	BRONZE, NICKEL	3
3	GROUND	PA66+GF15%, ZYTEL 70G13L NC010	1

RATING: 125V 10A, 250V 6A
 INSULATION RESISTANCE: DC 500V 100M MIN
 DIELECTRIC STRENGTH: AC 1500V 1 MINUTE

TOLERANCES
0.5MM-5MM=±0.2MM
5MM-30MM=±0.4MM
30MM-120MM=±0.6MM
120MM-315MM=±1.0MM
315MM-1000MM=±1.6MM
1000MM-2000MM=±2.4MM

修正日期	修正說明	核准日期 Date	設計 Designed By	比例尺 Scale	單位 UNIT	REF.NO.
105.1.28	腳PIN尺寸圖面更正及模具修改來固定接蒂pin	15 JAN 2016	C.J HUANG	1:1	喜威達企業股份有限公司	SPB-204
		核准 Approved By	繪圖 Drew By		SWEETA PRODUCTS CORPORATION	3P SOCKET
		J.F. WANG	C.T WANG	m/m		6A 250VAC