
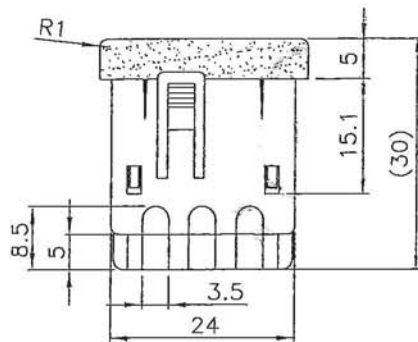
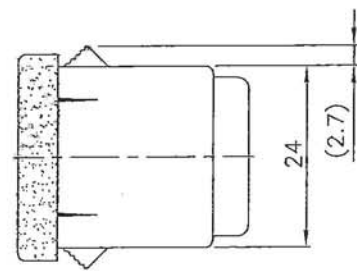
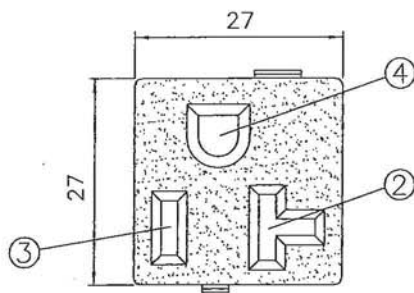


SWRF-6003

SCALE : 1:1

UNIT : mm

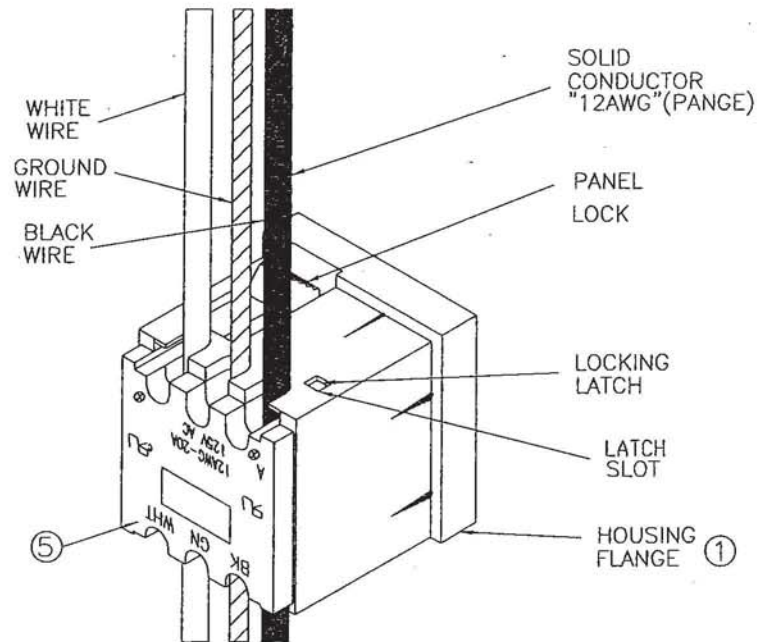


Standard:UL498 5-20R

Rating:20A 125V AC

Approvals:UL/cUL

NOTE:THIS ILLUSTRATION PERTAINS TO SOLID WIRE APPLICATIONS ONLY

Part No.	Color
SWRF-6003	黑色
SWRF-6003-A1	象牙白
SWRF-6003-A2	電腦黃(467C)
SWRF-6003-A7	電腦土黃(453C)
SWRF-6003-A8	黃(221077)
SWRF-6003-A10	鐵灰(430U)
SWRF-6003-A11	潔白
SWRF-6003-A12	灰(429C)
SWRF-6003-A13	含美TL灰色
SWRF-6003-A14	Cool Gray9C
SWRF-6003-A15	Cool Gray4C
SWRF-6003-A16	Ivory-White(RRF-6001-B5)
SWRF-6003-A17	7535C
① SWRF-6003-A18	Gray(423C)
② SWRF-6003-A19	Gray(432C)
③ SWRF-6003-A20	Arctic white(427C)



			DIMENSIONAL TOLERANCES	
			GRADATION	TOLERANCE
5	Cover back of the Body,NYLON Black Color.	1	X	±0.4
4	Contact PIN Brass Strip t=0.7mm	1	X.X	±0.3
3	Contact PIN Brass Strip t=0.7mm	1	X.XX	±0.1
2	Contact PIN Brass Strip t=0.7mm Ni-Plated	1	ANGLE	±1°
1	Body Insulator NYLON	1		
APPROVED: 洪 101.12.06 銘福			CHECK: 蔡 101.12.06 伯林	
DRAWER: 謝 101.12.06 祺祥			MATERIAL NO: SWRF-6003 Series	
			DRAWING NO: 941-0113	

NO: TWI-K-1V13(F)

SWEETA PRODUCTS CORPORATION