
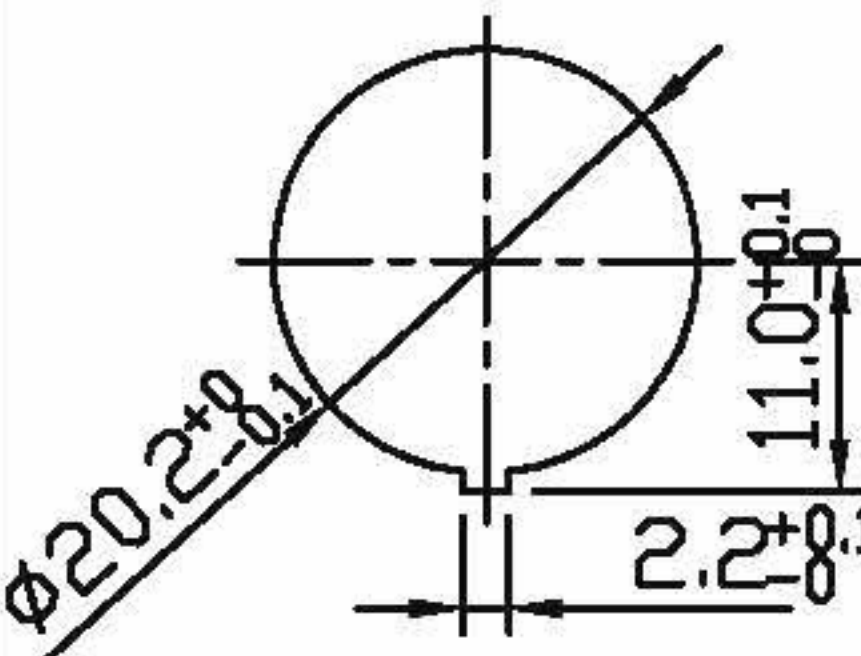



Rating	16A 125VAC, 10A 250VAC 	Mounting Hole
	10A 125VAC, 6A 250VAC CQC	
	10(4)A 250V~ 	
Contact R	50m ohm Max.	 Thickness:2.0~3.0
Insulation R	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-25°C~85°C	
Circuit	3P SPST (ON)-OFF (LED)	

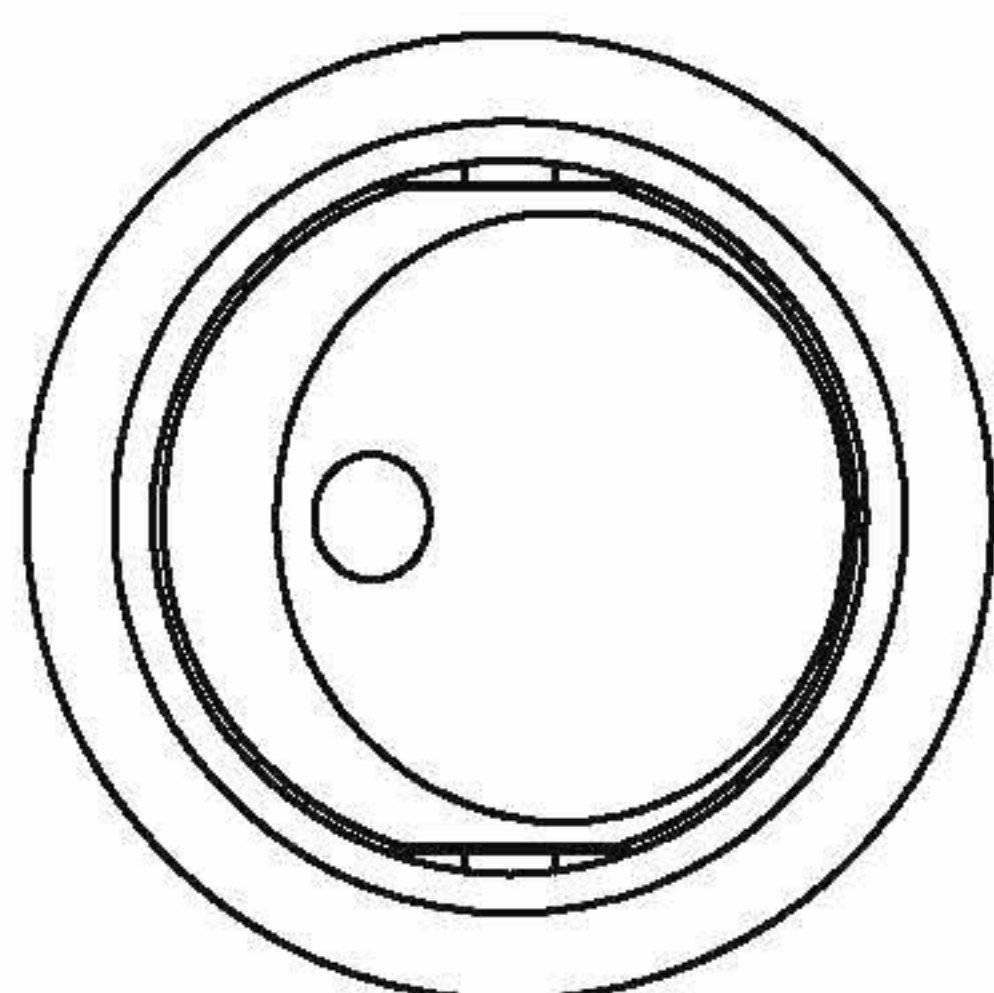





*MATERIAL:
Frame: Black, Nylon 66 (94-V2)
Actuator: Black, Nylon 66 (94-V2)

Circuit Diagram

OFF

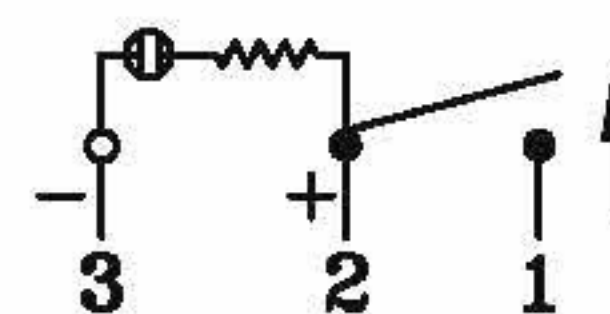

(ON)

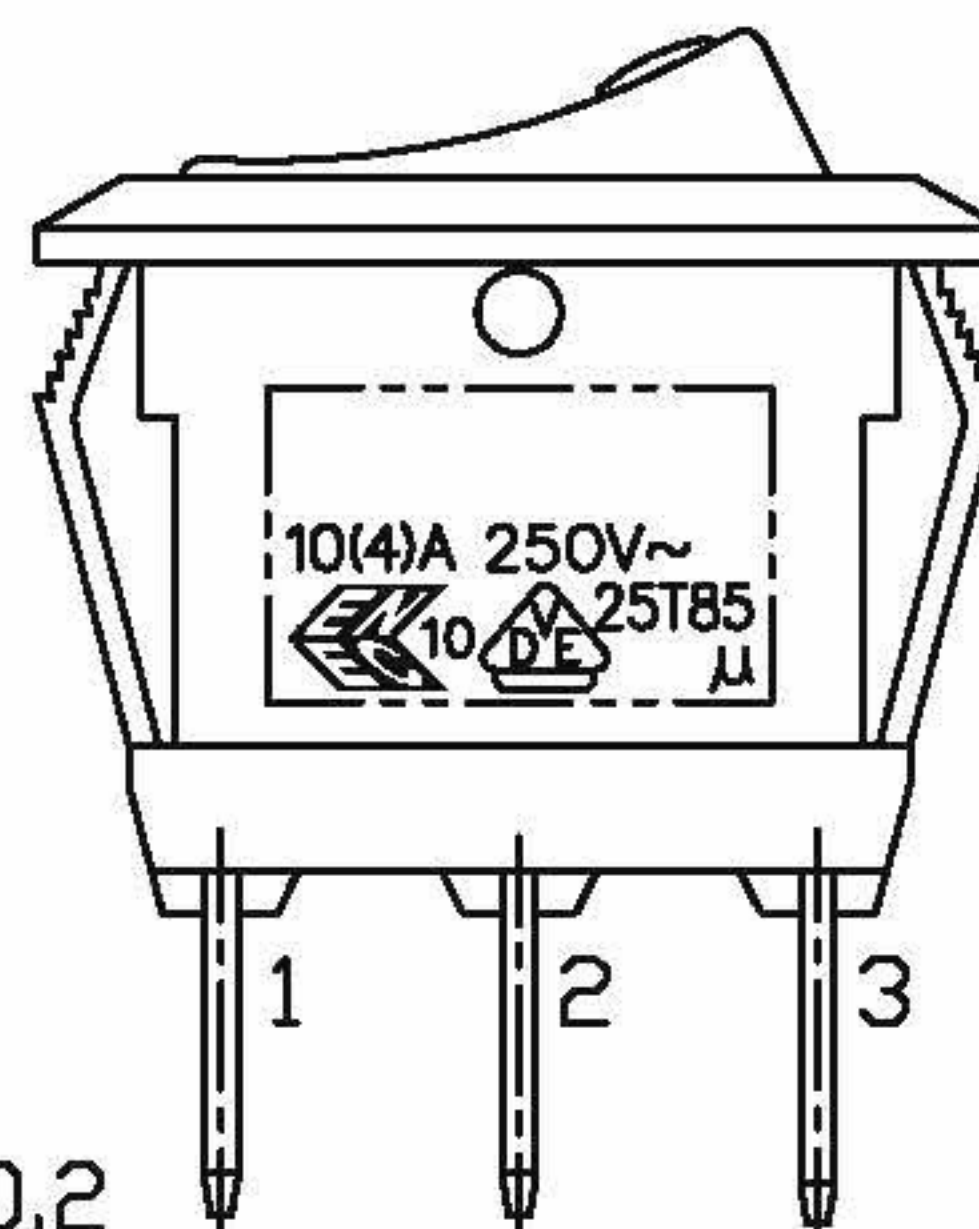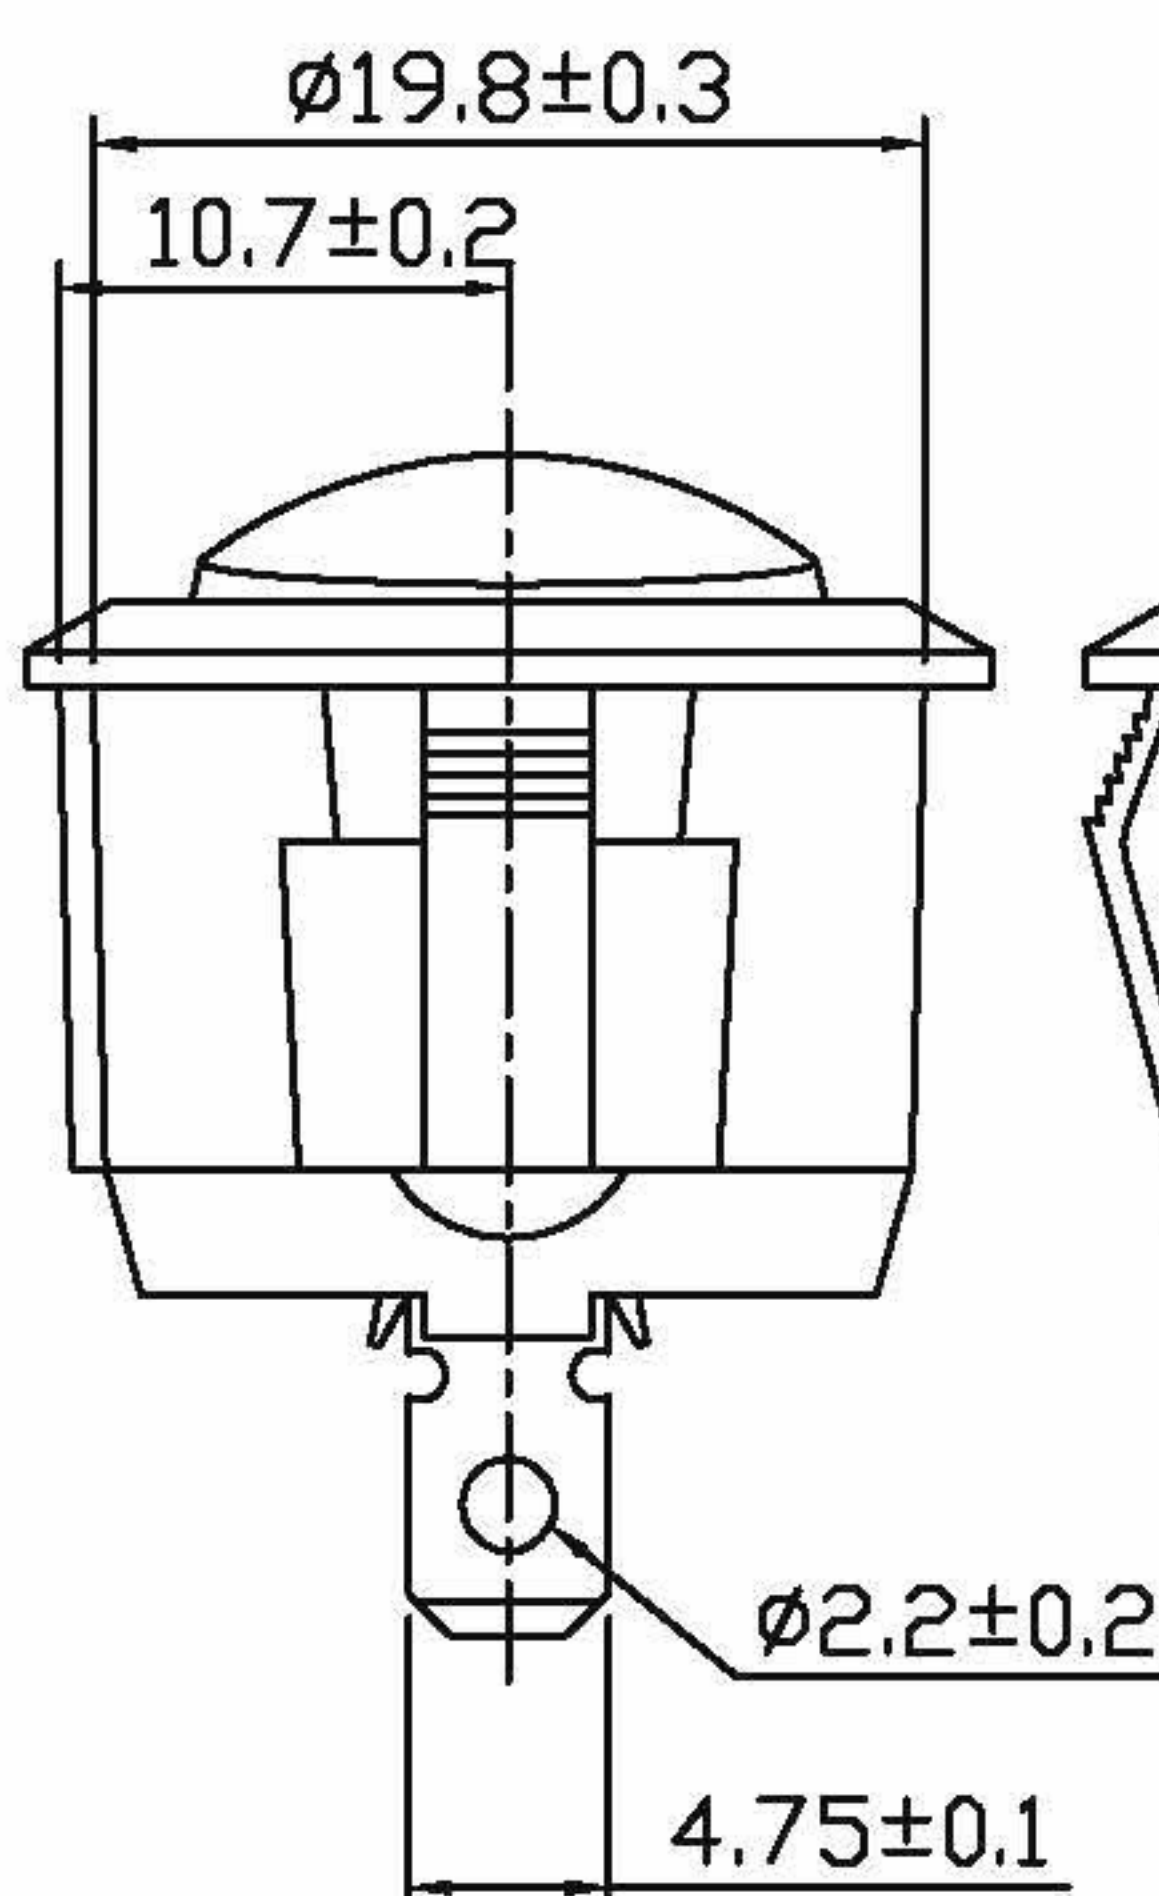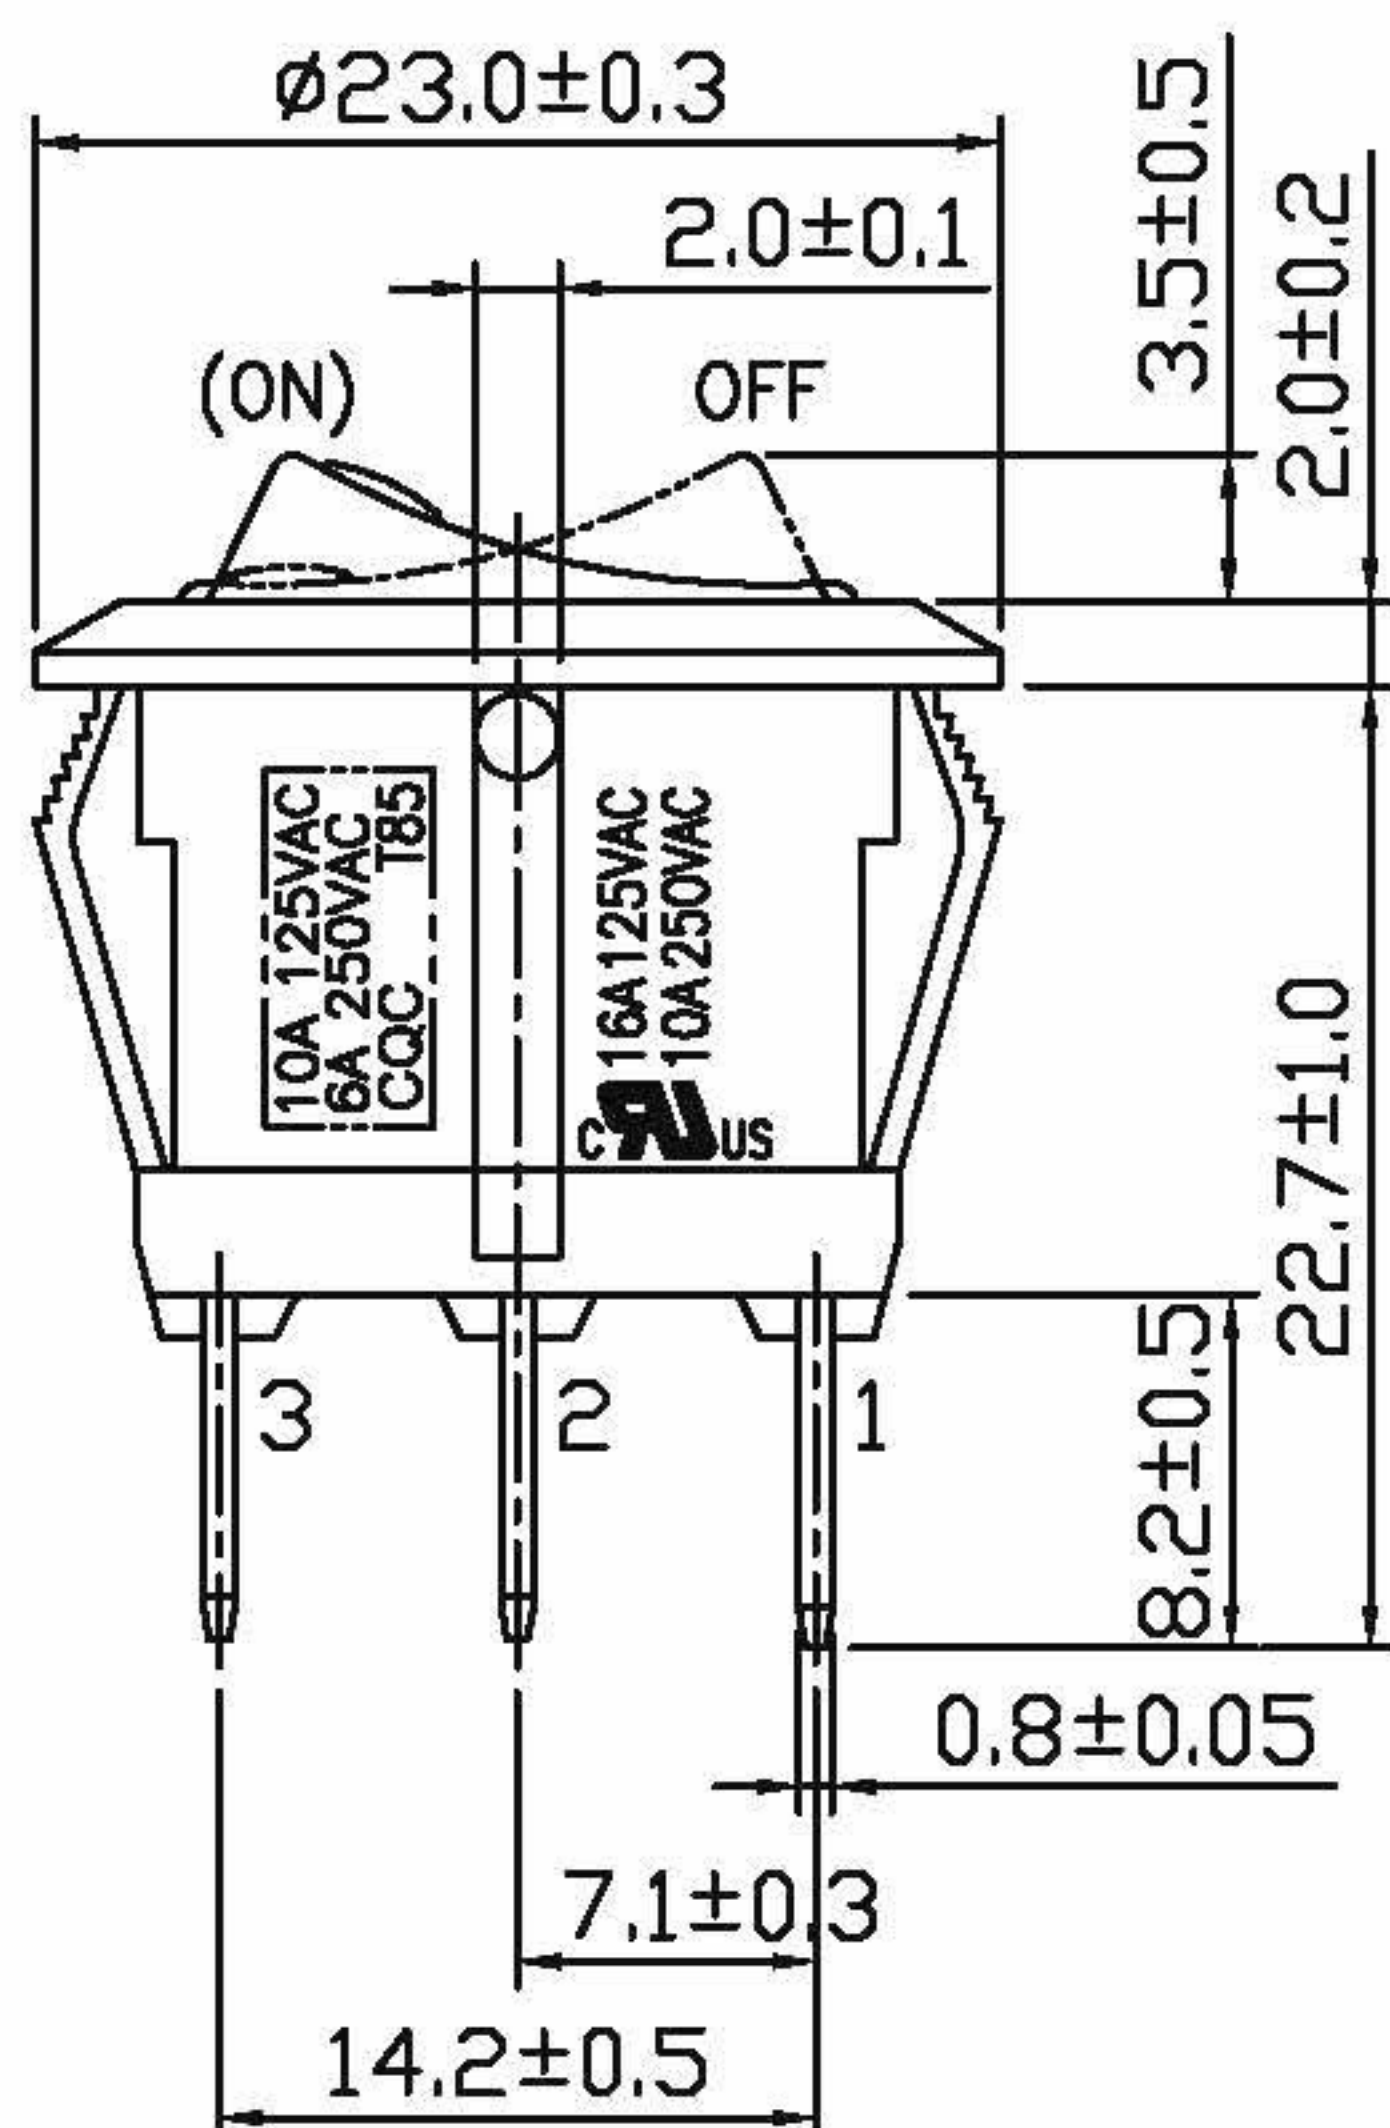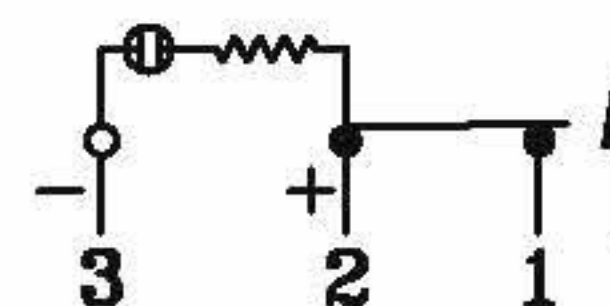

C8\R13\SR13-112B2FW-02

							△
							△
Date	Name	Descriptions					REV. 0 NO
Drawing	Check	Approval	SCI No.			Model Name	ROCKER SWITCH
曹 盈 芳	王 伯 山	李 景 煌	Customer No.			Model No.	SR13-112B2F-02
05/30/'06	05/30/'06	05/30/'06	Unit	mm	SWEETA PRODUCTS CORPORATION		