
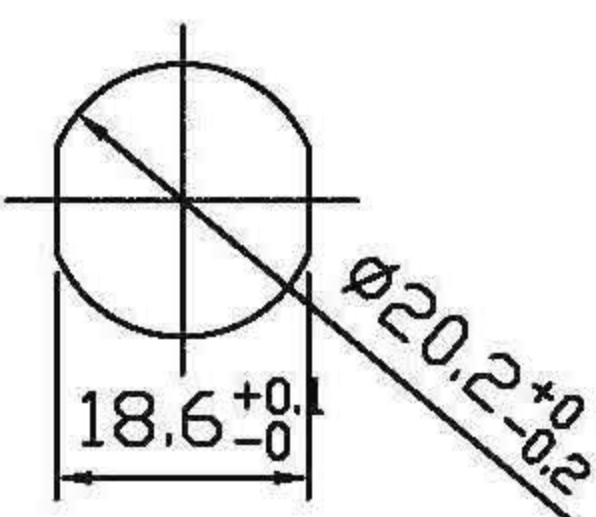



Rating	16A 125VAC,10A 250VAC 	Mounting Hole	Circuit Diagram
	10A 125VAC,6A 250VAC GQC		
	10(4)A 250V~  		
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°C~85°C		
Switch Function	2P SPST ON-OFF		

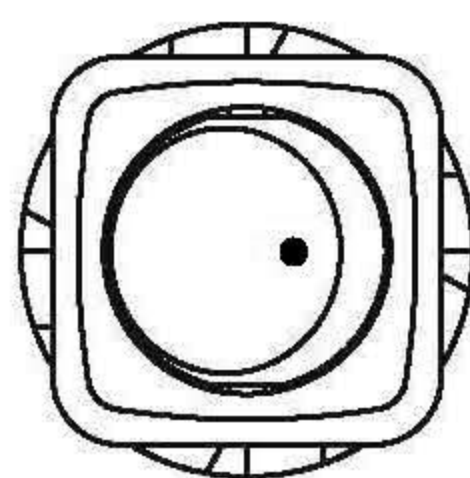





*Material

Frame: Nylon#66+33%GF, Black

Actuator: Nylon#66, Black

Terminal: Copper alloy, Silver plated

Printed: Hot Stamping

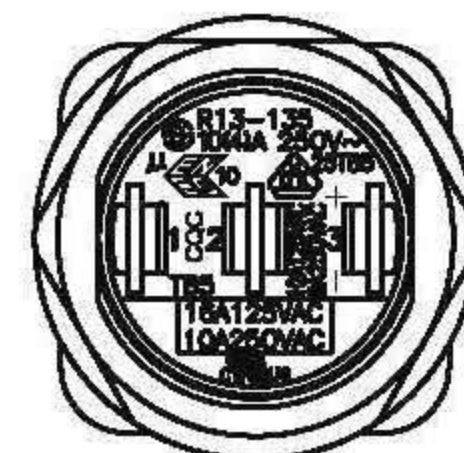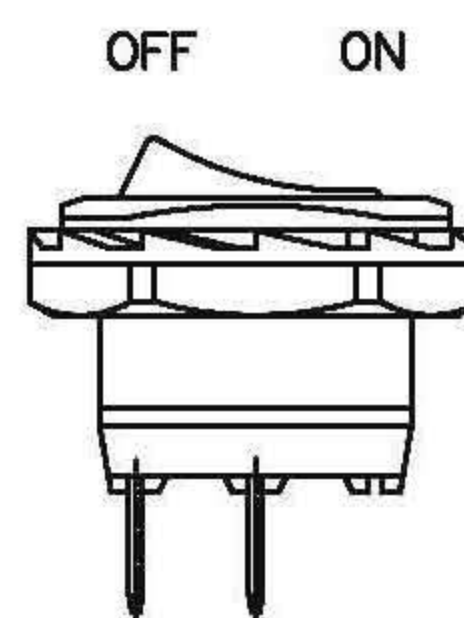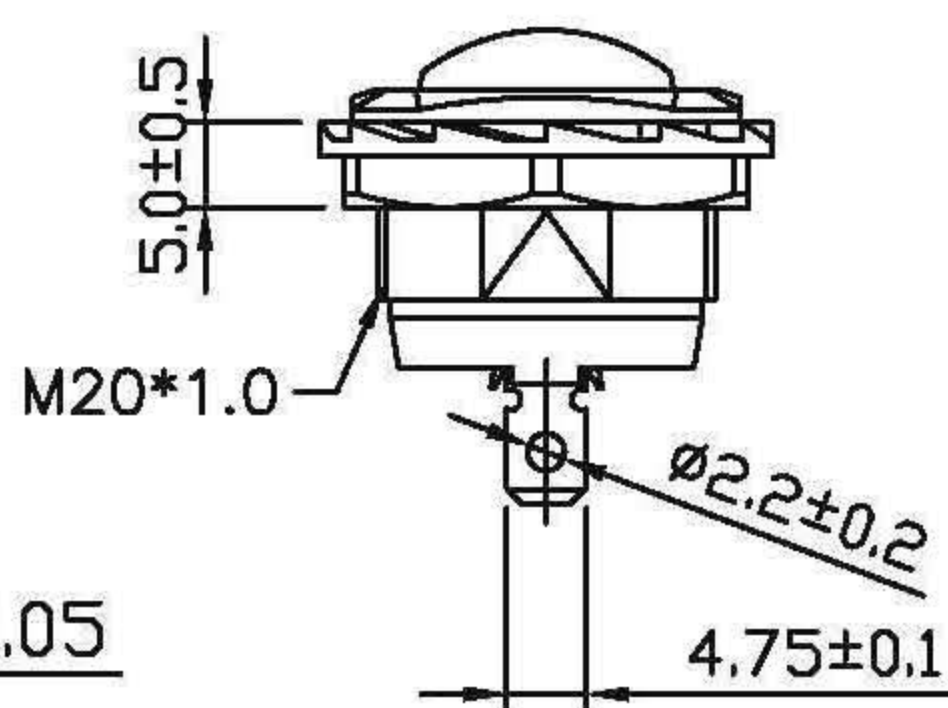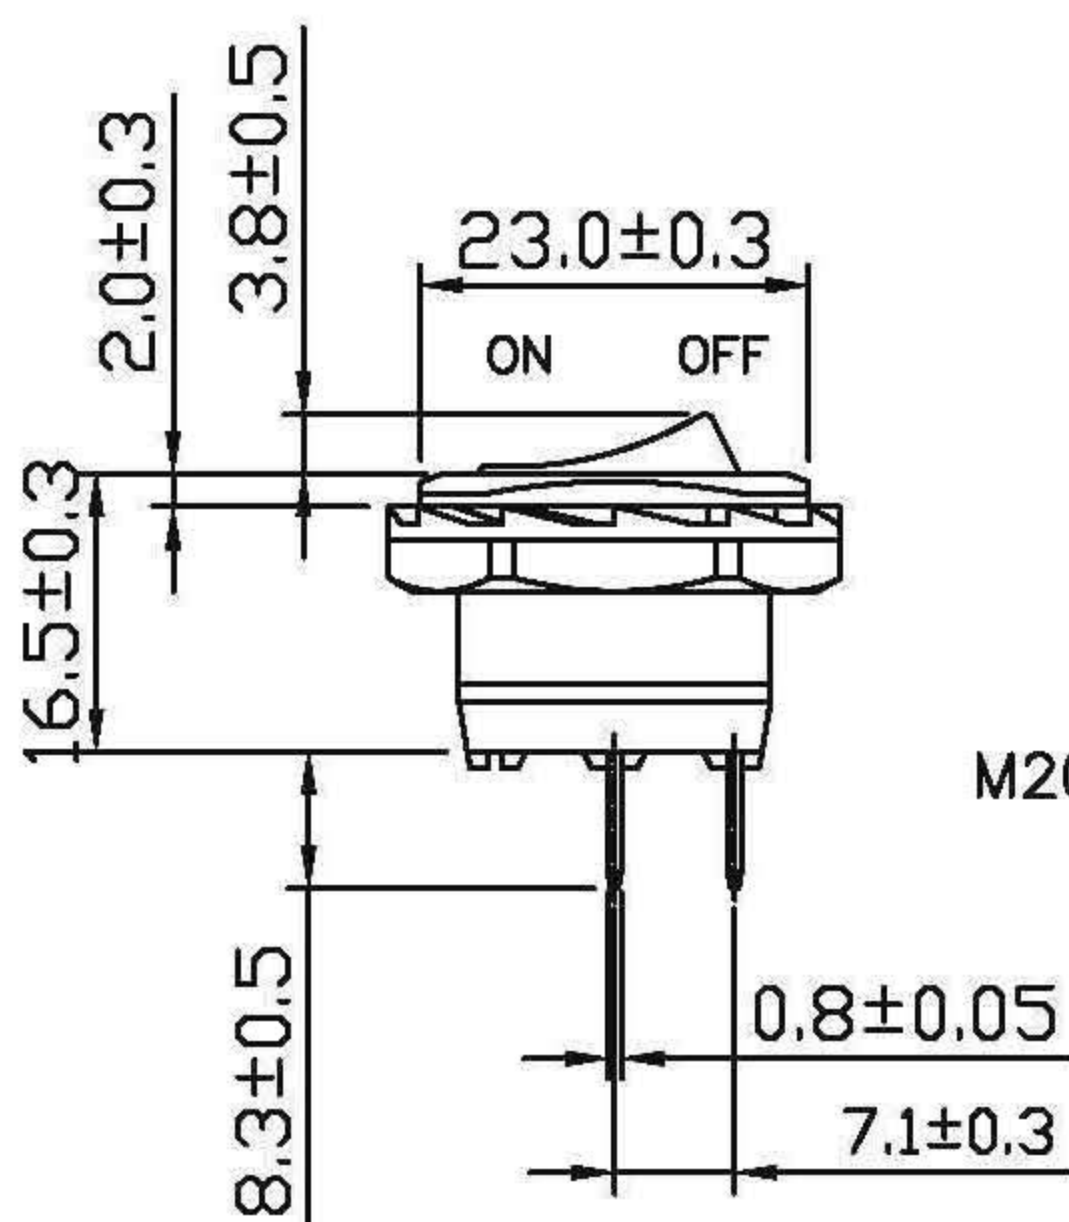

							△
01/15/'10	歐陽安	Accord UL approval information to update drawing.					△
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.	1820942	Model Name	ROCKER SWITCH	
歐陽安	楊金江	王佰山	Customer No.	R13-135A-02	Model No.	SR13-135AKKAT0C-V	REV.
01/15/'10	02/06/'10	02/22/'10	Unit	mm	SWEETA PRODUCTS CORPORATION		1