Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP 10(4)A 250V~	Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max.	 Thickness=1.0...4.0	 R=150KΩ NEON
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	3P SPST ON-OFF(Illuminated)		

Material:
Frame: Nylon 66, Black
Actuator: PC, Red
Printed: None



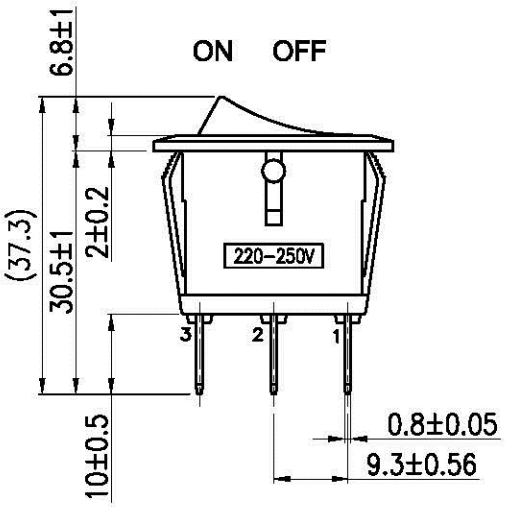

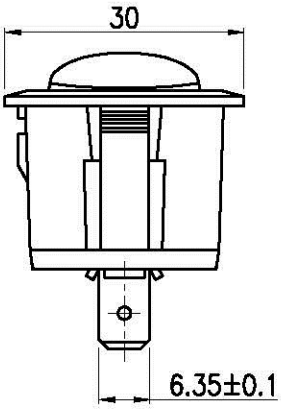





1、Tolerances Unless Otherwise Specified ±0.3

							△
							△
Date	Name	Description					No.
Drawn	Checked	Approved	SCI BOM No.	1821253	Model Name	ROCKER SWITCH	
邱 權	楊金江	李元生	Customer No.		Model No.	SR13-223B-01	Rev.
02/16/'11	03/21/'11	03/23/'11	Unit	mm	SWEETA PRODUCTS CORPORATION		0