

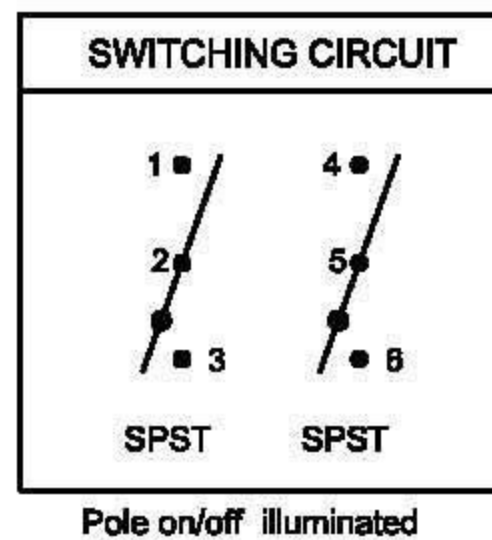
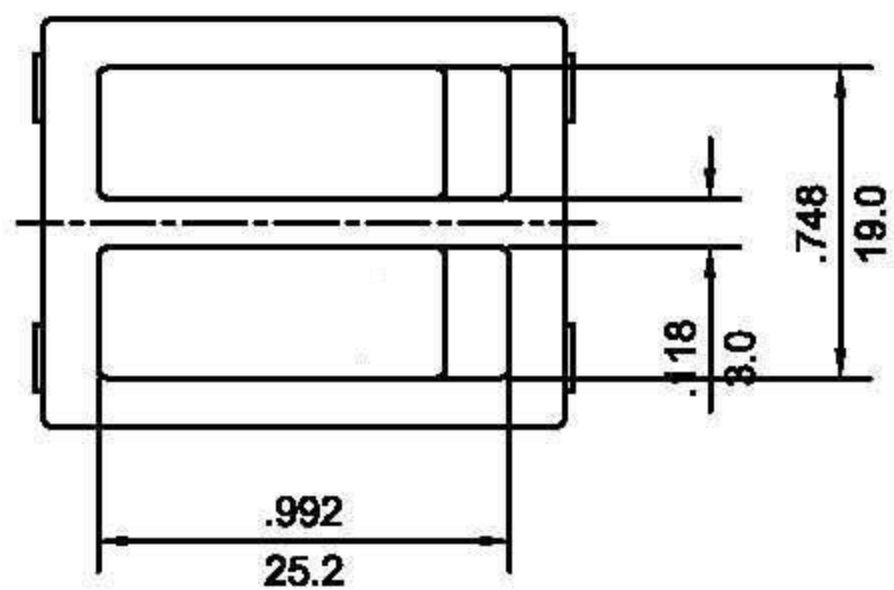
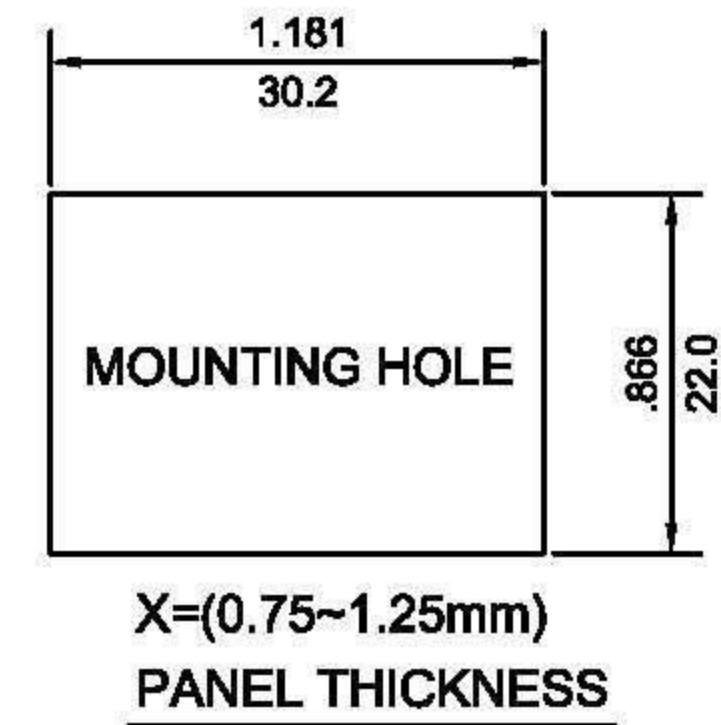


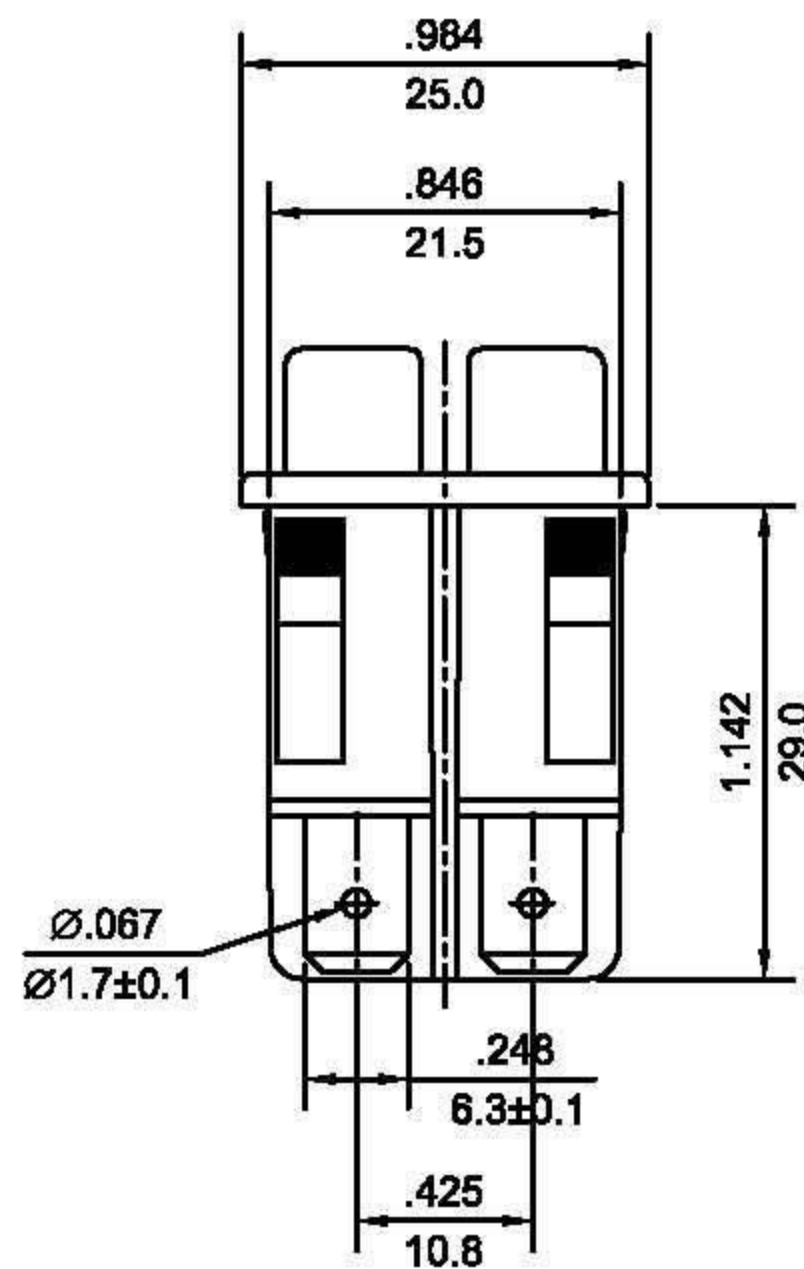

ROCKER SWITCH MODEL: R SERIES

RATING:(1) 16A 125VAC (UL/CSA)
(2) 16A 250VAC (UL/CSA)
(3) 20A 125VAC (UL)
(4) 16(4)A 250V~T125 (VDE/ENEC/CQC)
(5) 10(2)A 250V~T125

DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MIN
INSULATION RESISTANCE: 100MΩ (MIN)
CONTACT RESISTANCE: 20mΩ (MAX.)
ILLUMINATED: 100~125VAC

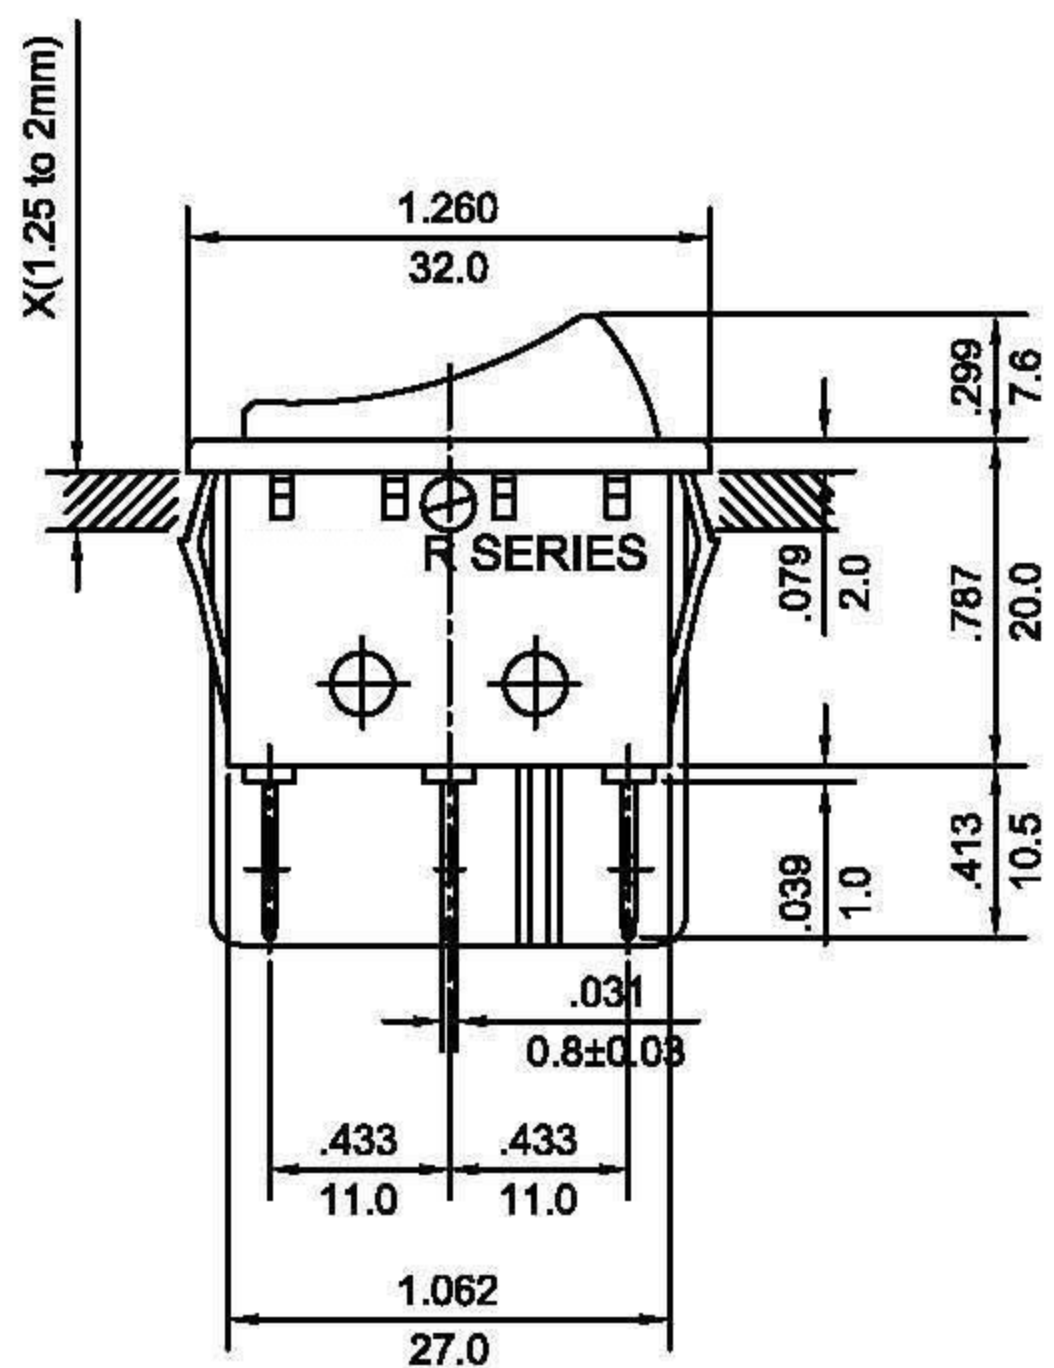

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm \frac{0.12}{0.3}$ (in/mm)

[illegible]