
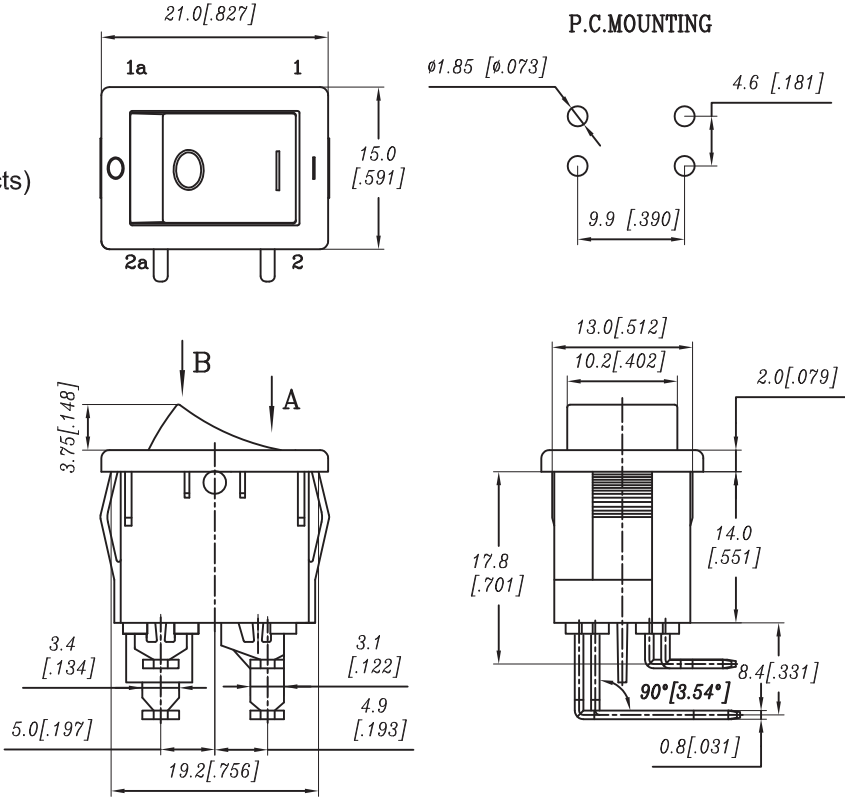


- 1、All dimensions in mm [Inch]
2、General tolerance : $>10\pm0.4$
 $<10\pm0.25$
3、Electrical rating : 6A 250VAC & 12A 125VAC
4(1)A 250VAC
4、Contact resistance : $<20\text{m}\Omega$ (initial)
5、Insulation resistance : $>1000\text{M}\Omega$ (500VDC between open contacts)
6、Dielectric strength : $>1500\text{V}$ 1 minute
7、Mechanical life : >30000 cycles
8、Electrical life : >10000 cycles
9、Temperature rise at the terminal : Max.30℃
10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)




Color	Housing	Actuator
K(Black)	✓	✓
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
DPST	1-1a 2-2a	—	OFF

A	B	C	D	E	F	G	H	I
						✓		

PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	12.90~13.10 [.508~.515]	19.1~19.2 [.752~.756]
1.25~2.0 [.049~.079]	12.90~13.10 [.508~.515]	19.3~19.4 [.760~.764]
2.0~3.0 [.079~.118]	12.90~13.10 [.508~.515]	19.4~19.6 [.764~.772]



* We keep the right to alter the dimension without notice.

Part NO.	SR9D2KKGR0FR-G	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
Dwg. NO.	R9D2KKGR00F1						
Series NO.	R19	Drawing	wuyong	Auditing	wangchangjian		
Dwg.Name	Specification	Scale	2:1	Date	03/28/07	Page	