


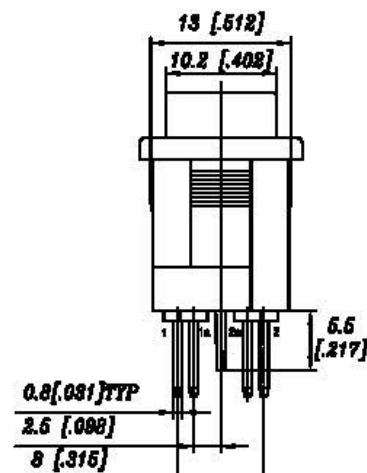
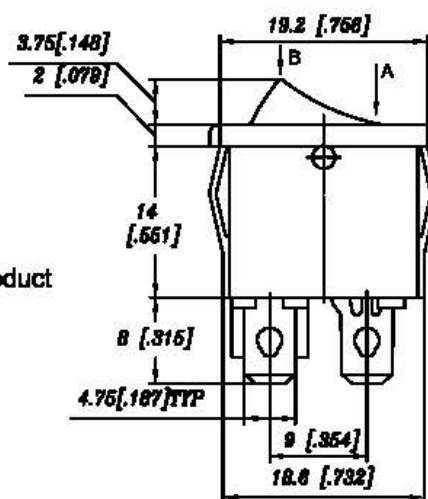


- 1、All dimensions in mm [Inch]
- 2、General tolerance : $>10\pm 0.4$
 $<10\pm 0.25$
- 3、Electrical rating : 6A 250VAC & 9A 125VAC(UL)
- 4、Contact resistance : $<20\text{m}\Omega$ (initial)
- 5、Insulation resistance : $>1000\text{M}\Omega$ (500VDC between open contacts)
- 6、Dielectric strength : $>1500\text{V}$ 1 minute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product



CIRCUIT DPST




Color	Housing	Actuator
K(Black)	✓	
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		✓

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
DPST	1-1a 2-2a	—	OFF

•	— ○ =	I ○ II	I II		I ○	— ○	△ ○ ▽	ON OFF
A	B	C	D	E	F	G	H	I
					✓			

PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	12.90~13.10 [.508~.515]	18.1~18.2 [.752~.756]
1.25~2.0 [.049~.079]	12.90~13.10 [.508~.515]	18.3~18.4 [.780~.784]
2.0~3.0 [.079~.118]	12.90~13.10 [.508~.515]	19.4~19.6 [.764~.772]
3.0~4.0 [.118~.157]	12.90~13.10 [.508~.515]	19.6~19.8 [.772~.780]



* We keep the right to alter the dimension without notice.

Part NO.	SR9Y2KDFT3F	喜威達 企業股份有限公司 SWEETA PRODUCTS CORPORATION			
Dwg. NO.	R9Y2-60816				
Series NO.	R19	Drawing	Ilzhll	Auditing Wangchangjian	
Dwg.Name	Specification	Scale	2:1	Date	06/08/16 Page