




- 1、All dimensions in mm [Inch]
- 2、General tolerance :>10±0.4
<10±0.25
- 3、Electrical rating : 6A 250V
- 4、Contact resistance : <20mΩ(initial)
- 5、Insulation resistance : >1000MΩ(500DC between open contacts)
- 6、Dielectric strength : >1500V 1 mintute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃,3S(no pressure may
be placed in the terminals when soldering by hand)
- 11、Any、Cd、Pb、Hg etc and it's compounds is not include in this prouct




POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
SPST	1-1a	—	OFF

PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	12.9~13.1 [.508~.516]	19.2~19.3 [.756~.760]
1.25~2.0 [.049~.079]	12.9~13.1 [.508~.516]	19.3~19.4 [.760~.764]
2.0~3.0 [.079~.118]	12.9~13.1 [.508~.516]	19.5~19.6 [.768~.772]

* We keep the right to alter the diamension without notice.

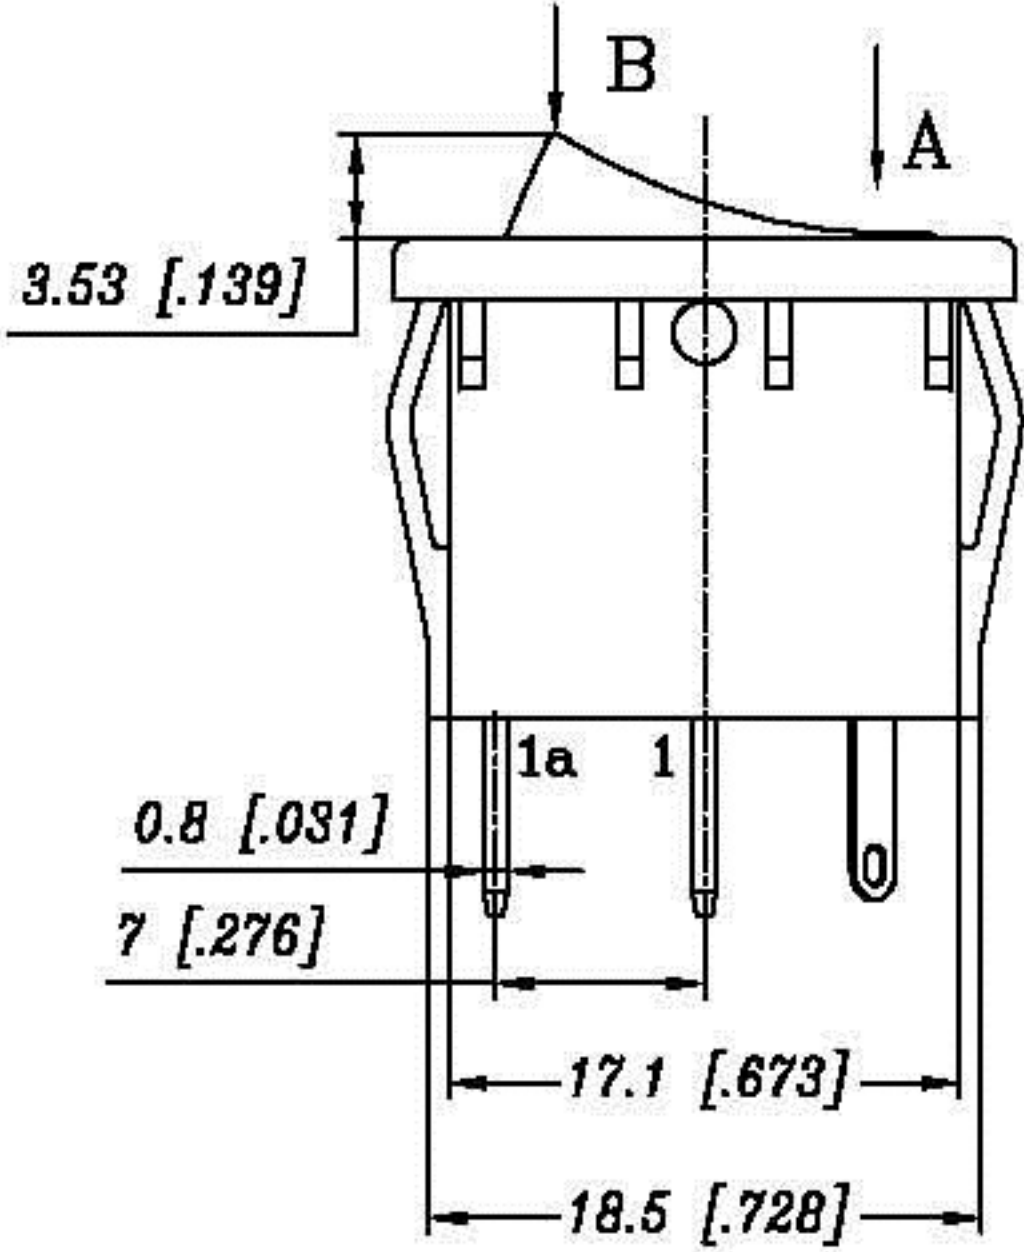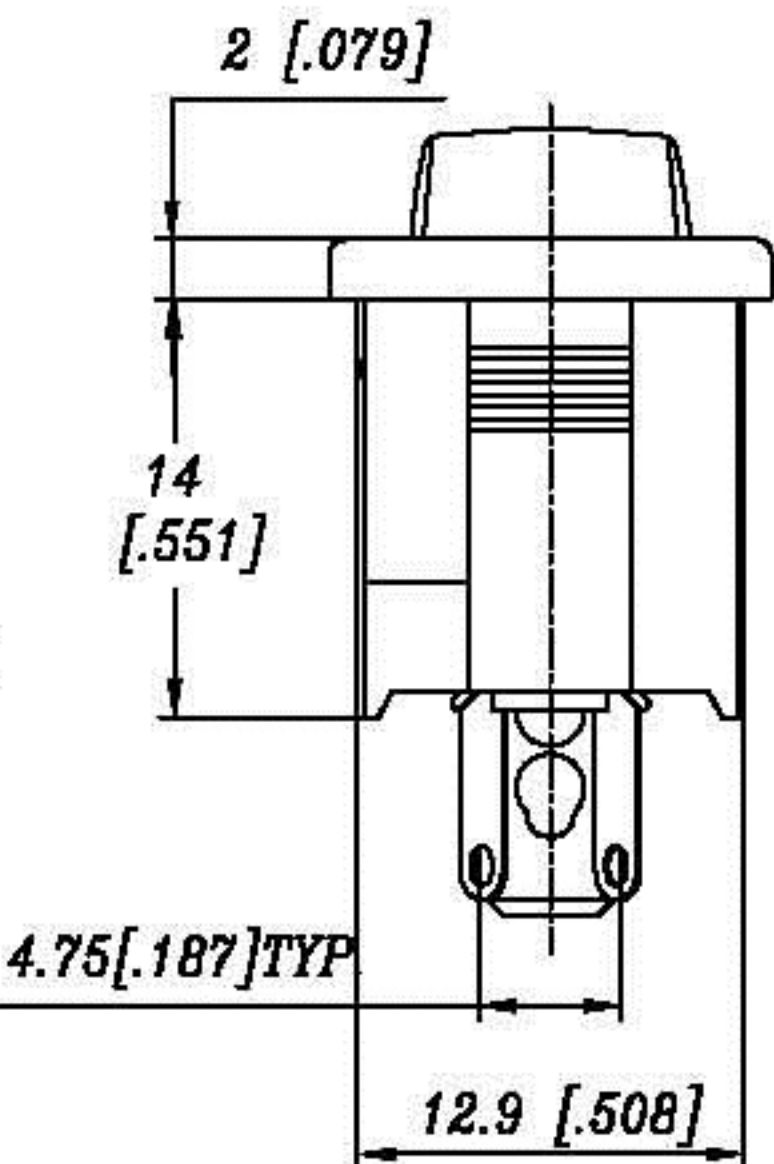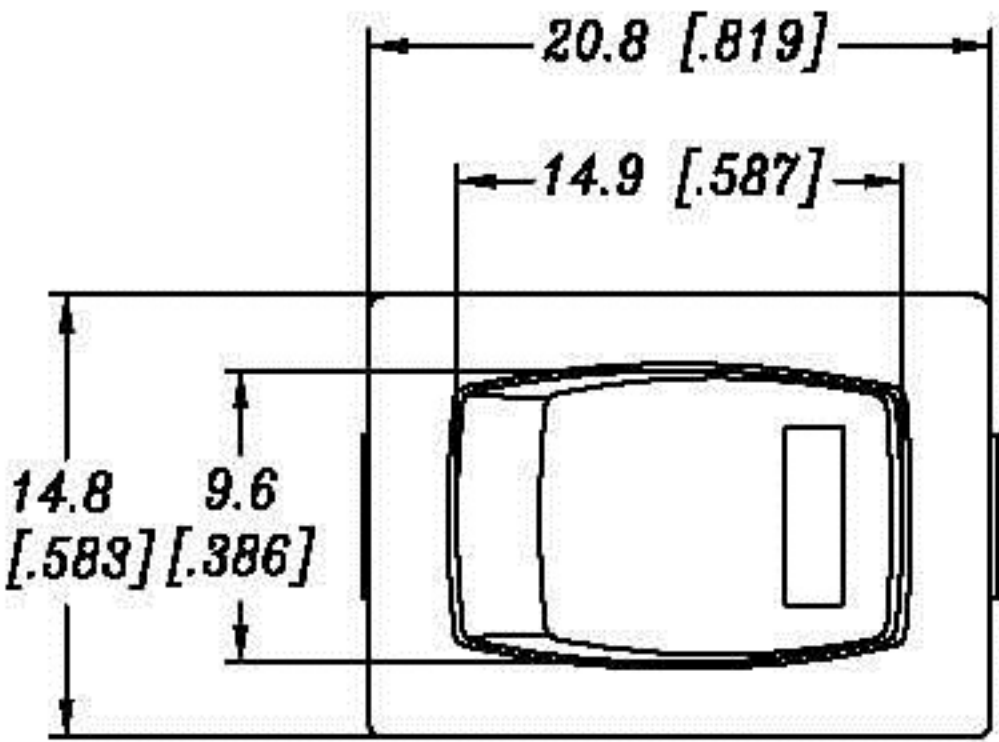

Color	Housing	Actuator
K(Black)	√	√
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

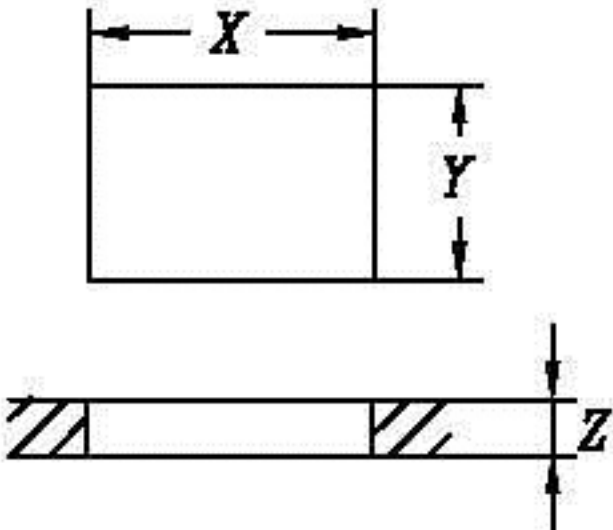

Part No.	SRA92KKETRF	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
Dwg. NO.	RA95-61130						
Series NO.	R19A	Drawing	lizhili	Auditing	wangchangjian		
Dwg Name	Specification	Scale	2:1	Date	11/30/06	Page	