



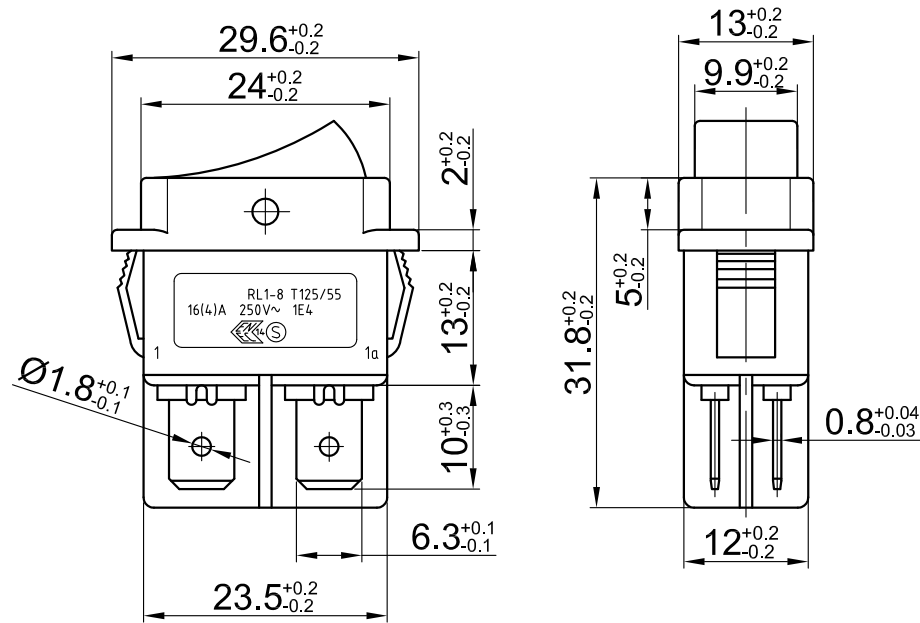



## SPECIFICATION

- RATING:UL C-UL:16A 125VAC T105  
1/2HP 125V/250VAC  
ENEC SEMKO:  
16(4)A 250VAC T125/55 1E4
- CIRCUIT:ON-OFF DPST 4P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:300~600gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

## PANEL HOLE SIZE



## CIRCUIT DIAGRAM

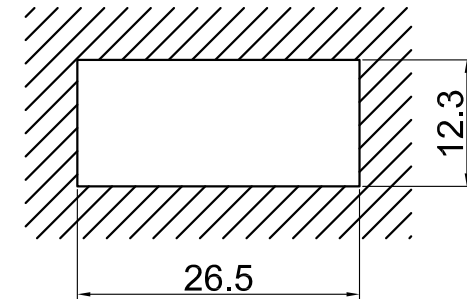

## MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:Nylon #66 UL 94V-2
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10)/Cu

| 喜威達企業股份有限公司<br>SWEETA PRODUCTS CORPORATION |     |          |     |    |     | SRL1-8-21-C-2-BK/BK-P1 |                    |
|--------------------------------------------|-----|----------|-----|----|-----|------------------------|--------------------|
| 设计                                         | 签名  | 年月日      | 标准化 | 签名 | 年月日 | ROCKER SWITCH          | SERIES<br>SRL1-8   |
| 绘图                                         | 符辉  | 15.10.03 |     |    |     |                        | FUNCTION<br>ON-OFF |
| 审核                                         | 张雪飞 |          |     |    |     | VIEWS TYPE<br>         | DRAWING NUMBER     |
| 工艺                                         |     |          | 批准  |    |     |                        |                    |