


Schematic

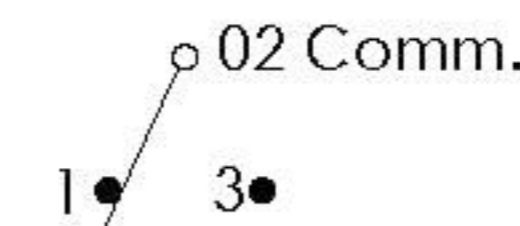

Model No.	Switching Position		
	ON	NONE	ON
RS-81	ON	NONE	ON
RS-82	ON	OFF	ON
RS-83	ON	NONE	(ON)
Term Comm.	2-3	OPEN	2-1

SPECIFICATIONS:

CONTACT RATING : 3 AMPS @ 120 V AC or 28 V DC.
 1.5 AMPS @ 250 V AC or 0.4 AMPS @ 20V AC or DC
 ELECTRICAL LIFE : 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 20 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : Nylon, black standard.
 BUSHING : Brass, nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION 235台北縣中和市中正路799號1樓 TEL:886-2-2226-8001 FAX:886-2-2226-8002 http://www.sweeta.com E-mail:sweeta.tw@msa.hinet.net			TOLERANCE
			XX. ±0.5
			X. ±0.2
ITEM NO		DATA	X ±0.2
CHECKED BY		DRAWN BY	XX ±0.2