

Rating: 15A 300VAC

Pitch: 8.25mm

SPECIFICATION:

Wire Range: 14 TO 22 AWG

Body material: Thermoplastic (UL 94V-0), Black


Terminals: Brass Tin Plated

Screws: Steel Nickel Plated

Insulation Withstands: Voltage AC 2000V/Min

Insulation Resistance: 500MΩ or More AT DC 500V

Approval: 

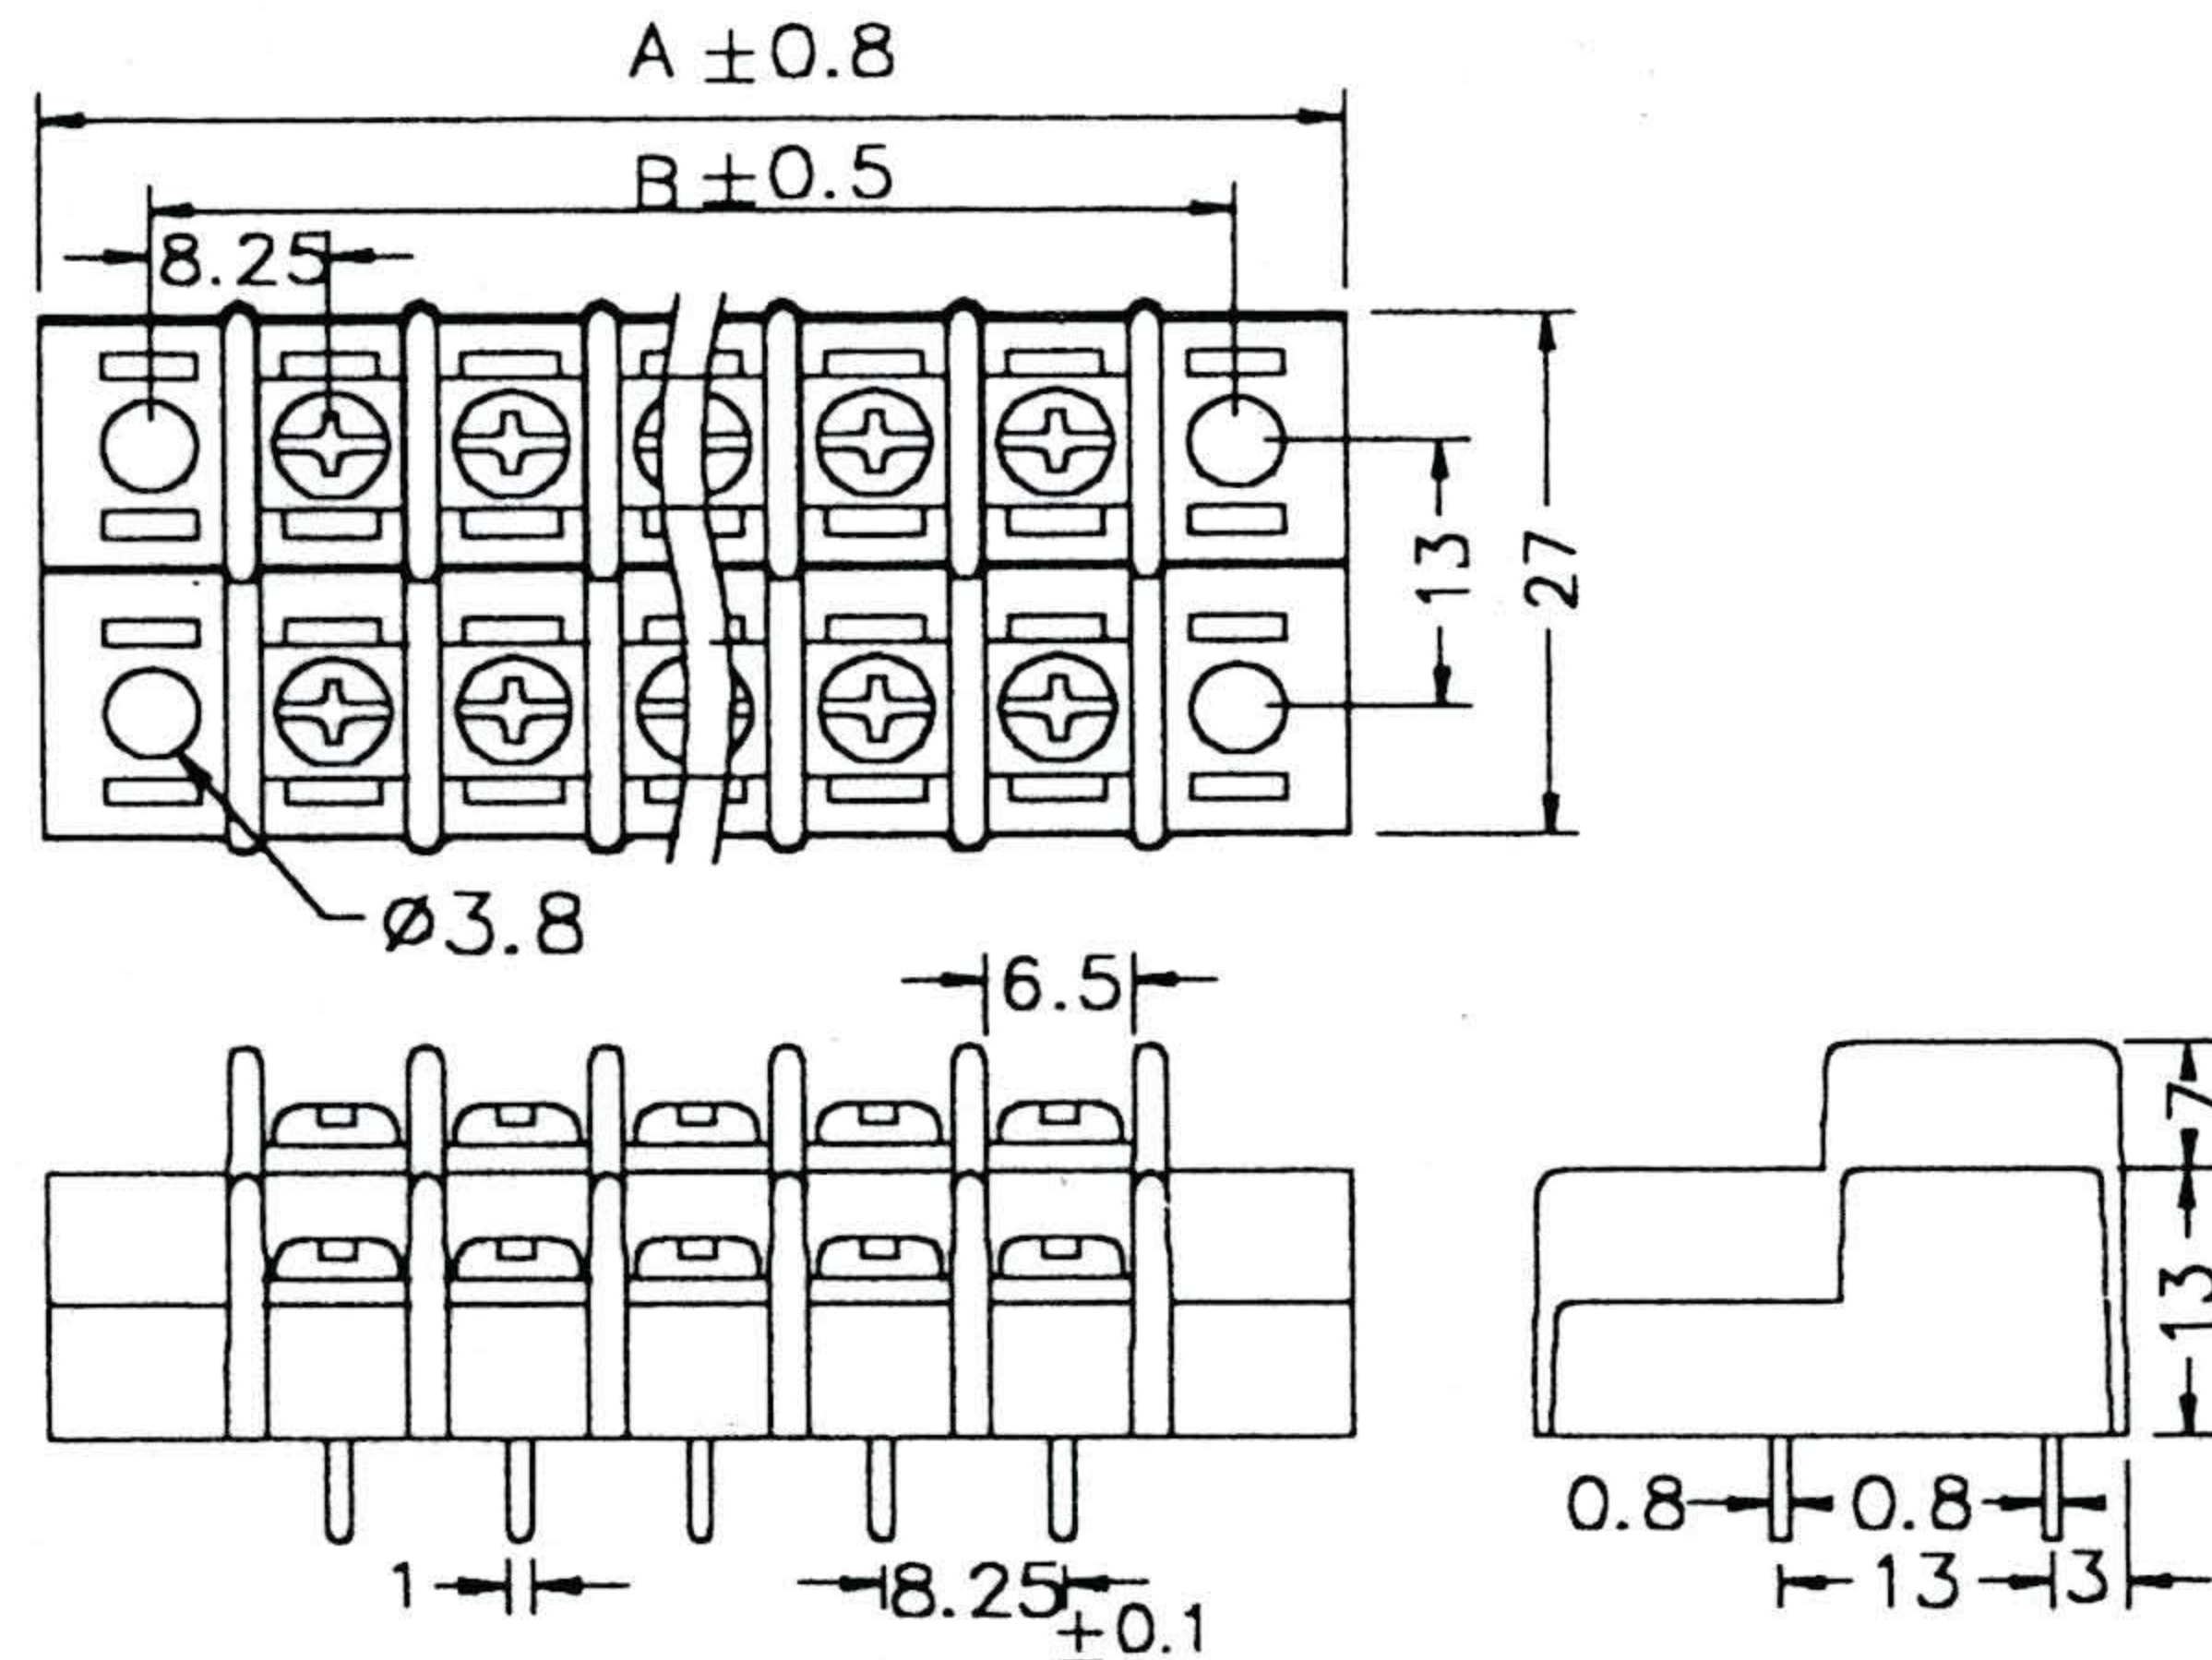

DIMENSION: mm to inch

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A ± 0.8	34.8 (1.370)	43 (1.693)	51.3 (2.020)	59.5 (2.342)	67.8 (2.670)	76 (2.992)	84.3 (3.315)	92.5 (3.642)	100.8 (3.968)	109 (4.291)	117.3 (4.606)	125.5 (4.941)	133.8 (5.268)	142 (5.590)
B ± 0.5	24.75 (0.974)	33 (1.299)	41.25 (1.624)	49.5 (1.949)	57.75 (2.273)	66 (2.598)	74.25 (2.923)	82.5 (3.248)	90.75 (3.573)	99 (3.898)	107.25 (4.222)	115.5 (4.547)	123.75 (4.872)	132 (5.197)

POLE	16	17	18	19	20	21	22	23	24	25	26
A ± 0.8	150.3 (5.917)	158.5 (6.240)	166.8 (6.567)	175 (6.890)	183.3 (7.216)	191.5 (7.539)	199.8 (7.866)	208 (8.189)	216.3 (8.516)	224.5 (8.838)	232.8 (9.165)
B ± 0.5	140.25 (5.522)	148.5 (5.846)	156.25 (6.152)	165 (6.496)	173.25 (6.821)	181.5 (7.146)	189.75 (7.470)	198 (7.795)	206.25 (8.120)	214.5 (8.445)	222.75 (8.770)

NUMBER OF POLE 02~26

NOTE: WITH MOUNT HOLE STANDARD (TO REDUCE 2 POLES FOR W/O MOUNT HOLE)

喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION			ITEM NO.	STGGB110-01-XX			DRAWING NO.	931101-1	
DRAWING BY	Leslie Chen	CHECKED	E. J. Hoich	DATE	Nov./01/04'	UNIT	mm	SCALE	