



ITEM NO. STGGB-140 SERIES PITCH 6.35mm

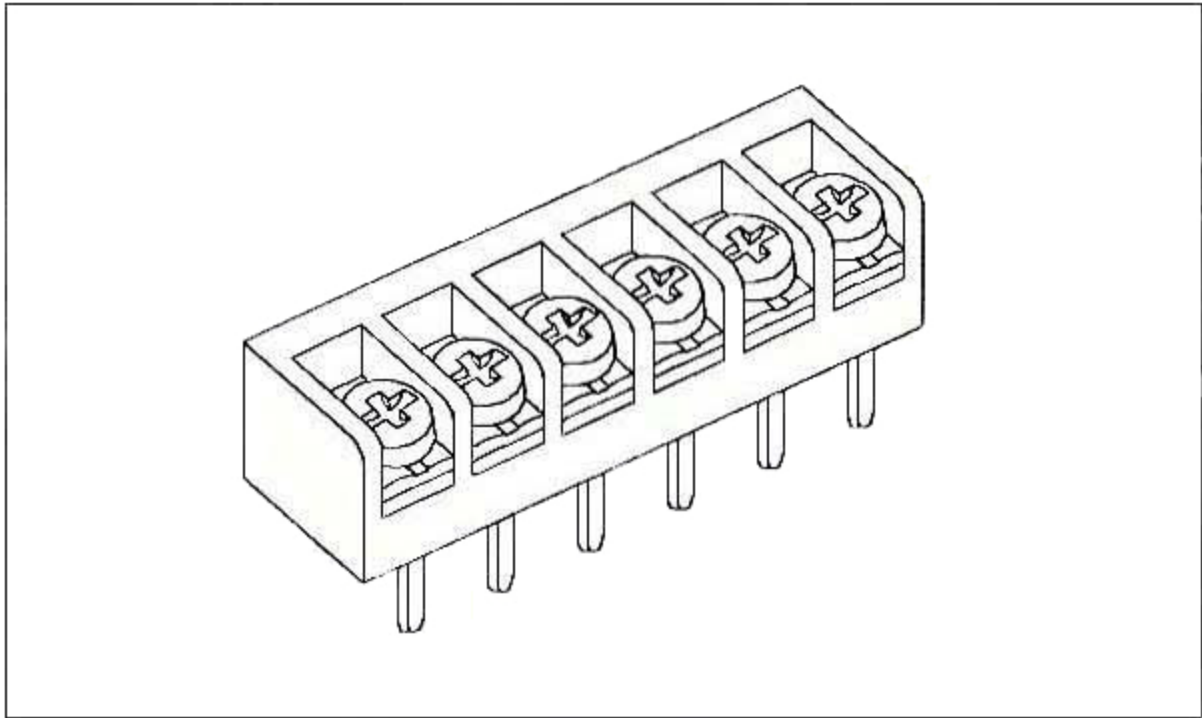

STGGB-140-01

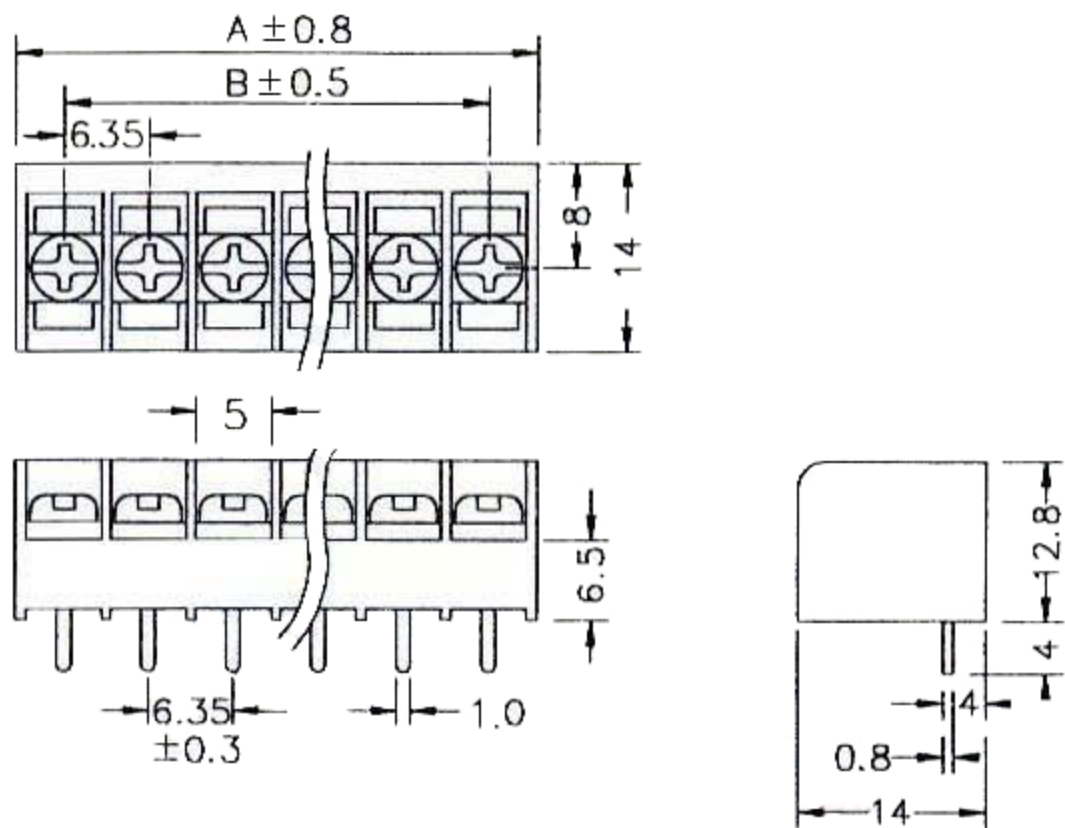

DIMENSION: mm PITCH 6.35mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A±0.8	13.9	20.3	26.6	33	39.4	45.7	52.1	58.5	64.8	71.1	77.5	83.8	90.2	96.5	102.9	109.2
B±0.5	6.35	12.7	19.05	25.4	31.75	38.1	44.45	50.8	57.15	63.5	69.85	76.2	82.55	88.9	95.25	101.6

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A±0.8	115.6	121.9	128.3	134.6	141	147.3	153.7	160	166.4	172.7	179.1	185.4	191.8	198.1	204.5
B±0.5	107.95	114.3	120.65	127	133.35	139.7	146.05	152.4	158.75	165.1	171.45	177.8	184.15	190.5	196.85

NUMBER OF POLE 02 ~32

SPECIFICATIONS

- Rated: 10A 300VAC
- Insulation Withstands Voltage: AC 2000V/min
- Insulation Resistance: 1000MΩ or More at DC500V
- Using Temperature Range: -40 °C ~+120 °C
- Screw Torque Value: 10 Kg-cm
- Wire Range Awg: 16 -22 STR
- Insulator Body : Plastic NYLON 66
- Terminals: Brass, Tin Plated 0.8t
- Terminal Screws: M3 Nickel Plated Steel