



ITEM NO. STGGB-70 SERIES PITCH 7.62mm

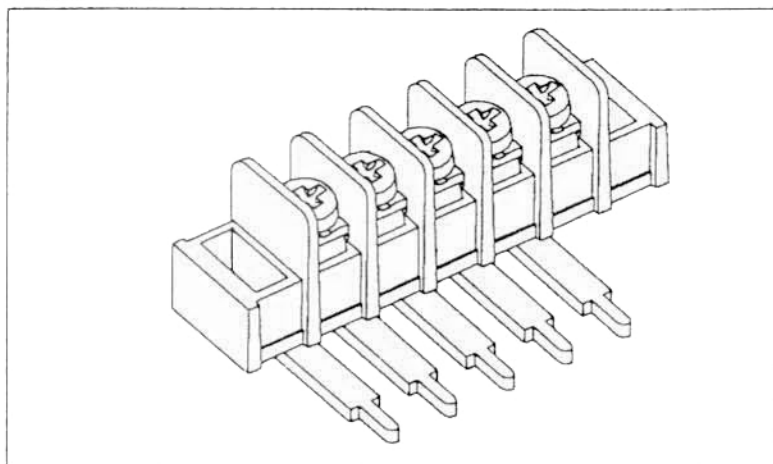

STGGB-70-01

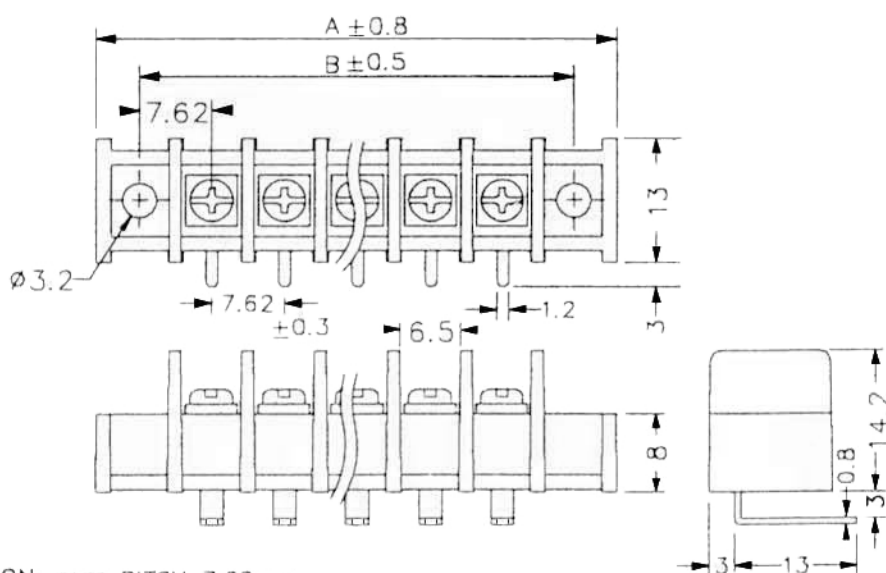

DIMENSION: mm PITCH 7.62mm

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
A ± 0.8	32.2	39.8	47.5	55.1	62.7	70.3	77.9	85.6	93.2	100.8	108.4	116	123.7	131.3	138.9	146.5
B ± 0.5	22.86	30.48	38.1	45.72	53.34	60.96	68.58	76.2	83.82	91.44	99.06	106.68	114.3	121.92	129.54	137.16

POLE	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
A ± 0.8	154.1	161.8	169.4	177	184.6	192.2	200	207.5	215.1	222.7	230.3	238	245.6	253.2	260.8
B ± 0.5	144.78	152.4	160.02	167.64	175.26	182.88	190.5	198.12	205.74	213.36	220.98	228.6	236.22	243.84	251.46

NUMBER OF POLE 02 ~ 32

SPECIFICATIONS

Rated:	10A 300VAC
Insulation Withstands Voltage:	AC 2000V/min
Insulation Resistance:	1000M Ω or More at DC500V
Using Temperature Range:	-40 $^{\circ}$ C ~ +120 $^{\circ}$ C
Screw Torque Value:	10 Kg-cm
Wire Range Awg:	18 - 22 STR
Insulator Body :	Plastic NYLON 66
Terminals:	Brass, Tin Plated 0.8t
Terminal Screws:	M3 Nickel Plated Steel