

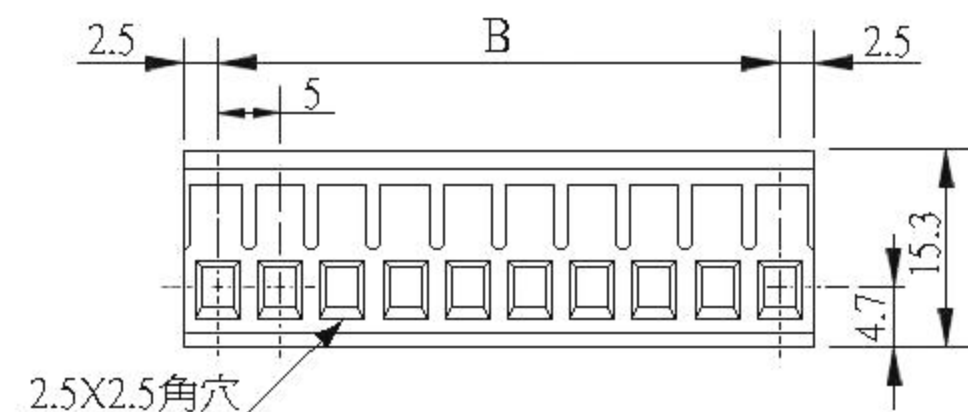
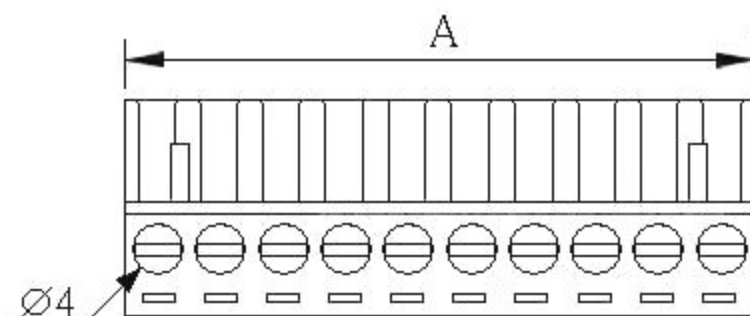


RAV 改版	CHANGE DESCRIPTION 記 錄 說 明	REVISED 修版者	APPROVED 審 核	DATE 日 期

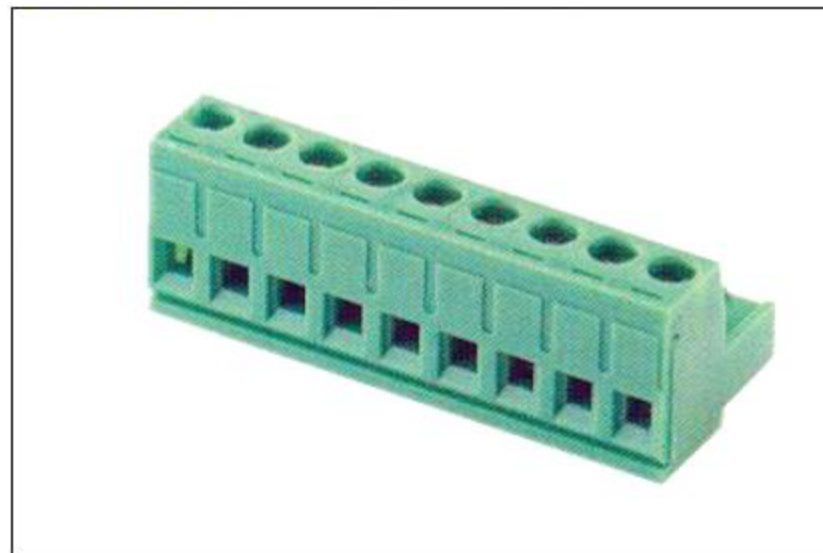

Specifications

Poles	2P ~ 24P
Wire Range	14 to 24 AWG
Housing	Polyamide 6.6, Green.
Clamping	Phoshor Bronze, 0.4t, Nickel Plated.
Wire Cage	Brass, 0.7t Nickel Plated.
Screw	M2.6, Steel. Nickel Plated.
Insul. Withstands Voltage	AC 2000V/min
Insul. Resistance	500MΩ or More at DC 500V
Using Temperature Range	-40°C ~ +105°C
Screw Torque Value	5kg-cm

PITCH : 5.0 mm DIMENSION : ±0.2 mm

POLE	2	3	4	5	6	7	8	9	10
A	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0
B	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0

POLE	11	12	13	14	15	16
A	55.0	60.0	65.0	70.0	75.0	80.0
B	50.0	55.0	60.0	65.0	70.0	75.0

UNIT 單位	SCALE 比例	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		
MM	/			
TOLERANCE 公差		MATL 材料：黃 銅	TILE	
X.X± 0.1		FINISH 處理：鍍 錫	STGGC-80-K	
X.XX± 0.1		DESIGN		
ANGLE 角度	°	設計：	PART NO 料號：	REA 版次
		APPR 核准：	DRAW NO 圖號：	A