
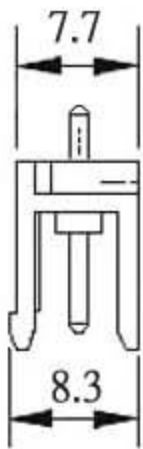
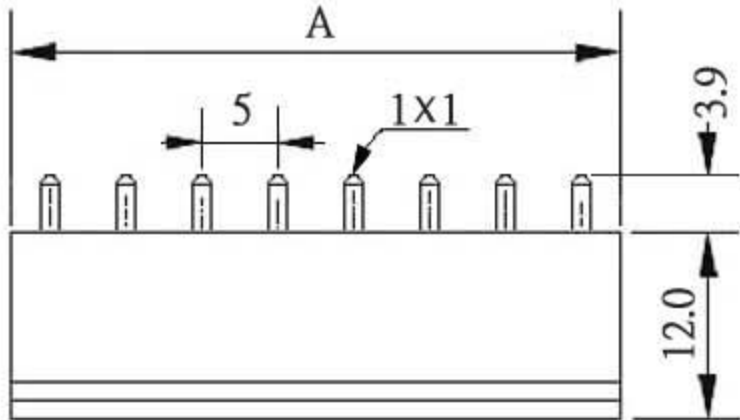


RAV 改版	CHANGE DESCRIPTION 記 錄 說 明	REVISED 修版者	APPROVED 審 核	DATE 日 期

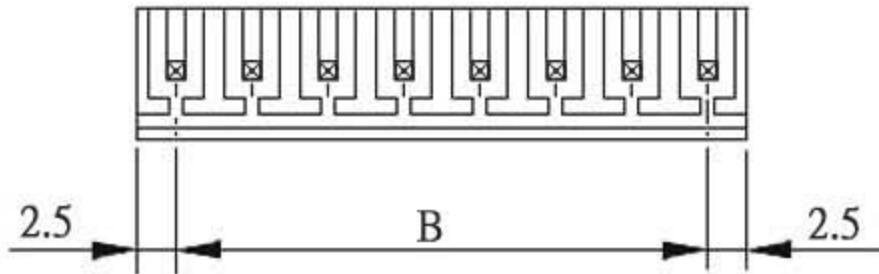

SPECIFICATIONS

負載電壓	Rated Voltage	AC300V
負載電流	Rated Current	10A
塑膠本體	Housing Material	Polyamide66
焊 針	Solder Pin	□ 1.0mm,Brabb,Tin Plated
操作溫度	Operating Temperature	-40℃+105℃
PC板孔徑	PCB Hole Diameter	Ø1.5mm

PITCH : 5.0 mm DIMENSION : ±0.2 mm

POLE	2	3	4	5	6	7	8	9	10
A	12.0	17.0	22.0	27.0	32.0	37.0	42.0	47.0	52.0
B	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0

POLE	11	12	13	14	15	16
A	55.0	60.0	65.0	70.0	75.0	80.0
B	50.0	55.0	60.0	65.0	70.0	75.0

UNIT 單位	SCALE 比例	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		
MM				
TOLERANCE 公 差	MATL 材料：黃 銅	TILE		
X.X ±0.1	FINISH 處理：鍍 錫	STGGC80-V__P		
X.XX ±0.1	DESIGN			
ANGLE 角度	設計：	PART NO 料號：		REA 版次
☐ ⊕	APPR 核准：	DRAW NO 圖號：		A