

A

B

C

D

E

F

A


B

C




D

E


F

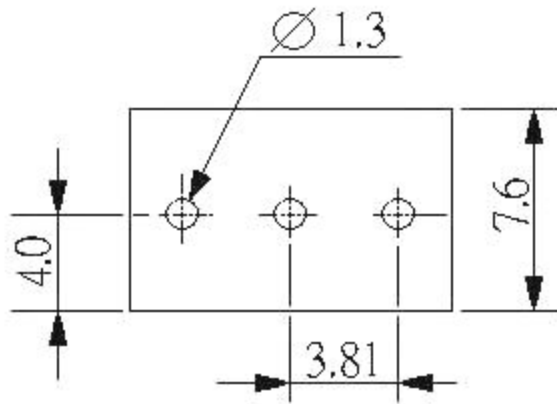

PCB Layout

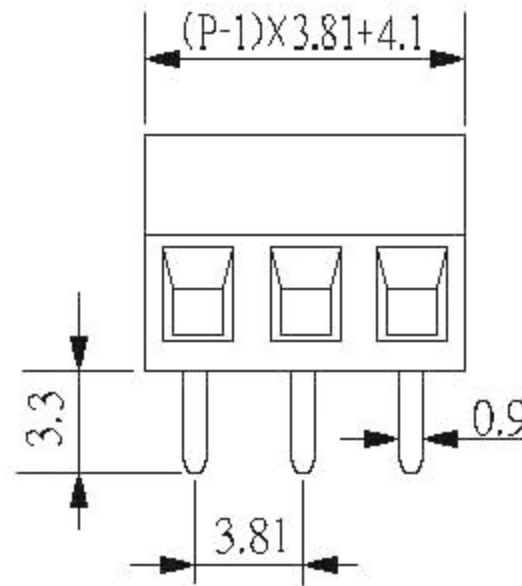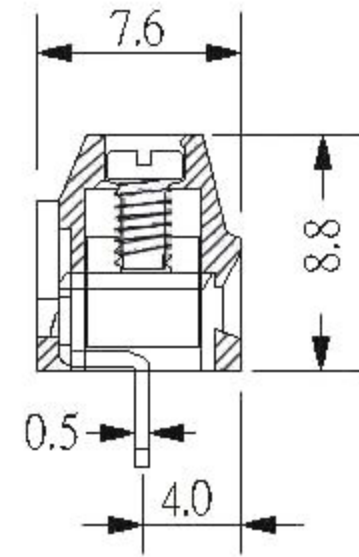

REV 改版	CHANGE DESCRIPTION 記錄說明	REVISED 修版者	APPROVED 審核	DATE 日期

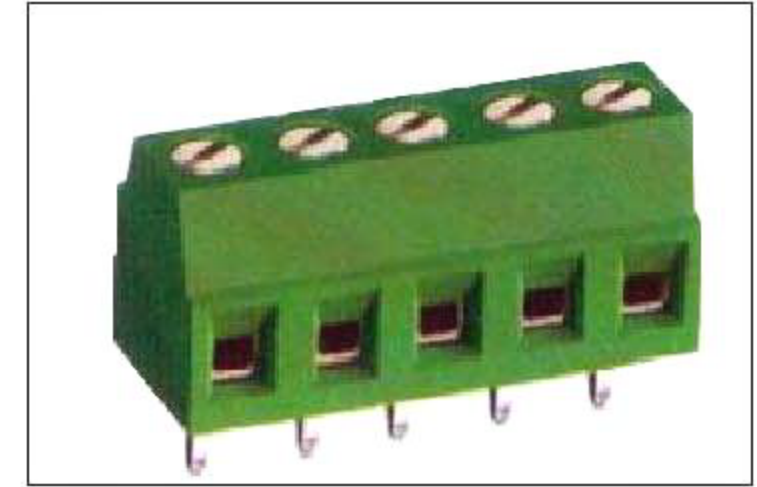

SPECIFICATIONS

負載電壓	Rated Voltage	AC 300V
負載電流	Rated Current	10A
電線線徑	Wire Size	26~16AWG
塑膠本體	Housing Material	Polyamide66
押線圈	Cage Clamp	Brass, Ni plated
端子	Terminal	Brass, Tin plated
螺絲	Screw Size	M2.0, steel, Ni plated
操作溫度	Operating Temperature	-40°C to + 105°C
扭力	Torque	2.0 lb-inch
PC板孔徑	PCB Hole Diameter	φ 1.3mm
Pole Size : 2 ~ 16P		

UNIT 單位	SCALE 比例	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		
MM		MATL 材料:	TITLE STHC-381-__P	
		FINISH 處理:		
		DESIGN 設計:		
ANGLE 角度	○	APPR 核准	PART NO 料號:	REV 版次
	⊙		DRAW NO 圖號:	A