


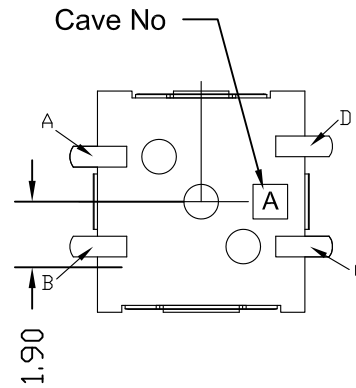
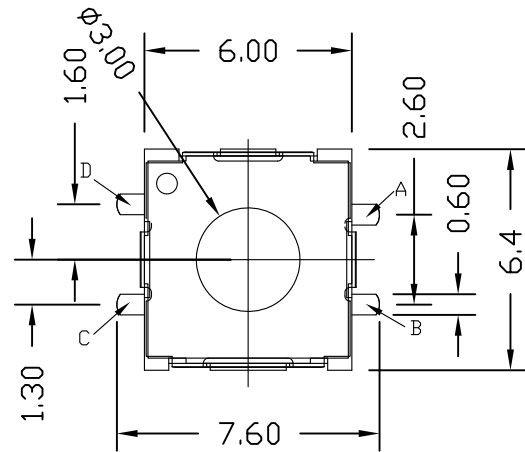


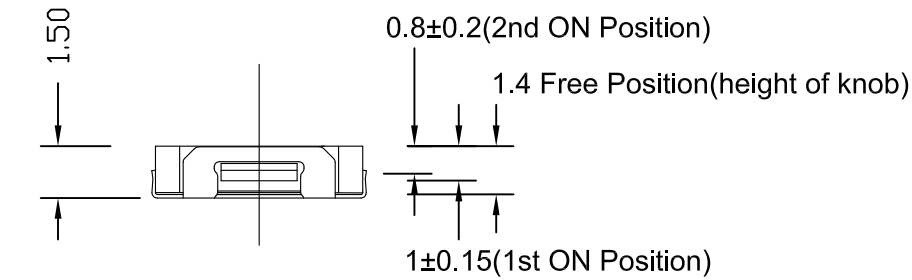

CIRCUIT DIAGREM



1st Push on



2nd Push On


SPECIFICATION

- 1.Rating : 50mA 12Vdc
- 2.Contact resistance : 200m Ohm
- 3.Operating life:300,000 cycles
- 4.Operating Force: 1st=100±30gf 2nd=260±50gf
- 5.Without guide pin,Metal cap is Ag-plated
- 6.RoHS compliant

DWG NO	SDAS-04
INNER NO	5-800-0007

LTR	DESCRIPTION	DATE	CHANGE	APPL'
△				
△				
△				

P.C.B. LAYOUT

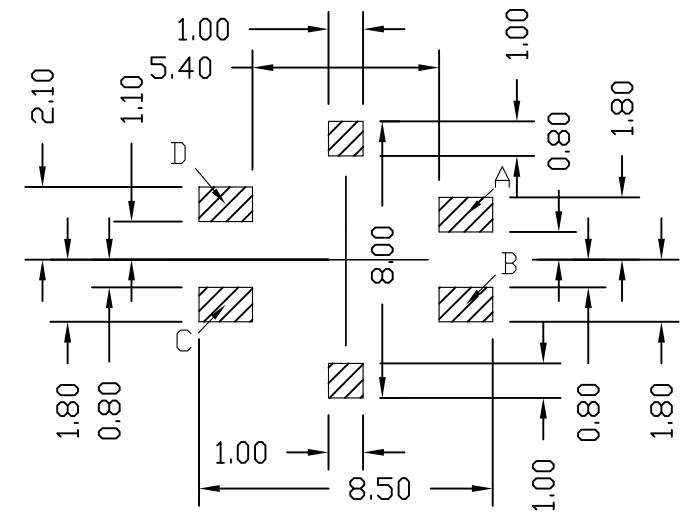

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

TOLERANCES		DESCRIPTION:		
ANGULAR	LINEAR	Double Action Switch		
0°±2'	0±0.5	PART NO: SDAS-04		
0.0°±1'	0.0±0.2			
0.00°±0.5'	0.00±0.05	DRAWN	CHECK	APPROVAL
0.000°±0.25'	0.000±0.005	Jase 2012/5/22	Jerry	
04-P-02-03-B		SHEET:	VER: A	UNIT: mm