


A
B
C
D
E
F
G
H


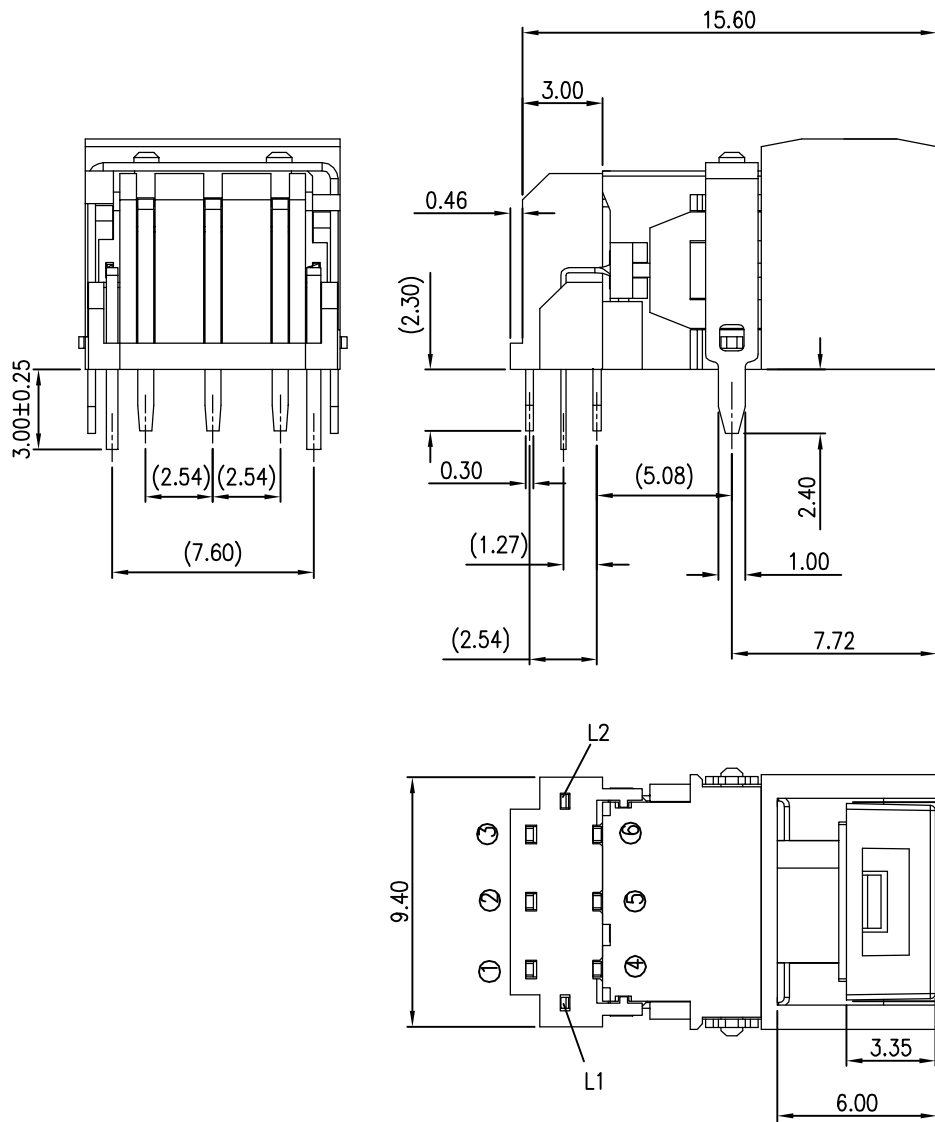


NOTE:

1.GENERAL TOLERANCES MAX.±0.20mm.

SPECIFICATIONS:

- 1.RATING: DC 30V 0.1A
- 2.LIFE: 10,000 cycles
- 3.OPERATION FORCE: 250gf±100gf
- 4.STROKE: 1.5+0.5/-0mm
- 5.CONTACT RESISTANCE: 50m Ω MAX.
- 6.DIELECTRIC STRENGTH: AC 50V(50Hz) 1 MINUTE
- 7.INSULATION RESISTANCE: 100M Ω MIN.
- 8.OPERATION TEMPERATURE RANGE: -10°C~+70°C

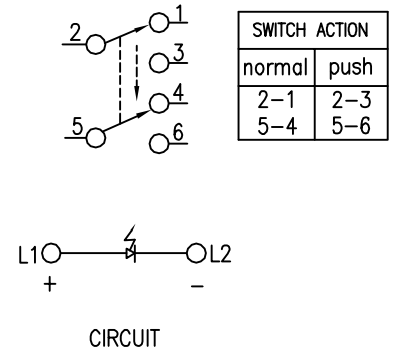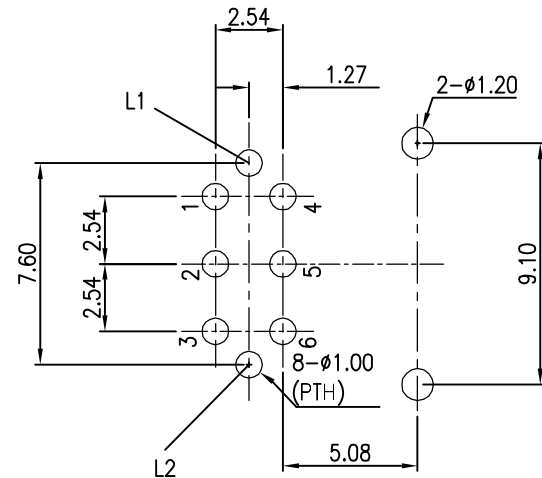

△				
△				
△				
△	A	DWG. REL.	12'05.08	
ZONE	REV.	DESCRIPTION	DATE	APPD.

APPD:	QTY:	喜威達企業股份有限公司		PART NAME:
CHKD:	SCALE: 5:1	SWEETA PRODUCTS CORPORATION		Push Tact Switch+LED
DR:	REV: A	UNITS: mm	PART NO:	DWG NO:
DESIGN:			SMLB-A13_QA-0	RDMPS2
			MAT'L:	
			FINISH:	