
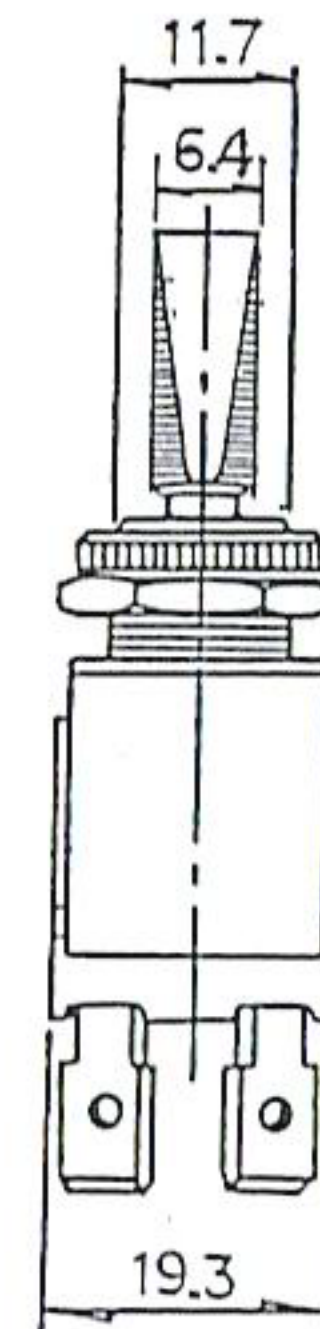


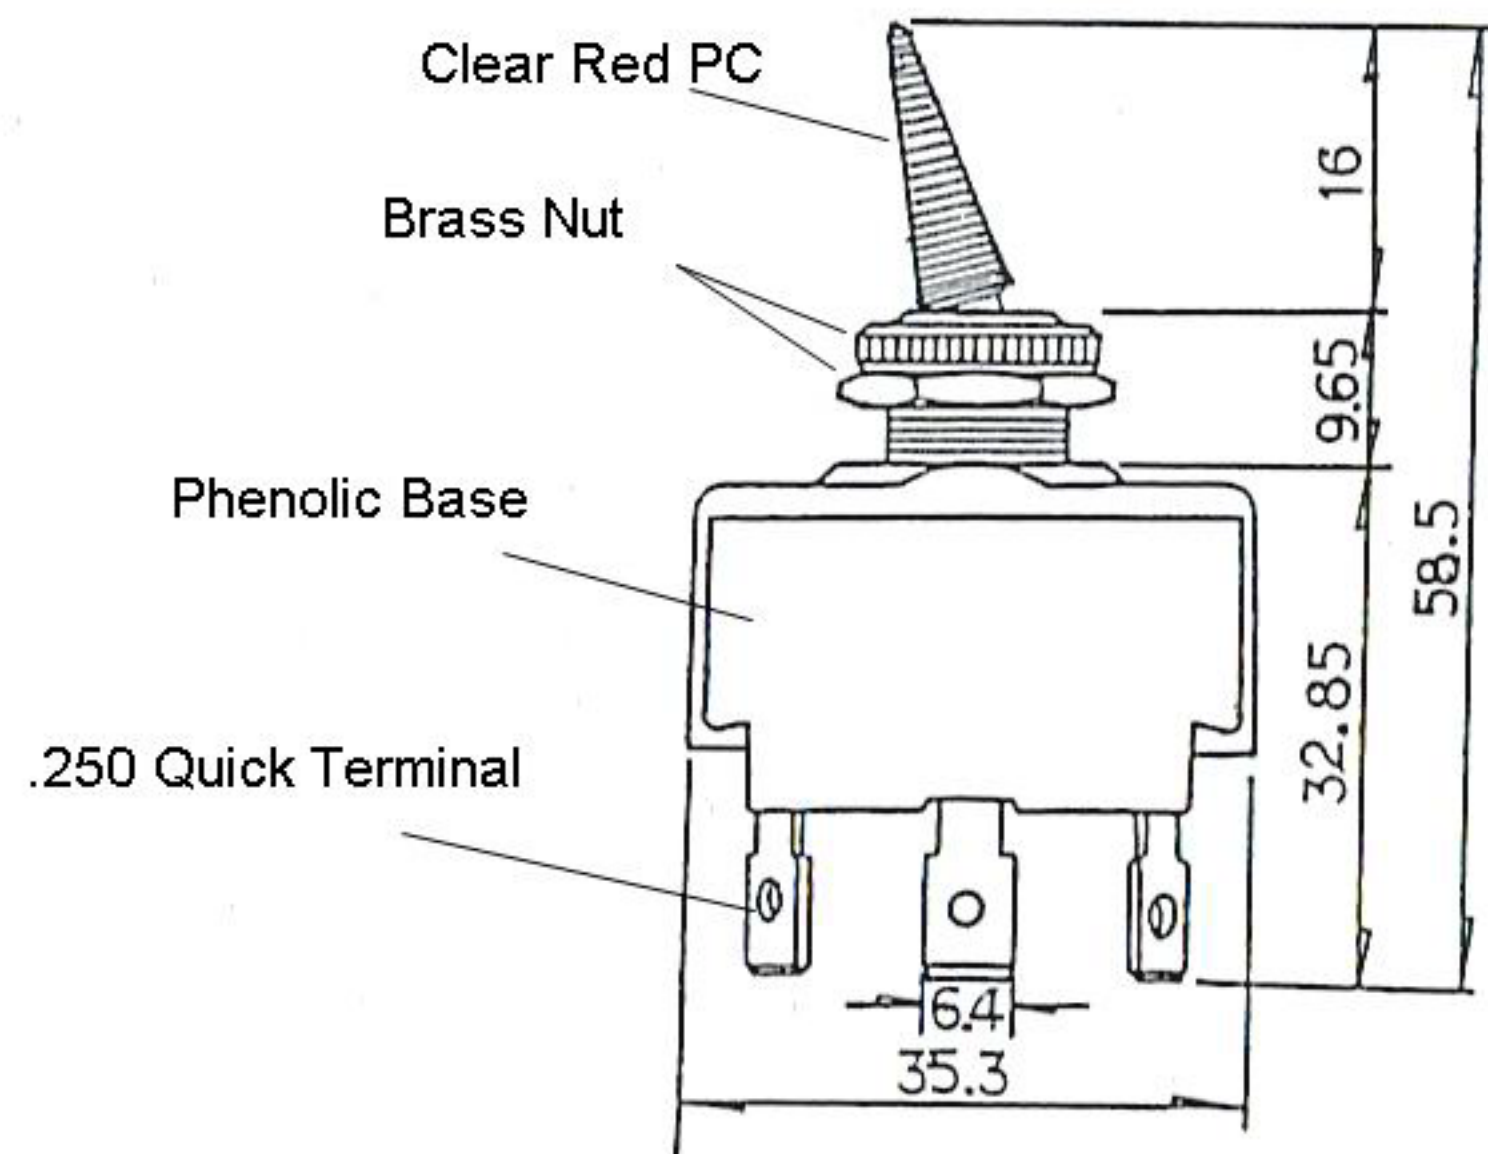

Characteristics :

Contact resistance: 50mΩ max. (Initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,000V AC 50/60Hz for 1 minute


Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating: 15A 12V DC

Circuit-Position: D.P.D.T.

Function: ON-OFF-ON



Mounting Hole

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

TOLERANCES

X . ±1
XX . ±0.5
XXX ±0.25

UNLESS NOTED

MIN WALL THKNS .06
MAX DRAFT 2/SIDE
ALL RADII .03

DATE 10/1/88 BY: H.D.GH PROJ: J. YEH EXLNO.

NAME: Toggle Switch (Illuminated)

1ST USED ON SCALE 1:1 PRODNO. SSW-2726-CD3-2L IREV: J. YEH