


Panel Cutout

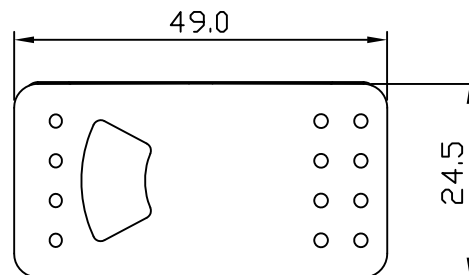

Specification :

Contact resistance: 20mΩ max. (initial)

Insulation resistance: 100MΩ min. (at 500V DC)

Dielectric strength: 1,500V AC 50/60 Hz for 1 minute



Service life: Mechanically: 100,000 operations min.

Electrically: 30,000 operations min.

Rating : 25A 12V DC

Circuit: ON - NONE - OFF SPST

POS 1 POS 2 POS 3
w/Red LED

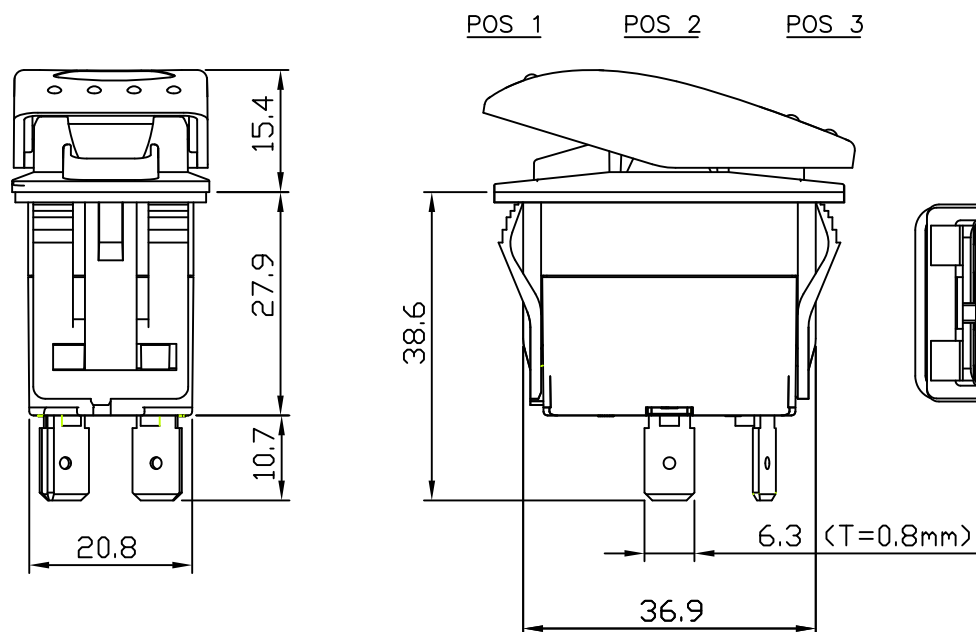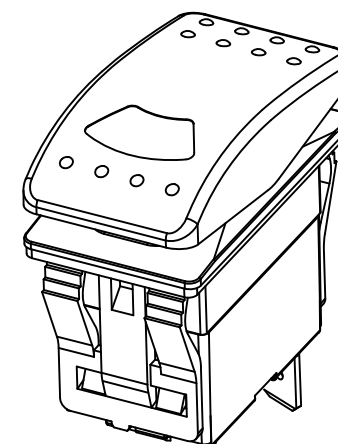

PS: 1,2,4 三支脚

TOLERANCES		UNLESS NOTED	
X.	± 0.3	MIN WALL THICKNESS	
X.X	± 0.2	MAX. DRAFT 2 / SIDE	
X.XX	± 0.1	ALL RADII	
DATE:	DRAWN:	PROJ:	EX.NO.
5-28-2011	C.H. SHI	W. D. CHEN	
NAME Sealed Rocker Switch (Illuminated)			
UNIT	SCALE	PROD. NO	REV.
■ m/m □ inch	1 : 1	SR-2893A2G4-1L	W.H.YEH

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

Material :

Finished :