

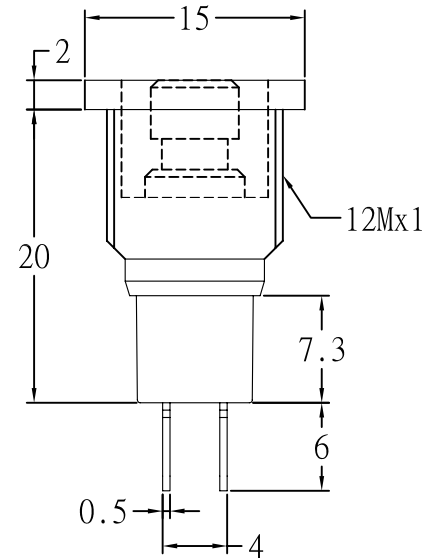




1. Electrical rating: 1A 125V AC / 0.5A 250V AC
2. Circuit: 2P (SPST)
3. Function: PUSH ON-OFF
4. Contact Resistance: 2.5V DC 10m Ω or less
5. Insulation Resistance: 500V DC 100M Ω or More
6. Voltage Breakdown: 1000V AC 1min
7. Electrical life: 10000 cycles
8. Temperture rise at the terminal: Max. 30°C
9. Solder ability of terminal: Max. 300°C 3 Sec
10. Mtg. Hole Dial mm: 12 $\varnothing$ mm


Button Color
Black
Red
White

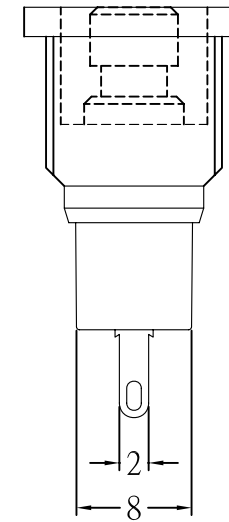

Top View



Bottom View



照 片 PHOTO



喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION

日期 DATE	審 核 CHECKED BY	繪 圖 DRAWIN BY
2013-10-15	<i>Leslie</i>	<i>Jason</i>

品 名 TITLE	Push Switch	修 定 REV.			
品 號 MODEL NO	SPA-003-3	公 差 TOLERANCE			
圖 號 DWG NO	F003-3				
檔案號 FILE NO		比 例 SCALE	2:1	單 位 UNIT	mm