

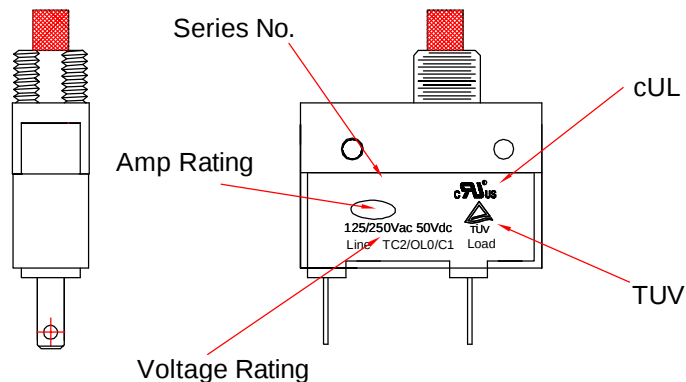





Material List

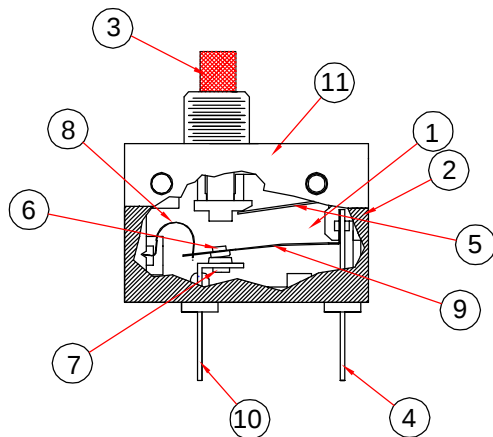

Name	Material
1 Basic	PBT 94-V0
2 Enclosure	PBT 94-V0
3 Push Rod	PBT 94-V0 or PC
4 #1 Terminal	Copper alloy C2680 0.5t
5 #1 Spring Sheet	SUS301 0.2t
6 #1 Contact	AgNi
7 #2 Contact	AgNi
8 #2 Spring Sheet	Copper alloy C5210 0.08t
9 Elastic Sheet	Bimetal (EMS or Sumitomo)
10 #2 Terminal	Copper alloy C2680 0.5t
11 Fitting Type	ABS+M8X0.75
Item no	SCB91 Series Thermal Circuit Breaker

NO	DESCRIPTION	APPROVED	DATE	TOLERANCE	APPROVED	CHECK	DESING	DRAWER	UNIT	mm	
5				DIMENSION	TOLERANCE				SCALE	1:1	
4				XX.XX	±0.05				REV	D/0	
3				XX.X	±0.1				DATE	2010.03.01	
2				XX	±0.15				TITLE	Material List	
1				ANGLE	TOLERANCE	FILE NO	SCB91 Series Motor Protectors		DRAWING NO	990301-001	
				X	±1°						
				X.X	±0.5°						



Order Guide:

SCB91- **A** **T** **R** - **3.15A** - **0** **0**

Type of Button
按鍵規格

Fitting Plate
固定方式

Color of Button
按鍵顏色

Rating Amp
電流額定

Terminal Type
端子種類

Terminal Finish
端子處理

Terminal Finish	
0	Plate with Tin
N	Plate with Nickel

Type of Button	
A	
B	
C	

Fitting Plate	
N No Fiting	
P Plastic	
T Metal	
M Metal	

Color of Button		
R	Red	紅
B	Black	黑
Y	Yellow	黃
U	Bule	藍
G	Gray	灰
O	Orange	橘

Rating Amp	
0.6A	3.3A
0.7A	3.5A
0.8A	3.75A
1.0A	4.0A
1.25A	4.5A
1.4A	5.0A
1.5A	5.5A
1.6A	6.0A
1.75A	6.3A
2.0A	6.5A
2.25A	7.0A
2.5A	7.5A
2.75A	8.0A
3.0A	9.0A
3.15A	10.0A

Terminal Type	
0	
B	
2	
L	
Y	